



13.6m — 50.0m

メインブーム

AS性能 C/W 100t O/R 9.2m C/S使用 ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	200.0	175.0	150.0							
3.5	200.0	175.0	150.0							
4.0	200.0	175.0	141.4	155.0	160.0	153.0	83.0			
4.5	200.0	175.0	134.2	155.0	160.0	146.2	80.7	135.0	155.0	155.0
5.0	200.0	175.0	127.7	155.0	160.0	137.5	75.6	135.0	155.0	148.8
6.0	182.5	175.0	116.6	155.0	159.6	122.9	67.2	135.0	155.0	135.5
7.0	162.8	156.7	107.3	154.3	144.2	111.1	60.4	135.0	152.1	123.5
8.0	145.5	141.3	99.5	139.0	131.4	101.4	54.8	125.2	137.0	113.5
9.0	128.2	128.4	92.9	126.3	120.7	93.2	50.2	113.6	124.6	105.0
10.0	113.6	113.8	87.2	113.0	111.6	86.2	46.5	103.8	114.1	97.6
11.0	95.9	101.8	82.4	101.1	103.2	80.2	43.5	95.5	102.3	91.3
12.0		91.9	78.1	91.1	93.3	75.0	40.5	88.3	92.4	85.3
14.0		76.3	71.4	75.5	77.7	66.4	36.0	74.5	76.8	75.1
16.0		54.2	56.4	63.8	66.0	59.7	32.5	62.8	65.1	66.9
18.0				54.8	57.0	54.3	29.5	53.7	56.0	58.6
20.0				44.1	46.3	48.1	26.5	46.4	48.8	51.4
22.0								40.5	42.9	45.5
24.0								35.0	37.4	39.9
危険角度 (°)	-	-	-	-	-	-	-	-	-	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム		50.0mブーム
5.0	132.0	135.0	115.0	83.0									
6.0	132.0	135.0	108.4	76.5	115.0	105.0	80.0						
7.0	129.7	133.2	97.5	68.7	115.0	105.0	74.4	100.0	83.0	78.0			
8.0	116.9	123.1	88.5	62.3	109.4	95.5	67.9	100.0	83.0	72.1	83.0	74.0	70.0
9.0	105.9	114.5	81.0	56.9	99.7	87.9	62.4	93.0	80.0	66.6	83.0	70.0	70.0
10.0	96.7	107.0	74.5	52.4	91.5	81.3	57.7	85.7	73.9	61.8	78.4	65.2	70.0
11.0	88.8	100.4	68.8	48.5	84.5	75.6	53.6	79.2	68.6	57.6	73.0	61.0	64.2
12.0	82.1	94.0	63.8	45.1	78.4	70.7	50.0	73.2	64.0	53.9	68.3	57.5	60.5
14.0	71.0	78.4	55.5	39.4	68.0	62.0	44.1	63.7	56.3	47.8	60.4	51.5	54.1
16.0	62.3	66.7	49.0	34.7	59.7	55.1	39.3	56.2	50.1	42.7	53.3	45.9	49.0
18.0	54.9	57.6	43.8	31.0	53.0	49.6	35.4	50.0	45.1	38.2	47.5	41.7	44.7
20.0	47.6	50.3	39.4	27.9	47.5	44.9	32.1	45.0	40.9	34.4	42.7	37.7	40.5
22.0	41.7	44.4	35.8	25.3	42.9	41.0	29.3	40.5	37.3	31.1	38.7	34.3	36.6
24.0	36.8	39.5	32.8	23.2	38.3	37.7	26.9	36.7	34.1	28.2	35.2	31.4	33.3
26.0	32.7	35.4	30.2	21.3	34.2	34.9	24.9	33.5	31.3	25.8	32.3	28.8	30.5
28.0	29.2	31.9	28.0	19.8	30.6	31.8	23.1	30.6	28.9	23.7	29.7	26.5	28.0
30.0					27.6	28.8	21.6	27.5	26.8	21.9	27.5	24.5	25.9
32.0					24.9	26.2	20.3	24.9	24.9	20.3	25.4	22.8	24.0
34.0					16.9	18.0	19.3	22.5	23.3	18.8	23.2	21.3	22.4
36.0								20.5	21.8	17.6	21.1	19.9	20.9
38.0								15.7	17.3	16.5	19.3	18.7	19.6
40.0											17.6	17.6	18.4
42.0											14.5	16.3	16.9
44.0													15.6
46.0													13.6
48.0													6.2
危険角度 (°)	-	-	-	-	-	-	-	-	-	-	-	-	4
伸長状態 (伸長割合%)													
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

A1性能 C/W 100t O/R 9.2m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	200.0	175.0	150.0							
3.5	200.0	175.0	150.0							
4.0	200.0	175.0	141.4	155.0	160.0	153.0	83.0			
4.5	200.0	175.0	134.2	155.0	160.0	146.2	80.7	135.0	155.0	155.0
5.0	194.5	175.0	127.7	155.0	160.0	137.5	75.6	135.0	155.0	148.8
6.0	167.0	167.1	116.6	155.0	159.6	122.9	67.2	135.0	155.0	135.5
7.0	145.9	146.0	107.3	145.4	144.2	111.1	60.4	135.0	146.4	123.5
8.0	129.0	129.2	99.5	128.6	130.3	101.4	54.8	125.2	129.6	113.5
9.0	115.4	115.5	92.9	114.9	116.7	93.2	50.2	113.6	115.9	105.0
10.0	104.1	104.1	87.2	103.5	105.3	86.2	46.5	102.6	104.6	97.6
11.0	94.5	94.6	82.4	93.9	95.8	80.2	43.5	93.1	95.0	91.3
12.0		86.4	78.1	85.8	87.7	75.0	40.5	84.9	86.9	85.3
14.0		73.3	71.4	72.6	74.5	66.4	36.0	71.6	73.7	75.1
16.0		54.2	56.4	62.4	64.4	59.7	32.5	61.4	63.5	65.8
18.0				54.3	56.3	54.3	29.5	53.2	55.4	57.8
20.0				44.1	46.3	48.1	26.5	46.4	48.8	51.2
22.0								40.5	42.9	45.5
24.0								35.0	37.4	39.9
危険角度 (°)	-	-	-	-	-	-	-	-	-	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム		50.0mブーム
5.0	132.0	135.0	115.0	83.0									
6.0	132.0	135.0	108.4	76.5	115.0	105.0	80.0						
7.0	129.7	133.2	97.5	68.7	115.0	105.0	74.4	100.0	83.0	78.0			
8.0	116.9	123.1	88.5	62.3	109.4	95.5	67.9	100.0	83.0	72.1	83.0	74.0	70.0
9.0	105.9	114.5	81.0	56.9	99.7	87.9	62.4	93.0	80.0	66.6	83.0	70.0	70.0
10.0	96.7	106.0	74.5	52.4	91.5	81.3	57.7	85.7	73.9	61.8	78.4	65.2	70.0
11.0	88.8	96.5	68.8	48.5	84.5	75.6	53.6	79.2	68.6	57.6	73.0	61.0	64.2
12.0	82.1	88.3	63.8	45.1	78.4	70.7	50.0	73.2	64.0	53.9	68.3	57.5	60.5
14.0	71.0	75.1	55.5	39.4	68.0	62.0	44.1	63.7	56.3	47.8	60.4	51.5	54.1
16.0	62.3	64.9	49.0	34.7	59.7	55.1	39.3	56.2	50.1	42.7	53.3	45.9	49.0
18.0	54.3	56.8	43.8	31.0	53.0	49.6	35.4	50.0	45.1	38.2	47.5	41.7	44.7
20.0	47.6	50.2	39.4	27.9	47.5	44.9	32.1	45.0	40.9	34.4	42.7	37.7	40.5
22.0	41.7	44.4	35.8	25.3	42.9	41.0	29.3	40.5	37.3	31.1	38.7	34.3	36.6
24.0	36.8	39.5	32.8	23.2	38.3	37.7	26.9	36.7	34.1	28.2	35.2	31.4	33.3
26.0	32.7	35.4	30.2	21.3	34.2	34.9	24.9	33.5	31.3	25.8	32.3	28.8	30.5
28.0	29.2	31.9	28.0	19.8	30.6	31.8	23.1	30.6	28.9	23.7	29.7	26.5	28.0
30.0					27.6	28.8	21.6	27.5	26.8	21.9	27.5	24.5	25.9
32.0					24.9	26.2	20.3	24.9	24.9	20.3	25.4	22.8	24.0
34.0					16.9	18.0	19.3	22.5	23.3	18.8	23.2	21.3	22.4
36.0								20.5	21.8	17.6	21.1	19.9	20.9
38.0								15.7	17.3	16.5	19.3	18.7	19.6
40.0											17.6	17.6	18.4
42.0											14.5	16.3	16.9
44.0													15.6
46.0													13.6
48.0													6.2
危険角度 (°)	-	-	-	-	-	-	-	-	-	-	-	-	4

伸長状態 (伸長割合%)

ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

A2性能 C/W 100t O/R 8.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	200.0	175.0	150.0							
3.5	200.0	175.0	150.0							
4.0	200.0	175.0	141.4	155.0	160.0	153.0	83.0			
4.5	200.0	175.0	134.2	155.0	160.0	146.2	80.7	135.0	155.0	155.0
5.0	194.5	175.0	127.7	155.0	160.0	137.5	75.6	135.0	155.0	148.8
6.0	167.0	167.1	116.6	155.0	159.6	122.9	67.2	135.0	155.0	135.5
7.0	145.9	146.0	107.3	145.4	144.2	111.1	60.4	135.0	146.4	123.5
8.0	129.0	129.2	99.5	128.6	130.3	101.4	54.8	125.2	129.6	113.5
9.0	115.4	115.5	92.9	114.9	116.7	93.2	50.2	113.6	115.9	105.0
10.0	104.1	104.1	87.2	103.5	105.3	86.2	46.5	102.6	104.6	97.6
11.0	94.5	94.6	82.4	93.9	95.8	80.2	43.5	93.1	95.0	91.3
12.0		86.4	78.1	85.8	87.7	75.0	40.5	84.9	86.9	85.3
14.0		73.3	71.4	72.6	74.5	66.4	36.0	71.6	73.7	75.1
16.0		54.2	56.4	62.4	64.4	59.7	32.5	61.4	63.5	65.8
18.0				54.3	56.3	54.3	29.5	53.2	55.4	57.8
20.0				44.1	46.3	48.1	26.5	46.4	48.8	51.2
22.0								40.4	42.5	45.5
24.0								35.0	37.1	39.4
危険角度 (°)	-	-	-	-	-	-	-	-	-	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム		50.0mブーム
5.0	132.0	135.0	115.0	83.0									
6.0	132.0	135.0	108.4	76.5	115.0	105.0	80.0						
7.0	129.7	133.2	97.5	68.7	115.0	105.0	74.4	100.0	83.0	78.0			
8.0	116.9	123.1	88.5	62.3	109.4	95.5	67.9	100.0	83.0	72.1	83.0	74.0	70.0
9.0	105.9	114.5	81.0	56.9	99.7	87.9	62.4	93.0	80.0	66.6	83.0	70.0	70.0
10.0	96.7	106.0	74.5	52.4	91.5	81.3	57.7	85.7	73.9	61.8	78.4	65.2	70.0
11.0	88.8	96.5	68.8	48.5	84.5	75.6	53.6	79.2	68.6	57.6	73.0	61.0	64.2
12.0	82.1	88.3	63.8	45.1	78.4	70.7	50.0	73.2	64.0	53.9	68.3	57.5	60.5
14.0	71.0	75.1	55.5	39.4	68.0	62.0	44.1	63.7	56.3	47.8	60.4	51.5	54.1
16.0	62.3	64.9	49.0	34.7	59.7	55.1	39.3	56.2	50.1	42.7	53.3	45.9	49.0
18.0	54.3	56.8	43.8	31.0	53.0	49.6	35.4	50.0	45.1	38.2	47.5	41.7	44.7
20.0	47.6	50.2	39.4	27.9	47.5	44.9	32.1	45.0	40.9	34.4	42.7	37.7	40.5
22.0	41.5	43.8	35.8	25.3	42.8	41.0	29.3	40.5	37.3	31.1	38.7	34.3	36.6
24.0	36.0	38.4	32.8	23.2	37.3	37.7	26.9	36.7	34.1	28.2	35.2	31.4	33.3
26.0	31.6	33.9	30.2	21.3	32.9	33.9	24.9	32.9	31.3	25.8	32.3	28.8	30.5
28.0	28.0	30.3	28.0	19.8	29.2	30.2	23.1	29.2	28.9	23.7	29.7	26.5	28.0
30.0					26.1	27.1	21.6	26.1	26.8	21.9	26.7	24.5	25.9
32.0					23.5	24.5	20.3	23.4	24.9	20.3	24.0	22.8	24.0
34.0					16.9	18.0	19.3	21.1	22.6	18.8	21.7	21.3	22.4
36.0								19.2	20.6	17.6	19.7	19.9	20.4
38.0								15.7	17.3	16.5	17.9	18.7	18.6
40.0											16.4	17.6	17.0
42.0											14.5	16.3	15.6
44.0													14.3
46.0													13.2
48.0													6.2
危険角度 (°)	-	-	-	-	-	-	-	-	-	-	-	-	4
伸長状態 (伸長割合%)													
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

B1性能 C/W 60t O/R 9.2m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	200.0	175.0	150.0							
3.5	200.0	175.0	150.0							
4.0	193.5	175.0	141.4	155.0	160.0	153.0	83.0			
4.5	176.5	175.0	134.2	155.0	160.0	146.2	80.7	135.0	155.0	155.0
5.0	162.1	162.2	127.7	155.0	160.0	137.5	75.6	135.0	155.0	148.8
6.0	138.8	138.9	116.6	138.3	140.0	122.9	67.2	135.0	139.3	135.5
7.0	120.8	121.0	107.3	120.4	122.1	111.1	60.4	119.6	121.4	123.5
8.0	106.6	106.7	99.5	106.1	107.9	101.4	54.8	105.3	107.2	109.3
9.0	95.0	95.1	92.9	94.5	96.3	93.2	50.2	93.7	95.6	97.8
10.0	85.4	85.5	87.2	84.9	86.7	86.2	46.5	84.0	86.0	88.2
11.0	77.4	77.4	79.4	76.8	78.6	80.2	43.5	75.9	77.9	80.1
12.0		69.8	72.2	69.1	71.2	73.2	40.5	68.1	70.4	73.0
14.0		57.4	59.7	56.6	58.8	60.7	36.0	55.6	57.9	60.5
16.0		48.2	50.5	47.3	49.5	51.4	32.5	46.2	48.5	51.1
18.0				40.1	42.3	44.2	29.5	39.0	41.3	43.9
20.0				34.4	36.6	38.3	26.5	33.2	35.6	37.9
22.0								28.2	30.4	32.7
24.0								24.0	26.2	28.5
危険角度 (°)	-	-	-	-	-	-	-	-	-	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム		50.0mブーム
5.0	132.0	135.0	115.0	83.0									
6.0	132.0	135.0	108.4	76.5	115.0	105.0	80.0						
7.0	120.5	122.8	97.5	68.7	115.0	105.0	74.4	100.0	83.0	78.0			
8.0	106.3	108.5	88.5	62.3	107.7	95.5	67.9	100.0	83.0	72.1	83.0	74.0	70.0
9.0	94.7	97.0	81.0	56.9	96.1	87.9	62.4	93.0	80.0	66.6	83.0	70.0	70.0
10.0	85.1	87.4	74.5	52.4	86.5	81.3	57.7	85.7	73.9	61.8	78.4	65.2	70.0
11.0	76.9	79.3	68.8	48.5	78.4	75.6	53.6	78.4	68.6	57.6	73.0	61.0	64.2
12.0	69.3	72.0	63.8	45.1	70.9	70.7	50.0	71.0	64.0	53.9	68.3	57.5	60.5
14.0	56.8	59.5	55.5	39.4	58.4	59.6	44.1	58.5	56.3	47.8	59.4	51.5	54.1
16.0	47.4	50.1	49.0	34.7	49.0	50.3	39.3	49.1	50.1	42.7	50.0	45.9	49.0
18.0	40.2	42.9	43.5	31.0	41.8	43.0	35.4	41.8	43.8	38.2	42.7	41.7	43.7
20.0	34.4	37.0	37.5	27.9	36.0	37.1	32.1	36.0	37.8	34.4	36.8	37.7	37.5
22.0	29.3	31.7	32.2	25.3	30.7	31.7	29.3	30.7	32.4	31.1	31.5	33.1	32.2
24.0	25.0	27.4	27.9	23.2	26.4	27.4	26.9	26.4	28.1	28.2	27.1	28.8	27.8
26.0	21.6	23.9	24.4	21.3	22.8	23.9	24.9	22.8	24.5	25.7	23.6	25.2	24.3
28.0	18.7	21.1	21.5	19.8	19.9	21.0	23.1	19.9	21.6	22.7	20.6	22.2	21.3
30.0					17.5	18.5	20.8	17.5	19.1	20.2	18.1	19.7	18.8
32.0					15.5	16.5	18.7	15.4	17.0	18.1	16.0	17.6	16.7
34.0					13.8	14.8	17.0	13.7	15.2	16.3	14.2	15.8	14.9
36.0								12.2	13.6	14.7	12.7	14.2	13.3
38.0								10.9	12.3	13.4	11.3	12.8	11.9
40.0											10.1	11.6	10.7
42.0											9.1	10.6	9.6
44.0													8.7
46.0													7.8
48.0													6.2
危険角度 (°)	-	-	-	-	-	-	-	-	-	-	-	-	4
伸長状態 (伸長割合%)													
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

B2性能 C/W 60t O/R 8.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	200.0	175.0	150.0							
3.5	200.0	175.0	150.0							
4.0	193.5	175.0	141.4	155.0	160.0	153.0	83.0			
4.5	176.5	175.0	134.2	155.0	160.0	146.2	80.7	135.0	155.0	155.0
5.0	162.1	162.2	127.7	155.0	160.0	137.5	75.6	135.0	155.0	148.8
6.0	138.8	138.9	116.6	138.3	140.0	122.9	67.2	135.0	139.3	135.5
7.0	120.8	121.0	107.3	120.4	122.1	111.1	60.4	119.6	121.4	123.5
8.0	106.6	106.7	99.5	106.1	107.9	101.4	54.8	105.3	107.2	109.3
9.0	95.0	95.1	92.9	94.5	96.3	93.2	50.2	93.7	95.6	97.8
10.0	85.4	85.5	87.2	84.9	86.7	86.2	46.5	84.0	86.0	88.2
11.0	77.4	77.4	79.4	76.8	78.6	80.2	43.5	75.9	77.9	80.1
12.0		69.8	72.2	69.1	71.2	73.2	40.5	68.1	70.4	73.0
14.0		57.4	59.7	56.6	58.8	60.7	36.0	55.6	57.9	60.5
16.0		46.4	48.6	45.5	47.7	49.5	32.5	44.5	46.7	49.3
18.0				37.1	39.2	41.0	29.5	36.1	38.3	40.7
20.0				30.9	32.9	34.6	26.5	29.8	31.9	34.3
22.0								25.0	27.1	29.4
24.0								21.2	23.3	25.5
危険角度 (°)	-	-	-	-	-	-	-	-	-	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム		50.0mブーム
5.0	132.0	135.0	115.0	83.0									
6.0	132.0	135.0	108.4	76.5	115.0	105.0	80.0						
7.0	120.5	122.8	97.5	68.7	115.0	105.0	74.4	100.0	83.0	78.0			
8.0	106.3	108.5	88.5	62.3	107.7	95.5	67.9	100.0	83.0	72.1	83.0	74.0	70.0
9.0	94.7	97.0	81.0	56.9	96.1	87.9	62.4	93.0	80.0	66.6	83.0	70.0	70.0
10.0	85.1	87.4	74.5	52.4	86.5	81.3	57.7	85.7	73.9	61.8	78.4	65.2	70.0
11.0	76.9	79.3	68.8	48.5	78.4	75.6	53.6	78.4	68.6	57.6	73.0	61.0	64.2
12.0	69.3	72.0	63.8	45.1	70.9	70.7	50.0	71.0	64.0	53.9	68.3	57.5	60.5
14.0	56.8	59.5	55.5	39.4	58.4	59.6	44.1	58.5	56.3	47.8	59.4	51.5	54.1
16.0	45.7	48.3	48.9	34.7	47.2	48.4	39.3	47.3	49.2	42.7	48.2	45.9	49.0
18.0	37.2	39.7	40.3	31.0	38.7	39.8	35.4	38.7	40.6	38.2	39.6	41.3	40.3
20.0	30.9	33.3	33.9	27.9	32.3	33.4	32.1	32.3	34.1	34.4	33.2	34.8	33.9
22.0	26.0	28.4	28.9	25.3	27.4	28.4	29.3	27.4	29.1	30.3	28.2	29.8	28.9
24.0	22.2	24.5	25.0	23.2	23.5	24.5	26.9	23.5	25.1	26.3	24.2	25.8	24.9
26.0	19.0	21.3	21.8	21.3	20.3	21.3	23.7	20.3	21.9	23.1	21.0	22.6	21.7
28.0	16.5	18.7	19.2	19.8	17.6	18.7	21.0	17.6	19.2	20.4	18.3	19.9	19.0
30.0					15.4	16.4	18.7	15.4	17.0	18.1	16.1	17.6	16.7
32.0					13.6	14.6	16.8	13.5	15.0	16.2	14.1	15.7	14.8
34.0					12.0	13.0	15.2	11.9	13.4	14.5	12.5	14.0	13.1
36.0								10.5	12.0	13.1	11.0	12.5	11.6
38.0								9.4	10.8	11.9	9.8	11.3	10.4
40.0											8.7	10.2	9.3
42.0											7.5	9.2	8.3
44.0													7.2
46.0													6.3
48.0													5.6
危険角度 (°)	-	-	-	-	-	-	-	-	-	-	-	-	4
伸長状態 (伸長割合%)													
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

B3性能 C/W 60t O/R 7.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	200.0	175.0	150.0							
3.5	200.0	175.0	150.0							
4.0	193.5	175.0	141.4	155.0	160.0	153.0	83.0			
4.5	176.5	175.0	134.2	155.0	160.0	146.2	80.7	135.0	155.0	155.0
5.0	162.1	162.2	127.7	155.0	160.0	137.5	75.6	135.0	155.0	148.8
6.0	138.8	138.9	116.6	138.3	140.0	122.9	67.2	135.0	139.3	135.5
7.0	120.8	121.0	107.3	120.4	122.1	111.1	60.4	119.6	121.4	123.5
8.0	106.6	106.7	99.5	106.1	107.9	101.4	54.8	105.3	107.2	109.3
9.0	95.0	95.1	92.9	94.5	96.3	93.2	50.2	93.7	95.6	97.8
10.0	83.1	83.2	85.7	82.5	84.8	86.2	46.5	81.4	83.9	86.6
11.0	70.1	70.2	72.6	69.5	71.7	73.6	43.5	68.5	70.8	73.4
12.0		60.3	62.6	59.6	61.7	63.6	40.5	58.7	60.9	63.4
14.0		46.4	48.5	45.7	47.7	49.4	36.0	44.8	46.9	49.2
16.0		37.1	39.1	36.3	38.2	39.9	32.5	35.4	37.4	39.7
18.0				29.6	31.5	33.1	29.5	28.7	30.6	32.8
20.0				24.6	26.5	28.0	26.5	23.6	25.5	27.7
22.0								19.7	21.6	23.7
24.0								16.6	18.5	20.6
危険角度 (°)	-	-	-	-	-	-	-	-	-	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム		50.0mブーム
5.0	132.0	135.0	115.0	83.0									
6.0	132.0	135.0	108.4	76.5	115.0	105.0	80.0						
7.0	120.5	122.8	97.5	68.7	115.0	105.0	74.4	100.0	83.0	78.0			
8.0	106.3	108.5	88.5	62.3	107.7	95.5	67.9	100.0	83.0	72.1	83.0	74.0	70.0
9.0	94.7	97.0	81.0	56.9	96.1	87.9	62.4	93.0	80.0	66.6	83.0	70.0	70.0
10.0	82.7	85.6	74.5	52.4	84.5	81.3	57.7	84.5	73.9	61.8	78.4	65.2	70.0
11.0	69.7	72.5	68.8	48.5	71.4	72.6	53.6	71.4	68.6	57.6	72.4	61.0	64.2
12.0	59.9	62.5	63.1	45.1	61.4	62.6	50.0	61.5	63.4	53.9	62.4	57.5	60.5
14.0	45.9	48.3	48.9	39.4	47.4	48.4	44.1	47.4	49.2	47.8	48.3	49.9	49.0
16.0	36.5	38.8	39.4	34.7	37.9	38.9	39.3	37.9	39.6	40.8	38.7	40.3	39.4
18.0	29.7	32.0	32.5	31.0	31.0	32.0	34.4	31.1	32.7	33.9	31.8	33.4	32.5
20.0	24.6	26.8	27.3	27.9	25.9	26.9	29.2	25.9	27.5	28.6	26.6	28.2	27.3
22.0	20.6	22.8	23.3	25.0	21.9	22.8	25.1	21.9	23.5	24.6	22.6	24.1	23.2
24.0	17.5	19.6	20.1	21.7	18.7	19.6	21.8	18.7	20.2	21.3	19.4	20.8	20.0
26.0	14.9	17.0	17.4	19.1	16.0	17.0	19.1	16.1	17.5	18.6	16.7	18.2	17.3
28.0	12.8	14.9	15.3	16.9	13.9	14.8	16.9	13.9	15.3	16.4	14.5	15.9	15.1
30.0					12.1	13.0	15.0	12.0	13.5	14.5	12.6	14.0	13.2
32.0					10.5	11.4	13.5	10.5	11.9	12.9	11.0	12.4	11.6
34.0					9.3	10.2	12.1	9.1	10.5	11.5	9.6	11.0	10.2
36.0								8.0	9.3	10.3	8.4	9.8	9.0
38.0								7.0	8.3	9.3	7.4	8.8	7.9
40.0											6.5	7.9	7.0
42.0											5.6	7.1	6.2
44.0													5.4
46.0													4.5
危険角度 (°)	-	-	-	-	-	-	-	-	-	-	-	-	16
伸長状態 (伸長割合%)													
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

B4性能 C/W 60t O/R 6.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	200.0	175.0	150.0							
3.5	200.0	175.0	150.0							
4.0	193.5	175.0	141.4	155.0	160.0	153.0	83.0			
4.5	176.5	175.0	134.2	155.0	160.0	146.2	80.7	135.0	155.0	155.0
5.0	162.1	162.2	127.7	155.0	160.0	137.5	75.6	135.0	155.0	148.8
6.0	138.8	138.9	116.6	138.3	140.0	122.9	67.2	135.0	139.3	135.5
7.0	120.8	121.0	107.3	120.4	122.1	111.1	60.4	119.6	121.4	123.5
8.0	102.6	102.8	99.5	102.1	104.4	101.4	54.8	100.9	103.5	106.4
9.0	82.9	83.0	85.5	82.3	84.5	86.6	50.2	81.3	83.7	86.4
10.0	68.9	69.1	71.4	68.4	70.5	72.4	46.5	67.4	69.7	72.2
11.0	58.6	58.7	60.9	58.0	60.1	61.9	43.5	57.1	59.3	61.7
12.0		50.7	52.8	50.1	52.0	53.8	40.5	49.1	51.2	53.6
14.0		39.2	41.2	38.5	40.4	42.1	36.0	37.6	39.6	41.9
16.0		31.4	33.3	30.6	32.5	34.1	32.5	29.8	31.7	33.9
18.0				24.9	26.7	28.3	28.4	24.0	25.9	28.0
20.0				20.6	22.4	23.9	24.0	19.7	21.5	23.6
22.0								16.3	18.1	20.2
24.0								13.6	15.4	17.4
危険角度 (°)	-	-	-	-	-	-	-	-	-	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム		50.0mブーム
5.0	132.0	135.0	115.0	83.0									
6.0	132.0	135.0	108.4	76.5	115.0	105.0	80.0						
7.0	120.5	122.8	97.5	68.7	115.0	105.0	74.4	100.0	83.0	78.0			
8.0	102.3	105.4	88.5	62.3	104.2	95.5	67.9	100.0	83.0	72.1	83.0	74.0	70.0
9.0	82.6	85.4	81.0	56.9	84.3	85.5	62.4	84.3	80.0	66.6	83.0	70.0	70.0
10.0	68.6	71.3	72.0	52.4	70.2	71.4	57.7	70.3	72.3	61.8	71.3	65.2	70.0
11.0	58.3	60.8	61.4	48.5	59.8	60.9	53.6	59.9	61.8	57.6	60.8	61.0	61.5
12.0	50.3	52.7	53.3	45.1	51.7	52.8	50.0	51.8	53.6	53.9	52.7	54.4	53.4
14.0	38.7	41.0	41.6	39.4	40.1	41.1	43.7	40.1	41.9	43.1	41.0	42.6	41.7
16.0	30.8	33.0	33.6	34.7	32.1	33.1	35.5	32.2	33.8	35.0	32.9	34.5	33.6
18.0	25.0	27.2	27.7	29.4	26.3	27.3	29.6	26.3	27.9	29.0	27.1	28.6	27.7
20.0	20.6	22.8	23.2	24.9	21.9	22.8	25.1	21.9	23.5	24.5	22.6	24.1	23.2
22.0	17.2	19.3	19.8	21.4	18.4	19.3	21.5	18.4	19.9	21.0	19.1	20.6	19.7
24.0	14.4	16.5	17.0	18.6	15.6	16.5	18.7	15.6	17.1	18.1	16.3	17.7	16.9
26.0	12.2	14.2	14.7	16.3	13.3	14.2	16.3	13.3	14.8	15.8	13.9	15.4	14.5
28.0	10.3	12.4	12.8	14.3	11.4	12.3	14.4	11.4	12.8	13.8	12.0	13.4	12.6
30.0					9.8	10.7	12.7	9.8	11.2	12.2	10.3	11.7	10.9
32.0					8.4	9.3	11.3	8.4	9.8	10.8	8.9	10.3	9.5
34.0					7.3	8.2	10.2	7.2	8.5	9.6	7.7	9.1	8.3
36.0								6.1	7.5	8.5	6.7	8.0	7.2
38.0									6.6	7.6	5.6	7.1	6.3
40.0											4.5	6.6	5.3
42.0												5.6	4.4
危険角度 (°)	-	-	-	-	-	-	-	18	-	-	20	-	28
伸長状態 (伸長割合%)													
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

C1性能 C/W 40t O/R 9.2m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	200.0	175.0	150.0							
3.5	184.0	175.0	150.0							
4.0	166.4	166.5	141.4	155.0	160.0	153.0	83.0			
4.5	151.6	151.7	134.2	151.2	152.7	146.2	80.7	135.0	152.1	154.0
5.0	139.0	139.1	127.7	138.6	140.2	137.5	75.6	135.0	139.5	141.5
6.0	118.7	118.8	116.6	118.3	119.9	121.5	67.2	117.5	119.3	121.3
7.0	103.1	103.2	105.1	102.6	104.3	105.9	60.4	101.8	103.6	105.8
8.0	90.6	90.8	92.7	90.2	91.9	93.6	54.8	89.3	91.2	93.4
9.0	80.5	80.7	82.6	80.1	81.9	83.5	50.2	79.2	81.1	83.3
10.0	71.3	71.4	73.8	70.7	72.9	74.8	46.5	69.7	72.0	74.6
11.0	63.2	63.3	65.7	62.6	64.8	66.7	43.5	61.6	63.9	68.5
12.0		56.6	58.9	55.9	58.0	60.0	40.5	54.9	57.1	59.7
14.0		46.1	48.4	45.3	47.5	49.4	36.0	44.2	46.6	49.2
16.0		38.3	40.6	37.4	39.6	41.5	32.5	36.3	38.6	41.2
18.0				31.3	33.5	35.4	29.5	30.2	32.5	35.1
20.0				26.1	28.2	30.0	26.5	25.0	27.2	29.6
22.0								20.6	22.8	25.1
24.0								17.2	19.3	21.6
危険角度 (°)	-	-	-	-	-	-	-	-	-	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	7

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム		50.0mブーム
5.0	132.0	135.0	115.0	83.0									
6.0	118.4	120.6	108.4	76.5	115.0	105.0	80.0						
7.0	102.8	105.0	97.5	68.7	104.1	105.0	74.4	100.0	83.0	78.0			
8.0	90.3	92.6	88.5	62.3	91.7	92.7	67.9	91.7	83.0	72.1	83.0	74.0	70.0
9.0	80.2	82.5	81.0	56.9	81.6	82.7	62.4	81.6	80.0	66.6	82.5	70.0	70.0
10.0	70.9	73.7	74.4	52.4	72.6	73.8	57.7	72.6	73.9	61.8	73.6	65.2	70.0
11.0	62.8	65.5	66.2	48.5	64.5	65.7	53.6	64.5	66.6	57.6	65.5	61.0	64.2
12.0	56.1	58.8	59.5	45.1	57.7	58.9	50.0	57.8	59.8	53.9	58.7	57.5	59.7
14.0	45.5	48.2	48.8	39.4	47.1	48.3	44.1	47.1	49.2	47.8	48.1	50.0	49.1
16.0	37.5	40.2	40.9	34.7	39.1	40.3	39.3	39.2	41.2	42.6	40.1	42.0	41.1
18.0	31.4	34.1	34.7	31.0	33.0	34.2	35.4	33.0	35.0	36.4	33.9	35.8	34.9
20.0	26.1	28.6	29.2	27.9	27.6	28.7	31.3	27.6	29.4	30.7	28.4	30.2	29.2
22.0	21.7	24.1	24.6	25.3	23.1	24.1	26.7	23.1	24.8	26.1	23.9	25.6	24.6
24.0	18.2	20.6	21.1	22.9	19.5	20.6	23.0	19.5	21.2	22.4	20.3	21.9	21.0
26.0	15.4	17.7	18.2	20.0	16.6	17.7	20.1	16.6	18.3	19.5	17.4	19.0	18.0
28.0	13.1	15.4	15.8	17.6	14.3	15.3	17.6	14.3	15.9	17.0	14.9	16.5	15.6
30.0					12.3	13.3	15.6	12.3	13.8	15.0	12.9	14.5	13.6
32.0					10.6	11.6	13.9	10.6	12.1	13.3	11.2	12.7	11.8
34.0					9.3	10.3	12.5	9.1	10.6	11.8	9.7	11.3	10.3
36.0								7.7	9.4	10.5	8.4	10.0	9.1
38.0								6.4	8.3	9.4	7.0	8.8	7.9
40.0											5.8	7.9	6.7
42.0											4.8	6.9	5.6
44.0													4.7
危険角度 (°)	-	-	-	-	-	-	-	-	-	-	-	-	22
伸長状態 (伸長割合%)													
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

C2性能 C/W 40t O/R 8.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	200.0	175.0	150.0							
3.5	184.0	175.0	150.0							
4.0	166.4	166.5	141.4	155.0	160.0	153.0	83.0			
4.5	151.6	151.7	134.2	151.2	152.7	146.2	80.7	135.0	152.1	154.0
5.0	139.0	139.1	127.7	138.6	140.2	137.5	75.6	135.0	139.5	141.5
6.0	118.7	118.8	116.6	118.3	119.9	121.5	67.2	117.5	119.3	121.3
7.0	103.1	103.2	105.1	102.6	104.3	105.9	60.4	101.8	103.6	105.8
8.0	90.6	90.8	92.7	90.2	91.9	93.6	54.8	89.3	91.2	93.4
9.0	80.5	80.7	82.6	80.1	81.9	83.5	50.2	79.2	81.1	83.3
10.0	71.3	71.4	73.8	70.7	72.9	74.8	46.5	69.7	72.0	74.6
11.0	63.2	63.3	65.7	62.6	64.8	66.7	43.5	61.6	63.9	68.5
12.0		56.6	58.9	55.9	58.0	60.0	40.5	54.9	57.1	59.7
14.0		45.2	47.6	44.4	46.7	48.6	36.0	43.4	45.8	48.4
16.0		35.6	37.8	34.7	36.9	38.7	32.5	33.7	36.0	38.5
18.0				27.9	30.0	31.7	29.5	26.9	29.0	31.5
20.0				22.8	24.9	26.6	26.5	21.7	23.9	26.2
22.0								17.8	19.9	22.2
24.0								14.7	16.8	19.1
危険角度 (°)	-	-	-	-	-	-	-	-	-	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム	50.0mブーム
5.0	132.0	135.0	115.0	83.0								
6.0	118.4	120.6	108.4	76.5	115.0	105.0	80.0					
7.0	102.8	105.0	97.5	68.7	104.1	105.0	74.4	100.0	83.0	78.0		
8.0	90.3	92.6	88.5	62.3	91.7	92.7	67.9	91.7	83.0	72.1	83.0	74.0
9.0	80.2	82.5	81.0	56.9	81.6	82.7	62.4	81.6	80.0	66.6	82.5	70.0
10.0	70.9	73.7	74.4	52.4	72.6	73.8	57.7	72.6	73.9	61.8	73.6	65.2
11.0	62.8	65.5	66.2	48.5	64.5	65.7	53.6	64.5	66.6	57.6	65.5	61.0
12.0	56.1	58.8	59.5	45.1	57.7	58.9	50.0	57.8	59.8	53.9	58.7	57.5
14.0	44.7	47.4	48.1	39.4	46.3	47.5	44.1	46.4	48.4	47.8	47.3	49.2
16.0	34.9	37.5	38.1	34.7	36.5	37.6	39.3	36.5	38.4	39.8	37.4	39.2
18.0	28.0	30.5	31.1	31.0	29.5	30.6	33.2	29.5	31.3	32.6	30.4	32.1
20.0	22.8	25.3	25.8	27.8	24.3	25.3	27.9	24.3	26.1	27.3	25.1	26.8
22.0	18.9	21.3	21.8	23.7	20.2	21.3	23.8	20.3	22.0	23.2	21.0	22.7
24.0	15.7	18.1	18.6	20.4	17.0	18.1	20.5	17.1	18.7	19.9	17.8	19.4
26.0	13.2	15.5	16.0	17.8	14.4	15.5	17.8	14.4	16.1	17.2	15.2	16.7
28.0	11.1	13.4	13.8	15.6	12.3	13.3	15.6	12.3	13.9	15.0	13.0	14.5
30.0					10.5	11.5	13.8	10.5	12.0	13.2	11.1	12.7
32.0					9.0	10.0	12.2	8.9	10.5	11.6	9.6	11.1
34.0					7.5	8.8	10.9	7.3	9.1	10.2	8.1	9.7
36.0								6.0	7.9	9.1	6.7	8.5
38.0									6.8	8.1	5.4	7.5
40.0											4.4	6.4
42.0												5.5
危険角度 (°)	-	-	-	-	-	-	-	18	-	-	20	-
伸長状態 (伸長割合%)												
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

C3性能 C/W 40t O/R 7.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	200.0	175.0	150.0							
3.5	184.0	175.0	150.0							
4.0	166.4	166.5	141.4	155.0	160.0	153.0	83.0			
4.5	151.6	151.7	134.2	151.2	152.7	146.2	80.7	135.0	152.1	154.0
5.0	139.0	139.1	127.7	138.6	140.2	137.5	75.6	135.0	139.5	141.5
6.0	118.7	118.8	116.6	118.3	119.9	121.5	67.2	117.5	119.3	121.3
7.0	103.1	103.2	105.1	102.6	104.3	105.9	60.4	101.8	103.6	105.8
8.0	90.6	90.8	92.7	90.2	91.9	93.6	54.8	89.3	91.2	93.4
9.0	79.8	80.0	82.6	79.2	81.6	83.5	50.2	78.1	80.7	83.3
10.0	65.3	65.4	67.9	64.7	67.0	69.0	46.5	63.6	66.0	68.8
11.0	54.7	54.8	57.2	54.1	56.3	58.3	43.5	53.1	55.4	58.0
12.0		46.8	49.1	46.1	48.2	50.1	40.5	45.1	47.4	49.9
14.0		35.5	37.6	34.8	36.8	38.5	36.0	33.9	36.0	38.3
16.0		28.0	30.0	27.2	29.1	30.8	30.9	26.3	28.3	30.5
18.0				21.7	23.6	25.2	25.4	20.8	22.8	25.0
20.0				17.7	19.6	21.1	21.2	16.7	18.7	20.8
22.0								13.6	15.5	17.6
24.0								11.0	13.0	15.0
危険角度 (°)	-	-	-	-	-	-	-	-	-	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム		50.0mブーム
5.0	132.0	135.0	115.0	83.0									
6.0	118.4	120.6	108.4	76.5	115.0	105.0	80.0						
7.0	102.8	105.0	97.5	68.7	104.1	105.0	74.4	100.0	83.0	78.0			
8.0	90.3	92.6	88.5	62.3	91.7	92.7	67.9	91.7	83.0	72.1	83.0	74.0	70.0
9.0	79.5	82.5	81.0	56.9	81.4	82.7	62.4	81.4	80.0	66.6	81.6	70.0	70.0
10.0	64.9	67.8	68.5	52.4	66.7	67.9	57.7	66.7	68.9	61.8	67.8	65.2	68.6
11.0	54.4	57.1	57.8	48.5	56.0	57.2	53.6	56.1	58.1	57.6	57.0	58.9	57.8
12.0	46.3	48.9	49.6	45.1	47.9	49.1	50.0	48.0	49.9	51.3	48.9	50.7	49.7
14.0	35.0	37.4	38.0	39.4	36.5	37.5	40.2	36.5	38.3	39.6	37.4	39.1	38.1
16.0	27.3	29.7	30.2	32.1	28.7	29.8	32.3	28.8	30.5	31.7	29.6	31.2	30.3
18.0	21.8	24.1	24.6	26.4	23.2	24.2	26.6	23.2	24.9	26.0	24.0	25.5	24.7
20.0	17.7	19.9	20.4	22.2	19.0	20.0	22.3	19.0	20.6	21.7	19.8	21.3	20.4
22.0	14.5	16.7	17.1	18.9	15.7	16.7	19.0	15.8	17.3	18.4	16.5	18.0	17.1
24.0	11.9	14.1	14.5	16.2	13.1	14.1	16.3	13.2	14.7	15.7	13.8	15.3	14.5
26.0	9.9	12.0	12.4	14.0	11.0	11.9	14.1	11.0	12.5	13.6	11.7	13.1	12.3
28.0	8.2	10.3	10.7	12.3	9.3	10.2	12.3	9.3	10.7	11.8	9.9	11.3	10.5
30.0					7.8	8.7	10.8	7.8	9.2	10.2	8.4	9.8	8.9
32.0					6.6	7.5	9.5	6.5	7.9	8.9	7.1	8.5	7.6
34.0						6.5	8.4		6.8	7.8	5.9	7.3	6.5
36.0									5.8	6.8	4.6	6.4	5.5
38.0									4.8	6.0		5.5	4.3
40.0												4.6	
危険角度 (°)	-	-	-	-	15	-	-	33	-	-	33	20	37
伸長状態 (伸長割合%)													
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

C4性能 C/W 40t O/R 6.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	200.0	175.0	150.0							
3.5	184.0	175.0	150.0							
4.0	166.4	166.5	141.4	155.0	160.0	153.0	83.0			
4.5	151.6	151.7	134.2	151.2	152.7	146.2	80.7	135.0	152.1	154.0
5.0	139.0	139.1	127.7	138.6	140.2	137.5	75.6	135.0	139.5	141.5
6.0	118.7	118.8	116.6	118.3	119.9	121.5	67.2	117.5	119.3	121.3
7.0	103.1	103.2	105.1	102.6	104.3	105.9	60.4	101.8	103.6	105.8
8.0	80.6	80.8	83.4	80.0	82.4	84.6	54.8	78.9	81.5	84.4
9.0	64.6	64.8	67.3	64.1	66.3	68.4	50.2	63.1	65.4	68.1
10.0	53.4	53.5	55.8	52.9	55.0	56.9	46.5	51.9	54.1	56.7
11.0	45.1	45.2	47.4	44.5	46.5	48.4	43.5	43.6	45.7	48.2
12.0		38.7	40.8	38.0	40.0	41.8	40.5	37.1	39.2	41.6
14.0		29.4	31.4	28.7	30.6	32.3	32.4	27.9	29.9	32.1
16.0		23.1	25.0	22.4	24.2	25.8	25.9	21.5	23.4	25.6
18.0				17.8	19.6	21.1	21.3	16.9	18.8	20.9
20.0				14.3	16.1	17.6	17.8	13.4	15.2	17.3
22.0								10.6	12.5	14.5
24.0								8.5	10.3	12.4
危険角度 (°)	-	-	-	-	-	-	-	-	-	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム	50.0mブーム
5.0	132.0	135.0	115.0	83.0								
6.0	118.4	120.6	108.4	76.5	115.0	105.0	80.0					
7.0	102.8	105.0	97.5	68.7	102.5	104.4	74.4	97.6	83.0	78.0		
8.0	80.3	83.3	84.1	62.3	82.2	83.5	67.9	81.2	83.0	72.1	79.3	74.0
9.0	64.3	67.2	67.9	56.9	66.1	67.3	62.4	66.1	68.3	66.6	67.1	69.1
10.0	53.1	55.7	56.4	52.4	54.7	55.9	57.7	54.7	56.8	58.1	55.7	57.6
11.0	44.7	47.3	47.9	48.5	46.3	47.4	50.2	46.3	48.2	49.5	47.2	49.0
12.0	38.3	40.7	41.3	43.3	39.7	40.8	43.5	39.8	41.6	42.9	40.7	42.4
14.0	28.9	31.3	31.8	33.7	30.3	31.4	33.9	30.4	32.1	33.3	31.2	32.8
16.0	22.5	24.8	25.3	27.1	23.9	24.9	27.3	23.9	25.6	26.7	24.7	26.2
18.0	17.9	20.0	20.6	22.3	19.1	20.1	22.4	19.2	20.8	21.9	19.9	21.4
20.0	14.3	16.5	17.0	18.7	15.6	16.5	18.8	15.6	17.2	18.2	16.3	17.8
22.0	11.6	13.7	14.1	15.8	12.8	13.7	15.9	12.8	14.3	15.4	13.5	14.9
24.0	9.4	11.4	11.9	13.5	10.5	11.4	13.6	10.5	12.0	13.1	11.2	12.6
26.0	7.5	9.6	10.0	11.6	8.7	9.6	11.7	8.7	10.1	11.2	9.3	10.7
28.0	5.8	8.1	8.5	10.1	7.1	8.0	10.1	7.1	8.6	9.6	7.7	9.1
30.0					5.7	6.8	8.8	5.7	7.2	8.2	6.4	7.8
32.0						5.6	7.7		6.1	7.1	5.0	6.6
34.0							6.7		4.9	6.1		5.7
36.0										5.3		4.6
38.0										4.4		
危険角度 (°)	15	-	-	-	27	15	-	39	27	-	42	33
伸長状態 (伸長割合%)												
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

C5性能 C/W 40t O/R 5.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	200.0	175.0	150.0							
3.5	184.0	175.0	150.0							
4.0	166.4	166.5	141.4	155.0	160.0	153.0	83.0			
4.5	151.6	151.7	134.2	151.2	152.7	146.2	80.7	135.0	152.1	154.0
5.0	139.0	139.1	127.7	138.6	140.2	137.5	75.6	135.0	139.5	141.5
6.0	103.1	103.4	106.1	102.6	105.0	107.3	67.2	101.4	104.0	107.0
7.0	76.5	76.7	79.1	76.0	78.2	80.2	60.4	75.0	77.3	80.0
8.0	59.9	60.1	62.3	59.5	61.5	63.4	54.8	58.5	60.7	63.2
9.0	48.6	48.8	50.9	48.2	50.1	51.9	50.2	47.3	49.3	51.7
10.0	40.5	40.6	42.6	40.0	41.8	43.5	43.7	39.1	41.1	43.3
11.0	34.3	34.4	36.3	33.8	35.6	37.2	37.3	32.9	34.8	37.0
12.0		29.5	31.4	28.9	30.7	32.2	32.4	28.1	29.9	32.0
14.0		22.4	24.2	21.8	23.5	25.0	25.1	21.0	22.8	24.8
16.0		17.5	19.2	16.8	18.5	19.9	20.0	16.0	17.8	19.7
18.0				13.2	14.8	16.2	16.3	12.4	14.1	16.0
20.0				10.4	12.1	13.4	13.6	9.6	11.3	13.2
22.0								7.4	9.1	10.9
24.0									7.4	9.2
危険角度 (°)	-	-	-	-	-	-	-	25	-	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム		50.0mブーム
5.0	132.0	135.0	115.0	83.0									
6.0	102.8	106.0	106.8	76.5	101.4	103.3	80.0						
7.0	76.2	79.0	79.8	68.7	78.0	79.2	74.4	78.0	80.2	78.0			
8.0	59.7	62.3	62.9	62.3	61.3	62.4	65.2	61.3	63.3	64.6	62.3	64.0	63.0
9.0	48.4	50.8	51.4	53.4	49.9	51.0	53.6	49.9	51.8	53.0	50.8	52.5	51.5
10.0	40.2	42.5	43.1	45.0	41.6	42.6	45.2	41.6	43.4	44.6	42.5	44.1	43.2
11.0	34.0	36.2	36.8	38.6	35.3	36.3	38.8	35.4	37.1	38.2	36.2	37.7	36.8
12.0	29.1	31.3	31.8	33.6	30.4	31.4	33.7	30.4	32.1	33.2	31.2	32.7	31.9
14.0	21.9	24.0	24.5	26.2	23.2	24.1	26.4	23.2	24.8	25.8	23.9	25.4	24.6
16.0	16.9	19.0	19.4	21.1	18.1	19.0	21.2	18.2	19.7	20.7	18.9	20.3	19.5
18.0	13.3	15.2	15.7	17.3	14.4	15.3	17.4	14.5	15.9	16.9	15.1	16.5	15.7
20.0	10.4	12.4	12.8	14.4	11.6	12.4	14.5	11.6	13.0	14.0	12.2	13.6	12.8
22.0	8.2	10.1	10.6	12.1	9.3	10.2	12.2	9.3	10.7	11.7	10.0	11.3	10.5
24.0	6.4	8.3	8.8	10.2	7.5	8.4	10.3	7.5	8.9	9.8	8.1	9.4	8.7
26.0		6.9	7.3	8.7	6.0	6.9	8.8	6.0	7.4	8.3	6.6	7.9	7.2
28.0		5.7	6.0	7.5		5.6	7.5		6.1	7.0	5.3	6.6	5.9
30.0							6.4		5.0	5.9	4.0	5.5	4.8
32.0							5.5			5.0		4.6	
34.0							4.8			4.2			
危険角度 (°)	35	15	15	-	39	34	-	48	39	27	46	42	51
伸長状態 (伸長割合%)													
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

D1性能 C/W 25t O/R 9.2m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	195.7	175.0	150.0							
3.5	175.3	175.0	150.0							
4.0	158.4	158.5	141.4	155.0	159.5	153.0	83.0			
4.5	144.3	144.4	134.2	143.9	145.4	146.2	80.7	135.0	144.8	146.7
5.0	132.2	132.3	127.7	131.8	133.4	134.9	75.6	131.0	132.7	134.7
6.0	112.8	112.9	114.8	112.4	114.0	115.6	67.2	111.6	113.4	115.4
7.0	97.8	97.9	99.9	97.4	99.1	100.7	60.4	96.6	98.4	100.5
8.0	84.6	84.8	87.2	84.1	86.3	88.2	54.8	83.1	85.4	88.0
9.0	73.2	73.4	75.8	72.7	74.8	76.8	50.2	71.7	74.0	76.6
10.0	64.1	64.3	66.6	63.6	65.7	67.7	46.5	62.6	64.9	67.5
11.0	56.7	56.8	59.2	56.1	58.3	60.2	43.5	55.1	57.4	60.0
12.0		50.6	53.0	49.9	52.1	54.0	40.5	48.9	51.2	53.8
14.0		41.0	43.3	40.1	42.4	44.3	36.0	39.0	41.4	44.1
16.0		31.7	34.0	30.8	33.0	35.0	32.5	29.8	32.1	34.7
18.0				24.3	26.5	28.3	28.5	23.3	25.5	28.0
20.0				19.6	21.7	23.5	23.6	18.5	20.7	23.1
22.0								14.9	17.0	19.4
24.0								12.0	14.2	16.5
危険角度 (°)	-	-	-	-	-	-	-	-	-	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム		50.0mブーム
5.0	131.9	134.0	115.0	83.0									
6.0	112.5	114.7	108.4	76.5	113.8	105.0	80.0						
7.0	97.5	99.8	97.5	68.7	98.9	99.9	74.4	98.9	83.0	78.0			
8.0	84.3	87.1	87.8	62.3	86.0	87.2	67.9	86.0	83.0	72.1	83.0	74.0	70.0
9.0	72.9	75.6	76.4	56.9	74.6	75.8	62.4	74.6	76.7	66.6	75.6	70.0	70.0
10.0	63.8	66.5	67.2	52.4	65.5	66.7	57.7	65.5	67.6	61.8	66.5	65.2	67.5
11.0	56.3	59.0	59.7	48.5	58.0	59.2	53.6	58.0	60.1	57.6	59.0	60.9	60.0
12.0	50.1	52.8	53.5	45.1	51.8	53.0	50.0	51.8	53.9	53.9	52.8	54.7	53.8
14.0	40.3	43.1	43.7	39.4	42.0	43.2	44.1	42.0	44.1	45.4	43.0	44.9	44.0
16.0	31.0	33.7	34.3	34.7	32.6	33.8	36.7	32.6	34.7	36.0	33.6	35.5	34.4
18.0	24.5	27.0	27.6	29.7	26.0	27.1	29.9	26.0	27.9	29.2	26.9	28.7	27.7
20.0	19.6	22.1	22.7	24.7	21.1	22.2	24.8	21.1	22.9	24.2	22.0	23.7	22.7
22.0	15.9	18.4	18.9	20.8	17.3	18.4	21.0	17.4	19.1	20.4	18.2	19.8	18.9
24.0	13.0	15.4	15.9	17.8	14.4	15.4	17.9	14.4	16.1	17.3	15.1	16.8	15.8
26.0	10.7	13.0	13.5	15.4	12.0	13.0	15.4	12.0	13.6	14.8	12.7	14.3	13.4
28.0	8.6	11.1	11.6	13.4	10.0	11.0	13.4	10.0	11.6	12.8	10.7	12.3	11.4
30.0					8.2	9.4	11.7	8.2	9.9	11.1	9.0	10.6	9.7
32.0					6.5	7.9	10.3	6.5	8.5	9.6	7.3	9.1	8.2
34.0						6.6	9.1		7.1	8.4	5.8	7.9	6.7
36.0									5.8	7.3	4.5	6.6	5.4
38.0									4.7	6.3		5.5	4.3
40.0												4.5	
危険角度 (°)	-	-	-	-	15	-	-	33	-	-	33	20	37
伸長状態 (伸長割合%)													
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

D2性能 C/W 25t O/R 8.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	195.7	175.0	150.0							
3.5	175.3	175.0	150.0							
4.0	158.4	158.5	141.4	155.0	159.5	153.0	83.0			
4.5	144.3	144.4	134.2	143.9	145.4	146.2	80.7	135.0	144.8	146.7
5.0	132.2	132.3	127.7	131.8	133.4	134.9	75.6	131.0	132.7	134.7
6.0	112.8	112.9	114.8	112.4	114.0	115.6	67.2	111.6	113.4	115.4
7.0	97.8	97.9	99.9	97.4	99.1	100.7	60.4	96.6	98.4	100.5
8.0	84.6	84.8	87.2	84.1	86.3	88.2	54.8	83.1	85.4	88.0
9.0	73.2	73.4	75.8	72.7	74.8	76.8	50.2	71.7	74.0	76.6
10.0	64.1	64.3	66.6	63.6	65.7	67.7	46.5	62.6	64.9	67.5
11.0	56.5	56.6	59.2	55.8	58.3	60.2	43.5	54.6	57.3	60.0
12.0		47.8	50.3	47.0	49.3	51.5	40.5	45.8	48.4	51.2
14.0		35.5	37.9	34.7	36.9	38.9	36.0	33.7	36.0	38.7
16.0		27.5	29.7	26.7	28.8	30.6	30.8	25.6	27.9	30.4
18.0				21.0	23.0	24.8	25.0	19.9	22.1	24.5
20.0				16.8	18.9	20.6	20.7	15.7	17.8	20.2
22.0								12.5	14.6	16.9
24.0								9.7	12.0	14.3
危険角度 (°)	-	-	-	-	-	-	-	-	-	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	7

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム		50.0mブーム
5.0	131.9	134.0	115.0	83.0									
6.0	112.5	114.7	108.4	76.5	113.8	105.0	80.0						
7.0	97.5	99.8	97.5	68.7	98.9	99.9	74.4	98.9	83.0	78.0			
8.0	84.3	87.1	87.8	62.3	86.0	87.2	67.9	86.0	83.0	72.1	83.0	74.0	70.0
9.0	72.9	75.6	76.4	56.9	74.6	75.8	62.4	74.6	76.7	66.6	75.6	70.0	70.0
10.0	63.8	66.5	67.2	52.4	65.5	66.7	57.7	65.5	67.6	61.8	66.5	65.2	65.9
11.0	56.1	59.0	59.7	48.5	58.0	59.2	53.6	58.0	60.1	57.6	58.2	60.9	57.4
12.0	47.2	50.2	50.9	45.1	49.0	50.3	50.0	49.0	51.3	52.8	50.1	52.2	50.5
14.0	34.9	37.7	38.3	39.4	36.6	37.8	40.8	36.6	38.7	40.1	37.6	39.5	38.4
16.0	26.8	29.4	30.0	32.1	28.4	29.5	32.3	28.4	30.3	31.7	29.3	31.1	30.1
18.0	21.1	23.6	24.2	26.2	22.5	23.7	26.3	22.6	24.4	25.7	23.4	25.2	24.2
20.0	16.8	19.2	19.8	21.7	18.2	19.3	21.9	18.3	20.0	21.3	19.1	20.7	19.8
22.0	13.5	15.9	16.4	18.3	14.9	15.9	18.4	14.9	16.6	17.8	15.7	17.3	16.4
24.0	10.9	13.2	13.7	15.6	12.2	13.3	15.7	12.2	13.9	15.1	13.0	14.6	13.7
26.0	8.6	11.1	11.6	13.4	10.1	11.1	13.5	10.1	11.7	12.9	10.8	12.4	11.5
28.0	6.5	9.4	9.8	11.6	8.1	9.3	11.6	8.1	9.9	11.0	9.0	10.5	9.6
30.0					6.3	7.7	10.1	6.3	8.3	9.5	7.2	9.0	8.1
32.0						6.2	8.8		6.8	8.2	5.6	7.7	6.5
34.0							7.7		5.5	7.0	4.2	6.3	5.1
36.0									4.3	5.8		5.1	
38.0										4.8		4.1	
危険角度 (°)	15	-	-	-	27	15	-	39	18	-	37	29	44
伸長状態 (伸長割合%)													
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

D3性能 C/W 25t O/R 7.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	195.7	175.0	150.0							
3.5	175.3	175.0	150.0							
4.0	158.4	158.5	141.4	155.0	159.5	153.0	83.0			
4.5	144.3	144.4	134.2	143.9	145.4	146.2	80.7	135.0	144.8	146.7
5.0	132.2	132.3	127.7	131.8	133.4	134.9	75.6	131.0	132.7	134.7
6.0	112.8	112.9	114.8	112.4	114.0	115.6	67.2	111.6	113.4	115.4
7.0	97.8	97.9	99.9	97.4	99.1	100.7	60.4	96.6	98.4	100.5
8.0	81.6	81.8	84.7	80.9	83.6	86.1	54.8	79.7	82.5	85.8
9.0	63.9	64.1	66.8	63.3	65.8	68.0	50.2	62.2	64.8	67.8
10.0	51.9	52.1	54.5	51.3	53.6	55.7	46.5	50.3	52.7	55.4
11.0	43.2	43.3	45.7	42.6	44.8	46.7	43.5	41.6	43.9	46.5
12.0		36.7	38.9	36.0	38.1	39.9	40.1	35.0	37.2	39.7
14.0		27.3	29.4	26.6	28.6	30.4	30.5	25.7	27.8	30.1
16.0		21.1	23.1	20.4	22.3	23.9	24.1	19.4	21.4	23.7
18.0				15.9	17.7	19.3	19.5	14.9	16.9	19.1
20.0				12.5	14.4	15.0	16.1	11.6	13.5	15.6
22.0								9.0	10.9	13.0
24.0								6.7	8.8	10.9
危険角度 (°)	-	-	-	-	-	-	-	-	-	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム	50.0mブーム
5.0	131.9	134.0	115.0	83.0								
6.0	112.5	114.7	108.4	76.5	113.8	105.0	80.0					
7.0	97.5	99.8	97.5	68.7	98.9	99.9	74.4	96.6	83.0	78.0		
8.0	81.2	84.6	85.5	62.3	82.8	84.8	67.9	79.1	82.3	72.1	77.0	74.0
9.0	63.6	66.7	67.5	56.9	65.5	66.9	62.4	65.5	67.9	66.6	65.0	67.8
10.0	51.6	54.4	55.2	52.4	53.3	54.6	57.7	53.4	55.5	57.0	54.4	56.4
11.0	42.8	45.5	46.2	48.5	44.5	45.7	48.6	44.5	46.6	48.0	45.5	47.4
12.0	36.2	38.8	39.4	41.6	37.8	38.9	41.8	37.8	39.8	41.1	38.8	40.6
14.0	26.8	29.3	29.9	31.8	28.3	29.4	32.0	28.3	30.2	31.4	29.2	30.9
16.0	20.5	22.8	23.4	25.3	21.9	22.9	25.4	21.9	23.7	24.8	22.7	24.4
18.0	16.0	18.2	18.7	20.6	17.3	18.3	20.7	17.3	19.0	20.1	18.1	19.7
20.0	12.6	14.8	15.3	17.0	13.8	14.8	17.1	13.9	15.5	16.6	14.6	16.1
22.0	9.9	12.1	12.5	14.3	11.1	12.1	14.4	11.2	12.7	13.8	11.9	13.4
24.0	7.8	9.9	10.4	12.1	9.0	9.9	12.1	9.0	10.5	11.6	9.7	11.2
26.0	5.8	8.2	8.6	10.3	7.2	8.2	10.3	7.3	8.7	9.8	7.9	9.3
28.0		6.8	7.2	8.8	5.6	6.7	8.8	5.6	7.2	8.3	6.4	7.8
30.0							7.6		6.0	7.0	4.9	6.6
32.0							6.5		4.7	5.9		5.5
34.0							5.7			5.0		4.3
36.0										4.0		
危険角度 (°)	25	-	-	-	34	34	-	44	33	18	46	37
伸長状態 (伸長割合%)												
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

D4性能 C/W 25t O/R 6.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	195.7	175.0	150.0							
3.5	175.3	175.0	150.0							
4.0	158.4	158.5	141.4	155.0	159.5	153.0	83.0			
4.5	144.3	144.4	134.2	143.9	145.4	146.2	80.7	135.0	144.8	146.7
5.0	132.2	132.3	127.7	131.8	133.4	134.9	75.6	131.0	132.7	134.7
6.0	112.8	112.9	114.8	112.4	114.0	115.6	67.2	111.1	113.4	115.4
7.0	84.1	84.4	87.3	83.5	86.2	88.6	60.4	82.3	85.1	88.3
8.0	64.1	64.3	66.9	63.5	65.9	68.1	54.8	62.4	65.0	67.9
9.0	51.0	51.2	53.6	50.4	52.7	54.7	50.2	49.4	51.8	54.5
10.0	41.7	41.9	44.2	41.2	43.3	45.2	45.4	40.2	42.5	45.0
11.0	34.9	35.0	37.2	34.3	36.4	38.2	38.4	33.4	35.5	38.0
12.0		29.7	31.8	29.0	31.0	32.8	32.9	28.1	30.2	32.6
14.0		22.1	24.1	21.4	23.3	25.0	25.1	20.5	22.5	24.5
16.0		16.9	18.8	16.2	18.0	19.6	19.8	15.3	17.2	19.4
18.0				12.4	14.2	15.8	15.9	11.5	13.4	15.5
20.0				9.6	11.4	12.9	13.0	8.7	10.5	12.6
22.0								6.1	8.3	10.3
24.0									6.5	8.6
危険角度 (°)	-	-	-	-	-	-	-	25	-	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム		50.0mブーム
5.0	131.9	134.0	115.0	83.0									
6.0	106.0	110.7	108.4	76.5	102.2	104.3	80.0						
7.0	83.2	87.2	88.1	68.7	81.4	83.3	74.4	77.4	80.6	78.0			
8.0	63.8	66.8	67.6	62.3	65.6	67.0	67.9	63.9	66.9	68.9	62.5	65.3	61.1
9.0	50.7	53.5	54.2	56.5	52.4	53.7	56.7	52.4	54.6	56.0	53.0	55.4	52.1
10.0	41.4	44.1	44.8	46.9	43.0	44.2	47.1	43.1	45.1	46.5	44.1	45.9	44.9
11.0	34.6	37.1	37.7	39.8	36.1	37.2	40.0	36.1	38.1	39.4	37.1	38.8	37.8
12.0	29.2	31.7	32.3	34.3	30.7	31.8	34.5	30.8	32.6	33.9	31.6	33.4	32.4
14.0	21.6	23.9	24.5	26.4	23.0	24.0	26.5	23.0	24.8	26.0	23.8	25.5	24.5
16.0	16.3	18.6	19.1	20.9	17.7	18.7	21.1	17.7	19.4	20.5	18.5	20.0	19.1
18.0	12.5	14.7	15.2	16.9	13.8	14.8	17.1	13.8	15.4	16.5	14.6	16.1	15.2
20.0	9.6	11.8	12.2	13.9	10.9	11.8	14.1	10.9	12.4	13.5	11.6	13.1	12.2
22.0	7.3	9.5	9.9	11.6	8.5	9.5	11.7	8.6	10.1	11.2	9.3	10.7	9.9
24.0		7.6	8.1	9.7	6.7	7.6	9.8	6.7	8.2	9.3	7.4	8.8	8.0
26.0		6.1	6.6	8.2		6.1	8.2		6.7	7.7	5.7	7.2	6.4
28.0				6.9			6.9		5.2	6.4	4.1	5.9	4.9
30.0							5.8			5.3		4.7	
32.0							4.9			4.1			
危険角度 (°)	41	25	25	-	44	39	15	51	44	39	49	46	54
伸長状態 (伸長割合%)													
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

D5性能 C/W 25t O/R 5.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	195.7	175.0	150.0							
3.5	175.3	175.0	150.0							
4.0	158.4	158.5	141.4	155.0	159.5	153.0	83.0			
4.5	144.3	144.4	134.2	143.9	145.4	146.2	80.7	134.0	138.3	143.2
5.0	122.6	122.9	126.2	121.9	124.9	127.7	75.6	113.4	117.4	122.0
6.0	82.0	82.2	85.0	81.4	83.9	86.2	67.2	80.3	82.9	85.9
7.0	60.3	60.5	62.9	59.5	62.0	64.0	60.4	58.8	61.1	63.8
8.0	46.8	47.0	49.2	46.3	48.3	50.2	50.4	45.4	47.5	50.0
9.0	37.6	37.7	39.8	37.1	39.0	40.8	40.9	36.2	38.3	40.6
10.0	30.9	31.0	33.0	30.4	32.3	34.0	34.1	29.6	31.5	33.8
11.0	25.9	26.0	27.9	25.4	27.2	28.8	28.9	24.5	26.4	28.6
12.0		22.0	23.9	21.4	23.2	24.7	24.9	20.6	22.4	24.5
14.0		16.2	18.0	15.6	17.3	18.8	18.9	14.8	16.6	18.6
16.0		12.2	14.0	11.6	13.2	14.7	14.8	10.8	12.5	14.5
18.0				8.6	10.3	11.7	11.8	7.8	9.5	11.4
20.0				6.4	8.0	9.4	9.5		7.2	9.1
22.0										7.3
24.0										5.9
危険角度 (°)	-	-	-	-	-	-	-	43	34	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム		50.0mブーム
5.0	107.2	111.9	113.1	83.0									
6.0	81.7	84.8	85.7	76.5	79.8	81.6	80.0						
7.0	60.0	62.8	63.6	65.9	61.7	63.0	66.1	61.2	63.9	65.4			
8.0	46.5	49.1	49.8	51.9	48.1	49.3	52.1	48.1	50.1	51.5	49.1	50.9	49.0
9.0	37.3	39.7	40.4	42.4	38.8	39.9	42.6	38.8	40.7	41.9	39.7	41.4	40.5
10.0	30.6	33.0	33.5	35.5	32.1	33.1	35.6	32.1	33.9	35.0	32.9	34.6	33.6
11.0	25.6	27.8	28.4	30.2	26.9	27.9	30.4	27.0	28.7	29.8	27.8	29.3	28.4
12.0	21.6	23.8	24.3	26.1	22.9	23.9	26.2	22.9	24.6	25.7	23.7	25.2	24.4
14.0	15.8	17.8	18.4	20.0	17.0	17.9	20.2	17.0	18.6	19.7	17.8	19.2	18.4
16.0	11.7	13.7	14.2	15.8	12.9	13.8	16.0	12.9	14.4	15.5	13.6	15.0	14.2
18.0	8.7	10.7	11.1	12.7	9.9	10.7	12.8	9.9	11.4	12.4	10.6	11.9	11.2
20.0	6.4	8.4	8.8	10.3	7.5	8.4	10.5	7.6	9.0	10.0	8.2	9.6	8.8
22.0		6.5	7.0	8.5	5.7	6.6	8.6	5.7	7.1	8.1	6.4	7.7	6.9
24.0				7.0			7.1		5.6	6.6	4.9	6.2	5.4
26.0				5.7			5.8		4.3	5.3		4.9	4.0
28.0				4.7			4.8			4.3			
危険角度 (°)	47	41	41	-	49	49	34	54	48	44	56	52	57
伸長状態 (伸長割合%)													
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

E1性能 C/W 10t O/R 9.2m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	185.9	175.0	150.0							
3.5	166.4	166.5	150.0							
4.0	150.3	150.4	141.4	149.9	151.5	152.9	83.0			
4.5	136.8	136.9	134.2	136.4	138.0	139.5	80.7	135.0	137.4	139.3
5.0	125.3	125.4	127.2	124.9	126.5	128.1	75.6	124.2	125.9	127.9
6.0	106.7	106.9	108.8	106.3	108.1	109.6	67.2	105.3	107.4	109.4
7.0	88.9	89.1	91.5	88.4	90.6	92.6	60.4	87.4	89.7	92.4
8.0	75.5	75.7	78.1	75.0	77.2	79.2	54.8	74.0	76.3	79.0
9.0	65.1	65.3	67.7	64.6	66.8	68.8	50.2	63.6	65.9	68.6
10.0	56.8	57.0	59.4	56.3	58.5	60.4	46.5	55.3	57.6	60.2
11.0	49.9	50.1	52.6	49.2	51.7	53.6	43.5	47.9	50.8	53.4
12.0		41.6	44.3	40.8	43.3	45.5	40.5	39.6	42.3	45.3
14.0		30.1	32.6	29.3	31.6	33.7	33.9	28.2	30.7	33.4
16.0		22.8	25.1	21.9	24.1	26.0	26.2	20.9	23.2	25.8
18.0				16.8	18.9	20.7	20.9	15.7	18.0	20.4
20.0				13.0	15.1	16.9	17.0	11.9	14.1	16.5
22.0								8.7	11.2	13.6
24.0								5.9	8.9	11.3
危険角度 (°)	-	-	-	-	-	-	-	-	-	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム		50.0mブーム
5.0	125.1	127.2	115.0	83.0									
6.0	106.5	108.7	108.4	76.5	107.9	105.0	80.0						
7.0	88.7	91.4	92.1	68.7	90.4	91.6	74.4	90.4	83.0	78.0			
8.0	75.3	78.0	78.7	62.3	77.0	78.2	67.9	77.0	79.1	72.1	78.0	74.0	70.0
9.0	64.9	67.6	68.3	56.9	66.5	67.8	62.4	66.6	68.7	66.6	67.6	69.5	68.2
10.0	56.6	59.3	60.0	52.4	58.2	59.4	57.7	58.3	60.3	61.7	58.9	61.1	57.9
11.0	49.5	52.5	53.1	48.5	51.4	52.6	53.6	50.9	53.5	54.9	50.4	53.3	49.8
12.0	41.0	44.2	44.9	45.1	42.9	44.3	47.7	43.0	45.3	46.9	43.7	46.3	43.4
14.0	29.5	32.4	33.1	35.4	31.3	32.5	35.6	31.3	33.4	34.9	32.3	34.3	33.2
16.0	22.1	24.8	25.4	27.6	23.7	24.9	27.8	23.7	25.7	27.1	24.7	26.5	25.5
18.0	16.9	19.5	20.1	22.1	18.4	19.6	22.3	18.4	20.3	21.7	19.3	21.1	20.1
20.0	13.0	15.5	16.1	18.1	14.5	15.6	18.2	14.5	16.4	17.6	15.4	17.1	16.1
22.0	10.1	12.5	13.1	15.0	11.5	12.6	15.1	11.5	13.3	14.5	12.3	14.0	13.0
24.0	7.3	10.2	10.7	12.6	9.1	10.2	12.7	9.2	10.9	12.1	9.9	11.6	10.6
26.0		8.3	8.8	10.6	6.8	8.3	10.7	6.9	8.9	10.1	7.8	9.6	8.6
28.0		6.4	7.0	9.0		6.3	9.0		7.1	8.4	5.9	7.9	6.8
30.0							7.7		5.5	7.0	4.2	6.4	5.1
32.0							6.5		4.1	5.6		4.9	
34.0							5.3			4.4			
危険角度 (°)	35	15	-	-	39	34	-	48	33	27	46	42	51
伸長状態 (伸長割合%)													
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

E2性能 C/W 10t O/R 8.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	185.9	175.0	150.0							
3.5	166.4	166.5	150.0							
4.0	150.3	150.4	141.4	149.9	151.5	152.9	83.0			
4.5	136.8	136.9	134.2	136.4	138.0	139.5	80.7	135.0	137.4	139.3
5.0	125.3	125.4	127.2	124.9	126.5	128.1	75.6	124.2	125.9	127.9
6.0	106.7	106.9	108.8	106.3	108.1	109.6	67.2	105.3	107.4	109.4
7.0	88.9	89.1	91.5	88.4	90.6	92.6	60.4	87.4	89.7	92.4
8.0	75.5	75.7	78.1	75.0	77.2	79.2	54.8	74.0	76.3	79.0
9.0	65.0	65.2	67.7	64.3	66.8	68.8	50.2	62.9	65.9	68.6
10.0	51.6	51.8	54.7	50.9	53.6	56.0	46.5	49.7	52.5	55.7
11.0	42.2	42.3	45.0	41.5	44.0	46.2	43.5	40.3	43.0	46.0
12.0		35.3	37.8	34.5	36.9	39.0	39.2	33.4	35.9	38.8
14.0		25.6	27.9	24.8	27.0	29.0	29.1	23.7	26.1	28.7
16.0		19.3	21.5	18.4	20.5	22.4	22.6	17.4	19.6	22.1
18.0				13.9	16.0	17.8	17.9	12.9	15.1	17.5
20.0				10.6	12.7	14.4	14.5	9.3	11.7	14.0
22.0								6.2	9.1	11.4
24.0									6.6	9.4
危険角度 (°)	-	-	-	-	-	-	-	25	-	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム	50.0mブーム
5.0	125.1	127.2	115.0	83.0								
6.0	106.5	108.7	108.4	76.5	107.9	105.0	80.0					
7.0	88.7	91.4	92.1	68.7	90.4	91.6	74.4	90.4	83.0	78.0		
8.0	75.3	78.0	78.7	62.3	77.0	78.2	67.9	73.6	77.1	72.1	71.6	69.6
9.0	63.9	67.6	68.3	56.9	63.4	65.4	62.4	60.6	63.9	66.2	59.5	58.3
10.0	51.2	54.5	55.4	52.4	53.1	54.7	57.7	50.9	54.1	56.2	50.3	49.6
11.0	41.8	44.9	45.7	48.2	43.6	45.0	48.4	43.4	46.1	47.7	43.1	42.8
12.0	34.7	37.7	38.4	40.9	36.5	37.8	41.1	36.6	38.8	40.3	37.4	37.2
14.0	25.0	27.7	28.4	30.6	26.6	27.9	30.8	26.7	28.4	30.1	27.7	28.5
16.0	18.6	21.2	21.8	23.9	20.1	21.3	24.1	20.2	22.1	23.4	21.1	21.8
18.0	14.0	16.5	17.1	19.1	15.5	16.6	19.3	15.5	17.4	18.7	16.4	17.1
20.0	10.6	13.1	13.6	15.6	12.1	13.1	15.7	12.1	13.9	15.1	12.9	13.6
22.0	7.6	10.4	11.0	12.8	9.4	10.5	13.0	9.4	11.2	12.4	10.2	10.9
24.0		8.3	8.8	10.7	6.9	8.3	10.8	7.0	9.0	10.2	8.0	8.7
26.0		6.3	6.9	8.9		6.2	9.0		7.1	8.4	5.8	6.8
28.0				7.5			7.5		5.3	6.9	4.1	5.0
30.0							6.2			5.4		4.7
32.0							4.9			4.1		
危険角度 (°)	41	25	25	-	44	39	15	51	44	33	49	54
伸長状態 (伸長割合%)												
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

E3性能 C/W 10t O/R 7.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	185.9	175.0	150.0							
3.5	166.4	166.5	150.0							
4.0	150.3	150.4	141.4	149.9	151.5	152.9	83.0			
4.5	136.8	136.9	134.2	136.4	138.0	139.5	80.7	135.0	137.4	139.3
5.0	125.3	125.4	127.2	124.9	126.5	128.1	75.6	124.2	125.9	127.9
6.0	106.7	106.9	108.8	106.3	108.1	109.6	67.2	105.3	107.4	109.4
7.0	83.9	84.2	87.6	83.2	86.3	89.1	60.4	81.6	85.1	88.8
8.0	61.6	61.8	64.8	61.0	63.7	66.1	54.8	59.7	62.6	65.8
9.0	47.7	47.9	50.6	47.1	49.6	51.8	50.2	46.0	48.6	51.6
10.0	38.3	38.4	40.9	37.7	40.0	42.1	42.2	36.6	39.1	41.8
11.0	31.4	31.6	33.9	30.8	33.0	35.0	35.1	29.8	32.1	34.8
12.0		26.3	28.6	25.6	27.7	29.6	29.8	24.7	26.9	29.4
14.0		19.0	21.1	18.3	20.3	22.0	22.2	17.4	19.5	21.8
16.0		14.1	16.1	13.4	15.3	16.9	17.1	12.5	14.5	16.7
18.0				9.9	11.7	13.3	13.5	8.9	10.9	13.1
20.0				7.3	9.1	10.7	10.8	5.9	8.2	10.4
22.0									6.0	8.3
24.0										6.7
危険角度 (°)	-	-	-	-	-	-	-	34	25	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム		50.0mブーム
5.0	125.1	127.2	115.0	83.0									
6.0	103.1	108.4	108.4	76.5	99.1	101.4	80.0						
7.0	78.7	83.4	84.7	68.7	76.9	79.0	74.4	72.7	76.2	78.0			
8.0	61.3	64.7	65.5	62.3	61.8	63.7	67.9	58.8	62.1	64.3	57.6	60.5	56.2
9.0	47.4	50.5	51.3	53.8	49.3	50.7	54.0	48.7	51.7	53.3	48.1	50.8	47.3
10.0	37.9	40.8	41.5	43.9	39.7	41.0	44.1	39.7	41.9	43.4	40.7	42.8	40.3
11.0	31.1	33.8	34.5	36.7	32.7	33.9	36.9	32.8	34.8	36.2	33.8	35.6	34.6
12.0	25.9	28.5	29.1	31.2	27.4	28.6	31.4	27.5	29.4	30.8	28.4	30.2	29.2
14.0	18.5	20.9	21.5	23.5	20.0	21.0	23.7	20.0	21.8	23.1	20.9	22.6	21.6
16.0	13.5	15.9	16.4	18.3	14.9	16.0	18.5	15.0	16.7	17.9	15.8	17.4	16.5
18.0	10.0	12.2	12.7	14.6	11.3	12.3	14.7	11.3	13.0	14.1	12.1	13.7	12.8
20.0	7.3	9.5	10.0	11.7	8.6	9.6	11.9	8.6	10.2	11.3	9.3	10.9	10.0
22.0		7.4	7.9	9.6	6.5	7.4	9.7	6.5	8.0	9.1	7.2	8.7	7.8
24.0		5.6	6.2	7.8		5.6	7.9		6.3	7.4	5.3	6.9	6.1
26.0				6.4			6.5		4.6	5.9		5.5	4.3
28.0				5.3			5.3			4.6		4.0	
30.0							4.1						
危険角度 (°)	47	35	35	-	49	44	27	54	48	44	56	49	57
伸長状態 (伸長割合%)													
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

E4性能 C/W 10t O/R 6.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	185.9	175.0	150.0							
3.5	166.4	166.5	150.0							
4.0	150.3	150.4	141.4	149.9	151.5	152.9	83.0			
4.5	136.8	136.9	134.2	136.4	138.0	139.5	80.7	135.0	137.4	139.3
5.0	125.3	125.4	127.2	124.9	126.5	128.1	75.6	113.5	118.1	123.4
6.0	89.6	89.9	93.4	88.9	92.0	94.9	67.2	82.0	86.0	90.7
7.0	62.9	63.1	66.0	62.2	64.9	67.4	60.4	61.0	63.8	67.1
8.0	47.3	47.5	50.1	46.7	49.1	51.3	51.5	45.6	48.1	51.0
9.0	37.0	37.2	39.7	36.0	38.7	40.8	40.9	35.5	37.8	40.5
10.0	29.9	30.0	32.3	29.3	31.4	33.4	33.5	28.3	30.6	33.1
11.0	24.5	24.6	26.8	24.0	26.0	27.8	28.0	23.0	25.2	27.6
12.0		20.5	22.6	19.9	21.8	23.6	23.7	18.9	21.0	23.4
14.0		14.6	16.6	13.9	15.8	17.5	17.6	13.0	15.0	17.3
16.0		10.6	12.5	9.9	11.7	13.3	13.4	9.0	10.9	13.1
18.0				6.9	8.8	10.3	10.4	5.6	8.0	10.1
20.0					6.6	8.1	8.2			7.8
22.0										6.0
24.0										6.0
危険角度 (°)	-	-	-	25	-	-	-	43	43	25
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム				40.9mブーム			45.45mブーム		50.0mブーム
5.0	106.4	111.7	113.1	83.0										
6.0	78.4	83.2	84.4	76.5	76.2	78.2	80.0							
7.0	60.8	65.1	66.2	68.7	59.9	61.8	66.5	56.8	60.0	62.1				
8.0	47.0	50.0	50.8	53.3	48.5	50.2	53.5	46.2	49.3	51.3	45.5	48.2	44.6	
9.0	36.8	39.6	40.3	42.6	38.5	39.7	42.8	38.3	40.7	42.1	38.0	40.6	37.6	
10.0	29.5	32.2	32.9	35.1	31.2	32.4	35.3	31.2	33.2	34.6	32.2	34.0	32.0	
11.0	24.2	26.7	27.4	29.5	25.7	26.9	29.6	25.8	27.7	29.0	26.7	28.5	27.5	
12.0	20.1	22.5	23.1	25.1	21.5	22.6	25.3	21.6	23.4	24.7	22.5	24.2	23.2	
14.0	14.1	16.4	17.0	18.9	15.5	16.5	19.0	15.5	17.3	18.5	16.4	18.0	17.1	
16.0	10.0	12.3	12.8	14.6	11.4	12.4	14.8	11.4	13.1	14.2	12.2	13.7	12.8	
18.0	7.1	9.2	9.7	11.5	8.3	9.3	11.6	8.4	10.0	11.1	9.1	10.6	9.8	
20.0		6.9	7.4	9.1	5.9	7.0	9.3	6.0	7.6	8.7	6.8	8.3	7.4	
22.0			5.6	7.3			7.4		5.8	6.9	4.6	6.4		
24.0				5.8			5.9			5.4		4.8		
26.0				4.5			4.6							
危険角度 (°)	52	47	41	25	53	53	39	60	54	51	59	56	61	
伸長状態 (伸長割合%)														
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100	
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100	
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100	
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100	
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t	
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35	
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6	

(単位 : ton)



13.6m — 50.0m

メインブーム

E5性能 C/W 10t O/R 5.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	185.9	175.0	150.0							
3.5	166.4	166.5	150.0							
4.0	150.3	150.4	141.4	136.0	140.6	144.9	83.0			
4.5	120.4	120.7	124.5	110.1	114.2	118.2	80.7	98.3	102.5	107.5
5.0	91.7	92.0	95.3	91.0	94.0	96.8	75.6	82.5	86.5	91.0
6.0	60.5	60.7	63.4	59.9	62.4	64.7	64.9	58.8	61.4	64.4
7.0	43.8	44.0	46.4	43.3	45.4	47.5	47.7	42.2	44.6	47.3
8.0	33.4	33.5	35.8	32.9	34.9	36.8	37.0	32.0	34.1	36.6
9.0	26.3	26.5	28.5	25.8	27.8	29.5	29.7	24.9	27.0	29.3
10.0	21.2	21.3	23.3	20.7	22.5	24.2	24.4	19.8	21.8	24.0
11.0	17.3	17.4	19.3	16.8	18.6	20.2	20.4	16.0	17.9	20.0
12.0		14.4	16.2	13.8	15.5	17.1	17.2	13.0	14.8	16.9
14.0		9.9	11.7	9.3	11.0	12.5	12.6	8.5	10.3	12.3
16.0		6.9	8.6	6.2	7.9	9.3	9.4		7.2	9.1
18.0					5.6	7.0	7.1			6.8
20.0							5.4			
22.0										
危険角度 (°)	-	-	-	35	25	25	-	55	49	43
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム				40.9mブーム			45.45mブーム		50.0mブーム
5.0	78.2	82.8	84.1	83.0										
6.0	58.8	63.0	64.1	66.8	57.7	59.5	64.1							
7.0	43.5	46.3	47.0	49.3	45.2	46.5	49.6	43.4	46.3	48.3				
8.0	33.1	35.7	36.4	38.5	34.7	35.8	38.7	34.7	36.7	38.0	35.0	37.5	34.5	
9.0	26.0	28.5	29.1	31.1	27.5	28.6	31.3	27.6	29.4	30.7	28.5	30.1	29.0	
10.0	20.9	23.2	23.8	25.7	22.3	23.4	25.9	22.4	24.1	25.3	23.2	24.8	23.9	
11.0	17.0	19.2	19.8	21.6	18.4	19.4	21.8	18.4	20.1	21.3	19.2	20.8	19.9	
12.0	14.0	16.1	16.7	18.4	15.3	16.2	18.6	15.3	16.9	18.1	16.1	17.6	16.7	
14.0	9.5	11.6	12.1	13.8	10.7	11.7	13.9	10.8	12.3	13.4	11.5	12.9	12.1	
16.0	6.3	8.4	8.9	10.5	7.6	8.5	10.6	7.6	9.1	10.1	8.3	9.7	8.9	
18.0		6.0	6.5	8.1		6.1	8.2		6.7	7.7	5.9	7.3	6.5	
20.0				6.2			6.4		4.9	5.9		5.5		
22.0				4.8			4.9			4.4				
危険角度 (°)	56	52	52	41	61	57	53	65	58	54	65	61	67	
伸長状態 (伸長割合%)														
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100	
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100	
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100	
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100	
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t	
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35	
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6	

(単位 : ton)



13.6m — 50.0m

メインブーム

F1性能 C/W 0t O/R 9.2m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	180.0	175.0	150.0							
3.5	161.1	161.2	150.0							
4.0	145.5	145.6	141.4	145.1	146.7	148.1	83.0			
4.5	132.4	132.5	134.2	132.0	133.6	135.1	80.7	131.3	133.0	134.9
5.0	121.2	121.3	123.1	120.8	122.5	124.0	75.6	120.1	121.8	123.8
6.0	99.2	99.5	101.8	98.8	101.0	103.0	67.2	97.8	100.1	102.8
7.0	82.4	82.7	85.0	82.0	84.2	86.2	60.4	81.0	83.3	86.0
8.0	69.9	70.1	72.4	69.4	71.6	73.6	54.8	68.4	70.7	73.4
9.0	60.1	60.3	62.7	59.6	61.8	63.8	50.2	58.6	60.9	63.6
10.0	49.4	49.6	52.7	48.6	51.5	54.1	46.5	47.3	50.3	53.8
11.0	39.7	39.9	42.7	39.0	41.6	44.0	43.5	37.7	40.6	43.8
12.0		32.8	35.5	31.9	34.4	36.7	36.9	30.8	33.4	36.4
14.0		23.2	25.6	22.4	24.7	26.7	26.9	21.3	23.7	26.5
16.0		17.1	19.4	16.2	18.4	20.3	20.5	15.1	17.5	20.1
18.0				11.9	14.0	15.9	16.0	10.8	13.1	15.6
20.0				8.5	10.9	12.7	12.8	7.0	9.9	12.3
22.0								7.0	9.8	11.4
24.0									7.9	9.4
危険角度 (°)	-	-	-	-	-	-	-	34	25	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム		50.0mブーム
5.0	121.0	123.1	115.0	83.0									
6.0	99.1	101.8	102.5	76.5	100.8	102.0	80.0						
7.0	82.3	85.0	85.7	68.7	84.0	85.2	74.4	84.0	83.0	78.0			
8.0	69.7	72.4	73.1	62.3	71.4	72.6	67.9	70.6	73.5	72.1	68.7	72.1	66.7
9.0	59.9	62.6	63.3	56.9	60.2	62.3	62.4	57.3	60.8	63.2	56.2	59.4	55.0
10.0	49.0	52.5	53.4	52.4	49.7	51.7	56.5	47.5	50.8	53.0	47.0	50.0	46.3
11.0	39.3	42.6	43.4	46.1	41.3	42.8	46.4	40.0	43.2	45.3	39.9	42.7	39.5
12.0	32.2	35.3	36.1	38.7	34.1	35.5	38.9	34.1	36.5	38.1	34.2	37.0	34.1
14.0	22.6	25.5	26.1	28.5	24.3	25.6	28.7	24.4	26.5	28.0	25.4	27.4	26.0
16.0	16.4	19.1	19.7	21.9	18.0	19.2	22.1	18.0	20.0	21.4	18.9	20.8	19.7
18.0	12.0	14.6	15.2	17.3	13.5	14.7	17.4	13.6	15.5	16.8	14.4	16.2	15.2
20.0	8.6	11.3	11.9	13.9	10.3	11.4	14.0	10.3	12.1	13.4	11.1	12.8	11.9
22.0	5.6	8.8	9.3	11.3	7.5	8.8	11.4	7.5	9.5	10.8	8.6	10.2	9.3
24.0		6.5	7.2	9.2		6.5	9.3		7.4	8.7	6.1	8.2	7.1
26.0				7.6			7.6		5.4	7.0	4.1	6.3	5.1
28.0				6.1			6.1			5.3		4.6	
30.0							4.7						
危険角度 (°)	41	35	35	-	49	44	27	54	48	44	52	49	57
伸長状態 (伸長割合%)													
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

F2性能 C/W 0t O/R 8.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	180.0	175.0	150.0							
3.5	161.1	161.2	150.0							
4.0	145.5	145.6	141.4	145.1	146.7	148.1	83.0			
4.5	132.4	132.5	134.2	132.0	133.6	135.1	80.7	131.3	133.0	134.9
5.0	121.2	121.3	123.1	120.8	122.5	124.0	75.6	120.1	121.8	123.8
6.0	99.2	99.5	101.8	98.8	101.0	103.0	67.2	97.8	100.1	102.8
7.0	82.4	82.7	85.0	82.0	84.2	86.2	60.4	81.0	83.3	86.0
8.0	69.0	69.3	72.4	68.2	71.5	73.6	54.8	64.3	68.5	73.3
9.0	52.0	52.2	55.3	51.3	54.1	58.8	50.2	49.9	53.0	56.5
10.0	40.8	41.0	43.9	40.1	42.8	45.2	45.4	38.9	41.7	44.9
11.0	33.0	33.1	35.8	32.3	34.8	37.1	37.2	31.1	33.8	36.8
12.0		27.3	29.8	26.5	28.9	31.0	31.2	25.4	27.9	30.7
14.0		19.2	21.6	18.4	20.6	22.6	22.8	17.4	19.7	22.4
16.0		14.0	16.2	13.1	15.2	17.1	17.3	12.1	14.3	16.8
18.0				9.2	11.5	13.2	13.4	7.9	10.5	13.0
20.0				5.9	8.7	10.4	10.6		7.4	10.1
22.0										7.9
24.0										5.9
危険角度 (°)	-	-	-	-	-	-	-	43	34	-
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム		50.0mブーム
5.0	121.0	123.1	115.0	83.0									
6.0	99.1	101.8	102.5	76.5	100.8	102.0	80.0						
7.0	80.7	85.0	85.7	68.7	78.6	80.9	74.4	73.9	77.8	78.0			
8.0	62.6	67.4	68.7	62.3	61.9	64.0	67.9	58.7	62.2	64.6	57.3	60.5	55.9
9.0	50.1	54.8	55.7	56.9	50.2	52.2	57.0	47.9	51.2	53.4	47.2	50.2	46.3
10.0	40.4	43.8	44.6	47.4	41.5	43.4	47.6	39.8	42.9	45.0	39.5	42.3	39.1
11.0	32.6	35.7	36.5	39.0	34.5	35.9	39.3	33.5	36.5	38.5	33.5	36.2	33.4
12.0	26.7	29.7	30.4	32.8	28.5	29.8	33.1	28.5	30.8	32.3	28.7	31.3	28.7
14.0	18.6	21.4	22.0	24.3	20.3	21.5	24.5	20.3	22.4	23.8	21.3	23.2	21.8
16.0	13.3	15.9	16.5	18.6	14.8	16.0	18.8	14.9	16.8	18.1	15.8	17.6	16.6
18.0	9.4	12.0	12.6	14.6	11.0	12.1	14.8	11.0	12.9	14.1	11.9	13.6	12.6
20.0	6.0	9.1	9.7	11.6	7.9	9.2	11.8	8.0	9.9	11.1	8.9	10.6	9.7
22.0		6.6	7.3	9.3		6.7	9.4		7.6	8.8	6.3	8.3	7.3
24.0				7.5			7.6		5.4	7.0	4.1	6.3	5.1
26.0				5.8			5.9			5.2		4.5	
28.0				4.4			4.5						
危険角度 (°)	47	41	41	15	53	49	34	58	51	48	56	52	59
伸長状態 (伸長割合%)													
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

F3性能 C/W 0t O/R 7.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	180.0	175.0	150.0							
3.5	161.1	161.2	150.0							
4.0	145.5	145.6	141.4	145.1	146.7	148.1	83.0			
4.5	132.4	132.5	134.2	132.0	133.6	135.1	80.7	131.3	133.0	134.9
5.0	121.2	121.3	123.1	120.8	122.5	124.0	75.6	120.1	121.8	123.8
6.0	99.2	99.5	101.8	96.1	100.6	103.0	67.2	86.3	90.9	96.2
7.0	67.3	67.5	70.9	66.6	69.6	72.4	60.4	63.9	68.0	72.1
8.0	48.8	49.1	52.0	48.2	50.9	53.3	53.5	47.0	49.8	53.1
9.0	37.4	37.6	40.2	36.8	39.2	41.4	41.6	35.6	38.2	41.2
10.0	29.6	29.7	32.2	29.0	31.2	33.3	33.5	27.9	30.3	33.1
11.0	23.9	24.0	26.4	23.3	25.5	27.4	27.6	22.3	24.6	27.2
12.0		19.7	22.0	19.0	21.1	23.0	23.1	18.0	20.3	22.8
14.0		13.7	15.8	13.0	14.9	16.7	16.8	12.0	14.1	16.5
16.0		9.7	11.7	8.9	10.8	12.5	12.6	8.0	10.0	12.3
18.0				5.7	7.9	9.5	9.6		7.1	9.2
20.0					5.6	7.3	7.4			7.0
22.0										6.7
24.0										5.3
危険角度 (°)	-	-	-	25	-	-	-	49	43	34
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム		50.0mブーム
5.0	115.9	122.2	115.0	83.0									
6.0	82.0	87.3	88.7	76.5	79.2	81.6	80.0						
7.0	61.8	66.6	67.8	68.7	60.8	62.9	68.0	57.3	60.9	63.2			
8.0	48.4	51.9	52.8	55.6	48.3	50.3	55.0	45.9	49.1	51.3	45.1	48.0	44.2
9.0	37.0	40.1	40.9	43.4	38.9	40.3	43.7	37.5	40.6	42.7	37.2	40.0	36.7
10.0	29.2	32.1	32.8	35.2	31.0	32.2	35.4	31.0	33.2	34.7	31.1	33.8	31.0
11.0	23.5	26.3	26.9	29.2	25.2	26.4	29.4	25.2	27.3	28.7	26.2	28.1	26.3
12.0	19.2	21.8	22.5	24.6	20.8	22.0	24.8	20.9	22.8	24.2	21.8	23.6	22.6
14.0	13.2	15.6	16.2	18.2	14.6	15.7	18.3	14.7	16.5	17.7	15.5	17.2	16.2
16.0	9.1	11.4	11.9	13.8	10.4	11.5	14.0	10.5	12.2	13.4	11.3	12.9	12.0
18.0	5.9	8.4	8.9	10.7	7.4	8.5	10.9	7.5	9.1	10.3	8.2	9.8	8.9
20.0		6.1	6.6	8.4		6.2	8.5		6.8	7.9	5.9	7.5	6.6
22.0				6.6			6.7		4.8	6.1		5.7	
24.0				5.1			5.2			4.5			
危険角度 (°)	52	47	47	35	57	53	44	63	54	51	62	59	65
伸長状態 (伸長割合%)													
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

F4性能 C/W 0t O/R 6.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム			
2.5	200.0									
3.0	180.0	175.0	150.0							
3.5	161.1	161.2	150.0							
4.0	145.5	145.6	141.4	145.1	146.7	148.1	83.0			
4.5	132.4	132.5	134.2	124.4	129.4	134.1	80.7	109.0	114.1	119.9
5.0	117.5	113.1	118.4	100.3	104.9	109.1	75.6	89.1	93.7	99.0
6.0	71.2	71.5	74.9	70.5	73.5	76.4	67.2	63.3	67.4	72.0
7.0	49.3	49.5	52.4	48.6	51.3	53.8	54.0	47.4	50.2	53.5
8.0	36.5	36.7	39.3	35.9	38.3	40.5	40.7	34.8	37.4	40.3
9.0	28.1	28.3	30.7	27.6	29.8	31.9	32.0	26.6	28.9	31.6
10.0	22.3	22.4	24.7	21.7	23.8	25.8	25.9	20.7	23.0	25.5
11.0	17.9	18.0	20.2	17.4	19.4	21.2	21.4	16.4	18.6	21.0
12.0		14.6	16.8	14.0	16.0	17.7	17.9	13.1	15.2	17.5
14.0		9.8	11.8	9.1	11.0	12.7	12.8	8.3	10.2	12.5
16.0		6.5	8.5		7.7	9.3	9.4		6.9	9.1
18.0						6.8	6.9			6.6
20.0							5.0			
22.0										4.6
危険角度 (°)	-	-	-	45	35	25	-	55	49	43
伸長状態 (伸長割合%)										
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60
掛数	19	16	14	14	16	14	7	12	14	14

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム		50.0mブーム
5.0	83.7	89.0	90.4	83.0									
6.0	60.8	65.6	66.8	70.7	59.5	61.6	66.6						
7.0	46.4	50.7	51.8	55.4	46.1	48.0	52.7	43.6	46.8	49.0			
8.0	36.2	39.2	40.0	42.5	36.8	38.6	42.7	34.9	38.0	40.0	34.6	37.3	34.1
9.0	27.8	30.7	31.4	33.7	29.6	30.8	33.9	28.5	31.3	33.2	28.4	31.1	28.3
10.0	21.9	24.6	25.3	27.5	23.6	24.8	27.7	23.4	25.6	27.0	23.7	26.2	23.7
11.0	17.6	20.1	20.7	22.8	19.1	20.2	23.0	19.2	21.1	22.4	19.8	21.8	20.0
12.0	14.2	16.6	17.3	19.3	15.7	16.8	19.4	15.7	17.6	18.8	16.6	18.3	17.0
14.0	9.3	11.6	12.2	14.1	10.7	11.8	14.3	10.8	12.5	13.7	11.6	13.2	12.2
16.0		8.2	8.8	10.6	7.3	8.3	10.7		9.0	10.2	8.1	9.7	8.8
18.0		5.7	6.2	8.0		5.8	8.1		6.5	7.6		7.1	
20.0				6.1			6.2		4.2	5.6		5.1	
22.0				4.4			4.6						
危険角度 (°)	60	52	52	41	62	59	49	67	60	58	67	62	69
伸長状態 (伸長割合%)													
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

メインブーム

F5性能 C/W 0t O/R 5.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム				27.25mブーム				
2.5	200.0										
3.0	180.0	175.0	150.0								
3.5	161.1	161.2	150.0								
4.0	136.2	122.1	127.5	106.3	110.9	115.2	83.0				
4.5	95.2	95.5	99.3	85.4	89.5	93.4	80.7	75.5	79.7	84.7	83.0
5.0	72.0	72.3	75.6	70.5	74.3	77.1	75.6	62.7	66.7	71.3	75.1
6.0	46.7	47.0	49.7	46.2	48.6	50.9	51.1	45.0	47.6	50.9	53.1
7.0	33.2	33.4	35.8	32.7	34.9	36.9	37.1	31.7	34.0	36.7	38.9
8.0	24.8	25.0	27.2	24.3	26.4	28.2	28.4	23.4	25.6	28.0	30.0
9.0	19.1	19.3	21.4	18.6	20.6	22.3	22.5	17.7	19.8	22.1	24.0
10.0	15.0	15.1	17.1	14.5	16.3	18.0	18.2	13.6	15.6	17.8	19.6
11.0	11.9	11.9	13.9	11.4	13.1	14.8	14.9	10.5	12.4	14.6	16.3
12.0		9.5	11.4	8.9	10.6	12.2	12.3	8.1	9.9	12.0	13.6
14.0		5.9	7.7		7.0	8.5	8.6		6.3	8.3	9.8
16.0						5.9	6.0			5.7	7.2
18.0							4.1				5.2
危険角度 (°)	-	20	20	53	45	35	25	61	56	49	43
伸長状態 (伸長割合%)											
ブーム2 (%)	0	0	0	50	0	0	0	100	50	0	0
ブーム3 (%)	0	50	0	50	50	0	0	50	50	50	0
ブーム4 (%)	0	0	0	0	50	50	0	0	50	50	50
ブーム5 (%)	0	0	50	0	0	50	100	0	0	50	100
フック種類	200t	200t	200t	200t	200t	200t	83t	200t	200t	200t	83t
フック質量 (t)	2.60	2.60	2.60	2.60	2.60	2.60	1.35	2.60	2.60	2.60	1.35
掛数	19	16	14	14	16	14	7	12	14	14	7

(単位 : ton)

作業半径 (m)	31.8mブーム				36.35mブーム			40.9mブーム			45.45mブーム		50.0mブーム
5.0	59.7	64.3	65.6	69.4									
6.0	44.0	48.2	49.3	52.8	43.6	45.4	50.0						
7.0	33.0	35.7	36.5	38.8	33.9	35.6	39.0	32.0	35.0	36.9			
8.0	24.6	27.1	27.8	29.9	26.1	27.3	30.1	25.5	28.2	29.5	25.5	28.0	25.3
9.0	18.8	21.3	21.9	23.9	20.3	21.4	24.1	20.4	22.2	23.5	20.7	22.9	20.8
10.0	14.7	17.0	17.6	19.5	16.1	17.1	19.7	16.1	17.9	19.1	17.0	18.6	17.2
11.0	11.5	13.8	14.3	16.2	12.9	13.9	16.3	12.9	14.6	15.8	13.8	15.3	14.3
12.0	9.1	11.3	11.8	13.6	10.4	11.4	13.7	10.4	12.1	13.2	11.2	12.7	11.8
14.0		7.5	8.1	9.7		7.6	9.9		8.3	9.4	7.5	8.9	8.0
16.0				7.1			7.2		5.7	6.7		6.3	
18.0				5.1			5.2			4.7			
危険角度 (°)	66	60	60	52	68	66	57	72	66	62	72	68	73
伸長状態 (伸長割合%)													
ブーム2 (%)	100	50	0	0	100	50	0	100	50	0	100	50	100
ブーム3 (%)	50	50	100	0	50	100	50	100	100	100	100	100	100
ブーム4 (%)	50	50	50	100	50	50	100	50	100	100	100	100	100
ブーム5 (%)	0	50	50	100	50	50	100	50	50	100	50	100	100
フック種類	200t	200t	200t	83t	200t	200t	83t	200t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	2.60	1.35	2.60	2.60	1.35	2.60	1.35	1.35	1.35	1.35	1.35
掛数	12	12	10	7	10	10	7	10	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

ブームロックピン無し

AS性能 C/W 100t O/R 9.2m C/S使用 ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	102.0	95.0	67.2	73.2	75.9	75.9			
7.0	102.0	95.0	60.4	67.4	68.7	72.1	72.1		
8.0	102.0	95.0	54.8	62.1	62.3	67.3	69.6	69.6	69.6
9.0	102.0	92.9	50.2	57.4	56.9	62.4	66.0	67.7	68.5
10.0	102.0	87.2	46.5	53.2	52.4	57.7	61.8	64.8	66.6
11.0	95.9	82.4	43.5	49.7	48.5	53.6	57.6	61.0	63.8
12.0		37.1	40.5	46.7	45.1	50.0	53.9	57.5	60.5
14.0		29.5	36.0	41.4	39.4	44.1	47.8	51.5	54.1
16.0		23.5	32.5	37.2	34.7	39.3	42.7	45.9	49.0
18.0			18.8	32.9	31.0	35.3	38.2	41.7	44.7
20.0			15.0	27.2	27.9	31.9	34.4	37.7	40.5
22.0				13.6	25.2	29.0	31.1	34.3	36.6
24.0				10.7	20.6	25.7	28.2	31.4	33.3
26.0					16.0	22.0	25.7	28.8	30.5
28.0					11.1	18.1	22.7	26.3	28.0
30.0						7.7	19.4	23.5	25.9
32.0						5.9	15.3	20.3	23.6
34.0						4.2	11.5	17.1	21.0
36.0							4.5	13.8	18.3
38.0								10.6	15.5
40.0									12.6
42.0									9.7
危険角度 (°)	-	-	-	-	-	-	20	28	28
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)

A1性能 C/W 100t O/R 9.2m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	102.0	95.0	67.2	73.2	75.9	75.9			
7.0	102.0	95.0	60.4	67.4	68.7	72.1	72.1		
8.0	102.0	95.0	54.8	62.1	62.3	67.3	69.6	69.6	69.6
9.0	102.0	92.9	50.2	57.4	56.9	62.4	66.0	67.7	68.5
10.0	102.0	87.2	46.5	53.2	52.4	57.7	61.8	64.8	66.6
11.0	94.5	82.4	43.5	49.7	48.5	53.6	57.6	61.0	63.8
12.0		37.1	40.5	46.7	45.1	50.0	53.9	57.5	60.5
14.0		29.5	36.0	41.4	39.4	44.1	47.8	51.5	54.1
16.0		23.5	32.5	37.2	34.7	39.3	42.7	45.9	49.0
18.0			18.8	32.9	31.0	35.3	38.2	41.7	44.7
20.0			15.0	27.2	27.9	31.9	34.4	37.7	40.5
22.0				13.6	25.2	29.0	31.1	34.3	36.6
24.0				10.7	20.6	25.7	28.2	31.4	33.3
26.0					16.0	22.0	25.7	28.8	30.5
28.0					11.1	18.1	22.7	26.3	28.0
30.0						7.7	19.4	23.5	25.9
32.0						5.9	15.3	20.3	23.6
34.0						4.2	11.5	17.1	21.0
36.0							4.5	13.8	18.3
38.0								10.6	15.5
40.0									12.6
42.0									9.7
危険角度 (°)	-	-	-	-	-	-	20	28	28
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

ブームロックピン無し

A2性能 C/W 100t O/R 8.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	102.0	95.0	67.2	73.2	75.9	75.9			
7.0	102.0	95.0	60.4	67.4	68.7	72.1	72.1		
8.0	102.0	95.0	54.8	62.1	62.3	67.3	69.6	69.6	69.6
9.0	102.0	92.9	50.2	57.4	56.9	62.4	66.0	67.7	68.5
10.0	102.0	87.2	46.5	53.2	52.4	57.7	61.8	64.8	66.6
11.0	94.5	82.4	43.5	49.7	48.5	53.6	57.6	61.0	63.8
12.0		37.1	40.5	46.7	45.1	50.0	53.9	57.5	60.5
14.0		29.5	36.0	41.4	39.4	44.1	47.8	51.5	54.1
16.0		23.5	32.5	37.2	34.7	39.3	42.7	45.9	49.0
18.0			18.8	32.9	31.0	35.3	38.2	41.7	44.7
20.0			15.0	27.2	27.9	31.9	34.4	37.7	40.5
22.0				13.6	25.2	29.0	31.1	34.3	36.6
24.0				10.7	20.6	25.7	28.2	31.4	33.3
26.0					16.0	22.0	25.7	28.8	30.5
28.0					11.1	18.1	22.7	26.3	28.0
30.0						7.7	19.4	23.5	25.9
32.0						5.9	15.3	20.3	23.6
34.0						4.2	11.5	17.1	21.0
36.0							4.5	13.8	18.3
38.0								10.6	15.5
40.0									12.6
42.0									9.7
危険角度 (°)	-	-	-	-	-	-	20	28	28
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位: ton)

B1性能 C/W 60t O/R 9.2m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	102.0	95.0	67.2	73.2	75.9	75.9			
7.0	102.0	95.0	60.4	67.4	68.7	72.1	72.1		
8.0	102.0	95.0	54.8	62.1	62.3	67.3	69.6	69.6	69.6
9.0	95.0	92.9	50.2	57.4	56.9	62.4	66.0	67.7	68.5
10.0	85.4	84.2	46.5	53.2	52.4	57.7	61.8	64.8	66.6
11.0	77.4	76.1	43.5	49.7	48.5	53.6	57.6	61.0	63.8
12.0		37.1	40.5	46.7	45.1	50.0	53.9	57.5	60.5
14.0		29.5	36.0	41.4	39.4	44.1	47.8	51.5	54.1
16.0		23.5	32.5	37.2	34.7	39.3	42.7	45.9	49.0
18.0			18.8	32.9	31.0	35.3	38.2	41.7	43.7
20.0			15.0	27.2	27.9	31.9	34.4	36.8	37.5
22.0				13.6	25.2	29.0	30.3	31.5	32.2
24.0				10.7	20.6	25.3	26.0	27.1	27.8
26.0					16.0	21.8	22.4	23.6	24.3
28.0					11.1	18.1	19.5	20.6	21.3
30.0						7.7	17.1	18.1	18.8
32.0						5.9	15.0	16.0	16.7
34.0						4.2	11.5	14.2	14.9
36.0							4.5	12.7	13.3
38.0								10.6	11.9
40.0									10.7
42.0									9.6
危険角度 (°)	-	-	-	-	-	-	20	28	28
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位: ton)



13.6m — 50.0m

ブームロックピン無し

B2性能 C/W 60t O/R 8.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	102.0	95.0	67.2	73.2	75.9	75.9			
7.0	102.0	95.0	60.4	67.4	68.7	72.1	72.1		
8.0	102.0	95.0	54.8	62.1	62.3	67.3	69.6	69.6	69.6
9.0	95.0	92.9	50.2	57.4	56.9	62.4	66.0	67.7	68.5
10.0	85.4	84.2	46.5	53.2	52.4	57.7	61.8	64.8	66.6
11.0	77.4	76.1	43.5	49.7	48.5	53.6	57.6	61.0	63.8
12.0		37.1	40.5	46.7	45.1	50.0	53.9	57.5	60.5
14.0		29.5	36.0	41.4	39.4	44.1	47.8	51.5	54.1
16.0		23.5	32.5	37.2	34.7	39.3	42.7	45.9	49.0
18.0			18.8	32.9	31.0	35.3	38.2	39.6	40.3
20.0			15.0	27.2	27.9	31.3	31.9	33.2	33.9
22.0				13.6	25.2	26.4	27.0	28.2	28.9
24.0				10.7	20.6	22.5	23.1	24.2	24.9
26.0					16.0	19.3	19.9	21.0	21.7
28.0					11.1	16.7	17.2	18.3	19.0
30.0						7.7	15.0	16.1	16.7
32.0						5.9	13.1	14.1	14.8
34.0						4.2	11.5	12.5	13.1
36.0							4.5	11.0	11.6
38.0								9.8	10.4
40.0									9.3
42.0									8.3
危険角度 (°)	-	-	-	-	-	-	20	28	28
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)

B3性能 C/W 60t O/R 7.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	102.0	95.0	67.2	73.2	75.9	75.9			
7.0	102.0	95.0	60.4	67.4	68.7	72.1	72.1		
8.0	102.0	95.0	54.8	62.1	62.3	67.3	69.6	69.6	69.6
9.0	95.0	92.9	50.2	57.4	56.9	62.4	66.0	67.7	68.5
10.0	83.1	81.6	46.5	53.2	52.4	57.7	61.8	64.8	66.6
11.0	70.1	68.7	43.5	49.7	48.5	53.6	57.6	61.0	63.8
12.0		37.1	40.5	46.7	45.1	50.0	53.9	57.5	60.5
14.0		29.5	36.0	41.4	39.4	44.1	47.0	48.3	49.0
16.0		23.5	32.5	35.4	34.7	36.9	37.5	38.7	39.4
18.0			18.8	28.7	29.1	30.1	30.7	31.8	32.5
20.0			15.0	23.6	24.0	24.9	25.5	26.6	27.3
22.0				13.6	20.1	21.0	21.5	22.6	23.2
24.0				10.7	16.9	17.8	18.3	19.4	20.0
26.0					14.3	15.2	15.7	16.7	17.3
28.0					11.1	13.0	13.5	14.5	15.1
30.0						7.7	11.7	12.6	13.2
32.0						5.9	10.1	11.0	11.6
34.0						4.2	8.8	9.6	10.2
36.0							4.5	8.4	9.0
38.0								7.4	7.9
40.0									7.0
42.0									6.2
危険角度 (°)	-	-	-	-	-	-	20	28	28
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

ブームロックピン無し

B4性能 C/W 60t O/R 6.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	102.0	95.0	67.2	73.2	75.9	75.9			
7.0	102.0	95.0	60.4	67.4	68.7	72.1	72.1		
8.0	102.0	95.0	54.8	62.1	62.3	67.3	69.6	69.6	69.6
9.0	82.9	81.5	50.2	57.4	56.9	62.4	66.0	67.7	68.5
10.0	68.9	67.6	46.5	53.2	52.4	57.7	61.8	64.8	66.6
11.0	58.6	57.3	43.5	49.7	48.5	53.6	57.6	60.8	61.5
12.0		37.1	40.5	46.7	45.1	50.0	51.4	52.7	53.4
14.0		29.5	36.0	37.6	38.1	39.1	39.7	41.0	41.7
16.0		23.5	29.0	29.8	30.2	31.2	31.8	32.9	33.6
18.0			18.8	24.0	24.4	25.4	26.0	27.1	27.7
20.0			15.0	19.7	20.1	21.0	21.5	22.6	23.2
22.0				13.6	16.6	17.5	18.1	19.1	19.7
24.0				10.7	13.9	14.7	15.3	16.3	16.9
26.0					11.6	12.4	13.0	13.9	14.5
28.0					9.8	10.5	11.0	12.0	12.6
30.0						7.7	9.4	10.3	10.9
32.0						5.9	8.1	8.9	9.5
34.0						4.2	6.9	7.7	8.3
36.0							4.5	6.7	7.2
38.0								5.6	6.3
40.0									5.3
42.0									4.4
危険角度 (°)	-	-	-	-	-	-	20	28	28
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位: ton)

C1性能 C/W 40t O/R 9.2m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	102.0	95.0	67.2	73.2	75.9	75.9			
7.0	102.0	95.0	60.4	67.4	68.7	72.1	72.1		
8.0	90.6	89.5	54.8	62.1	62.3	67.3	69.6	69.6	69.6
9.0	80.5	79.4	50.2	57.4	56.9	62.4	66.0	67.7	68.5
10.0	71.3	69.9	46.5	53.2	52.4	57.7	61.8	64.8	66.6
11.0	63.2	61.8	43.5	49.7	48.5	53.6	57.6	61.0	63.8
12.0		37.1	40.5	46.7	45.1	50.0	53.9	57.5	59.7
14.0		29.5	36.0	41.4	39.4	44.1	46.7	48.1	49.1
16.0		23.5	32.5	36.3	34.7	38.0	38.7	40.1	41.1
18.0			18.8	30.2	30.7	31.8	32.5	33.9	34.9
20.0			15.0	25.0	25.4	26.5	27.2	28.4	29.2
22.0				13.6	21.0	22.0	22.7	23.9	24.6
24.0				10.7	17.5	18.5	19.1	20.3	21.0
26.0					14.7	15.6	16.2	17.4	18.0
28.0					11.1	13.3	13.9	14.9	15.6
30.0						7.7	11.9	12.9	13.6
32.0						5.9	10.2	11.2	11.8
34.0						4.2	8.7	9.7	10.3
36.0							4.5	8.4	9.1
38.0								7.0	7.9
40.0									6.7
42.0									5.6
危険角度 (°)	-	-	-	-	-	-	20	28	28
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位: ton)



13.6m — 50.0m

ブームロックピン無し

C2性能 C/W 40t O/R 8.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	102.0	95.0	67.2	73.2	75.9	75.9			
7.0	102.0	95.0	60.4	67.4	68.7	72.1	72.1		
8.0	90.6	89.5	54.8	62.1	62.3	67.3	69.6	69.6	69.6
9.0	80.5	79.4	50.2	57.4	56.9	62.4	66.0	67.7	68.5
10.0	71.3	69.9	46.5	53.2	52.4	57.7	61.8	64.8	66.6
11.0	63.2	61.8	43.5	49.7	48.5	53.6	57.6	61.0	63.8
12.0		37.1	40.5	46.7	45.1	50.0	53.9	57.5	59.7
14.0		29.5	36.0	41.4	39.4	44.1	45.9	47.3	48.1
16.0		23.5	32.5	33.7	34.2	35.3	36.0	37.4	38.2
18.0			18.8	26.9	27.3	28.4	29.1	30.4	31.1
20.0			15.0	21.7	22.2	23.2	23.9	25.1	25.8
22.0				13.6	18.2	19.2	19.9	21.0	21.7
24.0				10.7	15.1	16.0	16.7	17.8	18.5
26.0					12.6	13.5	14.1	15.2	15.8
28.0					10.5	11.3	11.9	13.0	13.6
30.0						7.7	10.1	11.1	11.8
32.0						5.9	8.4	9.6	10.2
34.0						4.2	6.8	8.1	8.8
36.0							4.5	6.7	7.5
38.0								5.4	6.3
40.0									5.2
42.0									4.2
危険角度 (°)	-	-	-	-	-	-	20	28	28
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)

C3性能 C/W 40t O/R 7.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	102.0	95.0	67.2	73.2	75.9	75.9			
7.0	102.0	95.0	60.4	67.4	68.7	72.1	72.1		
8.0	90.6	89.5	54.8	62.1	62.3	67.3	69.6	69.6	69.6
9.0	79.8	78.3	50.2	57.4	56.9	62.4	66.0	67.7	68.5
10.0	65.3	63.8	46.5	53.2	52.4	57.7	61.8	64.8	66.6
11.0	54.7	53.3	43.5	49.7	48.5	53.6	55.6	57.0	57.8
12.0		37.1	40.5	45.1	45.1	46.8	47.5	48.9	49.7
14.0		29.5	33.0	33.9	34.3	35.4	36.1	37.4	38.1
16.0		23.5	25.5	26.3	26.7	27.7	28.4	29.6	30.3
18.0			18.8	20.8	21.2	22.2	22.8	24.0	24.7
20.0			15.0	16.7	17.1	18.1	18.7	19.8	20.4
22.0				13.6	13.9	14.8	15.4	16.5	17.1
24.0				10.7	11.4	12.2	12.8	13.8	14.5
26.0					9.3	10.1	10.7	11.7	12.3
28.0					7.6	8.4	8.9	9.9	10.5
30.0						6.9	7.4	8.4	8.9
32.0						5.3	6.0	7.1	7.6
34.0								5.9	6.5
36.0								4.6	5.5
38.0									4.3
危険角度 (°)	-	-	-	-	-	15	33	33	37
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

ブームロックピン無し

C4性能 C/W 40t O/R 6.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	102.0	95.0	67.2	73.2	75.9	75.9			
7.0	102.0	95.0	60.4	67.4	68.7	72.1	72.1		
8.0	80.6	79.1	54.8	62.1	62.3	67.3	69.6	69.6	69.6
9.0	64.6	63.3	50.2	57.4	56.9	62.4	65.6	67.1	66.3
10.0	53.4	52.1	46.5	51.9	52.4	53.6	54.3	55.7	56.5
11.0	45.1	43.7	42.7	43.6	44.0	45.2	45.9	47.2	48.0
12.0		37.1	36.3	37.1	37.6	38.7	39.4	40.7	41.4
14.0		28.1	27.0	27.9	28.3	29.3	30.0	31.2	31.9
16.0		21.8	20.7	21.5	21.9	22.9	23.5	24.7	25.3
18.0			16.2	16.9	17.3	18.2	18.8	19.9	20.6
20.0			12.7	13.4	13.8	14.7	15.2	16.3	16.9
22.0				10.6	11.0	11.9	12.4	13.5	14.1
24.0				8.5	8.8	9.6	10.2	11.2	11.8
26.0					6.9	7.8	8.3	9.3	9.9
28.0					5.0	6.1	6.8	7.7	8.3
30.0						4.4	5.2	6.4	7.0
32.0								5.0	5.8
34.0									4.6
危険角度 (°)	-	-	-	-	15	27	39	42	44
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)

C5性能 C/W 40t O/R 5.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	102.0	95.0	67.2	73.2	75.9	75.9			
7.0	76.5	75.2	60.4	67.4	68.7	72.1	72.1		
8.0	59.9	58.7	54.8	58.5	59.0	60.2	60.9	60.9	60.9
9.0	48.6	47.4	46.4	47.3	47.7	48.8	49.5	50.8	51.5
10.0	40.5	39.3	38.3	39.1	39.6	40.6	41.2	42.5	43.2
11.0	34.3	33.1	32.1	32.9	33.4	34.4	35.0	36.2	36.8
12.0		28.3	27.3	28.1	28.5	29.5	30.1	31.2	31.9
14.0		21.2	20.2	21.0	21.4	22.3	22.9	23.9	24.6
16.0		16.2	15.3	16.0	16.4	17.3	17.8	18.9	19.5
18.0			11.7	12.4	12.7	13.6	14.1	15.1	15.7
20.0			9.0	9.6	9.9	10.7	11.3	12.2	12.8
22.0				7.4	7.7	8.5	9.0	10.0	10.5
24.0					5.9	6.7	7.2	8.1	8.7
26.0						5.2	5.7	6.6	7.2
28.0								5.3	5.9
30.0									4.8
危険角度 (°)	-	-	-	25	35	39	48	49	51
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

ブームロックピン無し

D1性能 C/W 25t O/R 9.2m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	102.0	95.0	67.2	73.2	75.9	75.9			
7.0	97.8	95.0	60.4	67.4	68.7	72.1	72.1		
8.0	84.6	83.3	54.8	62.1	62.3	67.3	69.6	69.6	69.6
9.0	73.2	71.9	50.2	57.4	56.9	62.4	66.0	67.7	68.5
10.0	64.1	62.8	46.5	53.2	52.4	57.7	61.8	64.8	66.6
11.0	56.7	55.3	43.5	49.7	48.5	53.6	57.6	59.0	60.0
12.0		37.1	40.5	46.7	45.1	50.0	51.3	52.8	53.8
14.0		29.5	36.0	39.0	39.4	40.8	41.6	43.0	44.0
16.0		23.5	28.9	29.8	30.3	31.5	32.2	33.6	34.4
18.0			18.8	23.3	23.8	24.9	25.6	26.9	27.7
20.0			15.0	18.5	19.0	20.0	20.7	22.0	22.7
22.0				13.6	15.3	16.3	17.0	18.2	18.9
24.0				10.7	12.4	13.4	14.0	15.1	15.8
26.0					10.0	11.0	11.6	12.7	13.4
28.0					7.7	8.9	9.6	10.7	11.4
30.0						6.9	7.7	9.0	9.7
32.0						5.2	6.0	7.3	8.2
34.0								5.8	6.7
36.0								4.5	5.4
38.0									4.3
危険角度 (°)	-	-	-	-	-	15	33	33	37
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)

D2性能 C/W 25t O/R 8.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	102.0	95.0	67.2	73.2	75.9	75.9			
7.0	97.8	95.0	60.4	67.4	68.7	72.1	72.1		
8.0	84.6	83.3	54.8	62.1	62.3	67.3	69.6	69.6	69.6
9.0	73.2	71.9	50.2	57.4	56.9	62.4	66.0	67.7	68.5
10.0	64.1	62.8	46.5	53.2	52.4	57.7	61.8	64.8	65.9
11.0	56.5	54.9	43.5	49.7	48.5	53.6	57.5	58.2	57.4
12.0		37.1	40.5	45.8	45.1	47.7	48.5	50.1	50.5
14.0		29.5	32.7	33.7	34.2	35.4	36.1	37.6	38.4
16.0		23.5	24.7	25.6	26.1	27.3	28.0	29.3	30.1
18.0			18.8	19.9	20.4	21.5	22.2	23.4	24.2
20.0			15.0	15.7	16.2	17.2	17.8	19.1	19.8
22.0				12.5	12.9	13.9	14.5	15.7	16.4
24.0				9.7	10.3	11.2	11.8	13.0	13.7
26.0					7.7	9.0	9.7	10.8	11.5
28.0					5.7	6.8	7.6	9.0	9.6
30.0						5.0	5.8	7.2	8.1
32.0								5.6	6.5
34.0									5.1
危険角度 (°)	-	-	-	-	15	27	39	42	44
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

ブームロックピン無し

D3性能 C/W 25t O/R 7.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	102.0	95.0	67.2	73.2	75.9	75.9			
7.0	97.8	95.0	60.4	67.4	68.7	72.1	72.1		
8.0	81.6	79.9	54.8	62.1	62.3	67.3	69.6	69.6	69.6
9.0	63.9	62.4	50.2	57.4	56.9	62.4	65.0	65.0	63.7
10.0	51.9	50.5	46.5	50.3	50.8	52.1	52.9	54.4	54.9
11.0	43.2	41.8	40.6	41.6	42.1	43.3	44.1	45.5	46.3
12.0		35.2	34.1	35.0	35.5	36.7	37.4	38.8	39.5
14.0		25.9	24.9	25.7	26.2	27.2	27.9	29.2	29.9
16.0		19.7	18.6	19.4	19.9	20.9	21.5	22.7	23.4
18.0			14.2	14.9	15.4	16.3	16.9	18.1	18.8
20.0			10.9	11.6	12.0	12.9	13.5	14.6	15.3
22.0				9.0	9.3	10.2	10.8	11.9	12.5
24.0				6.7	7.2	8.1	8.6	9.7	10.3
26.0					5.0	6.2	6.9	7.9	8.5
28.0						4.3	5.1	6.4	7.0
30.0								4.9	5.7
32.0									4.3
危険角度 (°)	-	-	-	-	25	34	44	46	48
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)

D4性能 C/W 25t O/R 6.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	102.0	95.0	67.2	73.2	75.9	75.9			
7.0	84.1	82.5	60.4	67.4	68.7	72.1	72.1		
8.0	64.1	62.6	54.8	62.1	62.3	64.4	63.2	62.5	61.1
9.0	51.0	49.6	48.4	49.4	49.9	51.2	52.0	53.0	52.1
10.0	41.7	40.4	39.3	40.2	40.7	41.9	42.6	44.1	44.9
11.0	34.9	33.6	32.5	33.4	33.9	35.0	35.7	37.1	37.8
12.0		28.3	27.3	28.1	28.6	29.7	30.4	31.6	32.4
14.0		20.7	19.7	20.5	21.0	22.0	22.6	23.8	24.5
16.0		15.6	14.5	15.3	15.7	16.7	17.3	18.5	19.1
18.0			10.8	11.5	11.9	12.9	13.5	14.6	15.2
20.0			8.0	8.7	9.0	9.9	10.5	11.6	12.2
22.0				6.1	6.6	7.7	8.2	9.3	9.9
24.0						5.5	6.3	7.4	8.0
26.0								5.7	6.4
28.0									4.9
危険角度 (°)	-	-	-	25	41	44	51	52	54
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

ブームロックピン無し

D5性能 C/W 25t O/R 5.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	82.0	80.5	67.2	73.2	75.9	75.9			
7.0	60.3	59.0	57.8	58.8	59.3	60.0	60.0		
8.0	46.8	45.5	44.4	45.4	45.8	47.0	47.7	47.7	47.7
9.0	37.6	36.4	35.3	36.2	36.7	37.8	38.4	39.7	40.5
10.0	30.9	29.7	28.8	29.6	30.0	31.1	31.7	32.9	33.6
11.0	25.9	24.7	23.8	24.5	25.0	26.0	26.6	27.8	28.4
12.0		20.8	19.8	20.6	21.0	22.0	22.6	23.7	24.4
14.0		15.0	14.1	14.8	15.2	16.1	16.7	17.8	18.4
16.0		11.0	10.1	10.8	11.2	12.0	12.6	13.6	14.2
18.0			7.2	7.8	8.2	9.0	9.6	10.6	11.2
20.0			4.5		5.9	6.7	7.2	8.2	8.8
22.0						4.7	5.4	6.4	6.9
24.0								4.9	5.4
26.0									4.0
危険角度 (°)	-	-	-	43	47	49	54	56	57
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)

E1性能 C/W 10t O/R 9.2m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	102.0	95.0	67.2	73.2	75.9	75.9			
7.0	88.9	87.6	60.4	67.4	68.7	72.1	72.1		
8.0	75.5	74.2	54.8	62.1	62.3	67.3	69.6	69.6	69.6
9.0	65.1	63.8	50.2	57.4	56.9	62.4	66.0	67.6	68.2
10.0	56.8	55.5	46.5	53.2	52.4	57.1	57.8	58.9	57.9
11.0	49.9	48.2	43.5	47.9	48.5	50.1	50.2	50.4	49.8
12.0		37.1	38.5	39.6	40.2	41.6	42.4	43.7	43.4
14.0		28.5	27.2	28.2	28.8	30.0	30.8	32.3	33.2
16.0		21.2	19.9	20.9	21.4	22.5	23.3	24.7	25.5
18.0			14.9	15.7	16.2	17.3	18.0	19.3	20.1
20.0			11.2	11.9	12.4	13.4	14.1	15.4	16.1
22.0				8.7	9.3	10.5	11.1	12.3	13.0
24.0				5.9	6.5	7.8	8.7	9.9	10.6
26.0						5.5	6.3	7.8	8.6
28.0								5.9	6.8
30.0									5.1
危険角度 (°)	-	-	-	-	35	39	48	49	51
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

ブームロックピン無し

E2性能 C/W 10t O/R 8.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	102.0	95.0	67.2	73.2	75.9	75.9			
7.0	88.9	87.6	60.4	67.4	68.7	72.1	72.1		
8.0	75.5	74.2	54.8	62.1	62.3	67.3	69.6	69.6	69.6
9.0	65.0	63.2	50.2	57.4	56.9	61.6	59.9	59.5	58.3
10.0	51.6	49.9	46.5	49.7	50.3	51.3	50.2	50.3	49.6
11.0	42.2	40.5	39.2	40.3	40.9	42.3	42.7	43.1	42.8
12.0		33.6	32.3	33.4	33.9	35.3	36.1	37.4	37.2
14.0		24.0	22.8	23.7	24.3	25.5	26.2	27.7	28.5
16.0		17.7	16.5	17.4	17.9	19.0	19.7	21.1	21.8
18.0			12.1	12.9	13.4	14.4	15.1	16.4	17.1
20.0			8.3	9.3	9.9	11.0	11.7	12.9	13.6
22.0				6.2	6.8	8.1	9.0	10.2	10.9
24.0						5.6	6.4	8.0	8.7
26.0								5.8	6.8
28.0									5.0
危険角度 (°)	-	-	-	25	41	44	51	52	54
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)

E3性能 C/W 10t O/R 7.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	102.0	95.0	67.2	73.2	75.9	75.9			
7.0	83.9	82.1	60.4	67.4	68.7	72.1	71.9		
8.0	61.6	60.0	54.8	59.7	60.4	59.9	58.1	57.6	56.2
9.0	47.7	46.2	44.9	46.0	46.6	48.0	48.0	48.1	47.3
10.0	38.3	36.8	35.6	36.6	37.2	38.5	39.2	40.7	40.3
11.0	31.4	30.0	28.9	29.8	30.4	31.6	32.3	33.8	34.6
12.0		24.9	23.8	24.7	25.2	26.3	27.0	28.4	29.2
14.0		17.6	16.5	17.4	17.8	18.9	19.6	20.9	21.6
16.0		12.7	11.7	12.5	12.9	13.9	14.6	15.8	16.5
18.0			8.2	8.9	9.4	10.3	10.9	12.1	12.8
20.0			4.9	5.9	6.5	7.6	8.2	9.3	10.0
22.0						5.1	6.0	7.2	7.8
24.0								5.3	6.1
26.0									4.3
危険角度 (°)	-	-	-	34	47	49	54	56	57
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

ブームロックピン無し

E4性能 C/W 10t O/R 6.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	89.6	87.8	67.2	73.2	75.9	74.2			
7.0	62.9	61.3	59.8	61.0	59.6	58.1	56.1		
8.0	47.3	45.8	44.5	45.6	46.2	46.8	45.5	45.5	44.6
9.0	37.0	35.7	34.5	35.5	36.0	37.3	37.7	38.0	37.6
10.0	29.9	28.5	27.4	28.3	28.8	30.0	30.8	32.2	32.0
11.0	24.5	23.2	22.1	23.0	23.5	24.7	25.3	26.7	27.5
12.0		19.1	18.1	18.9	19.4	20.5	21.2	22.5	23.2
14.0		13.2	12.2	13.0	13.5	14.5	15.1	16.4	17.1
16.0		9.2	8.2	9.0	9.4	10.4	11.0	12.2	12.8
18.0			4.6	5.6	6.2	7.4	8.0	9.1	9.8
20.0						4.6	5.5	6.8	7.4
22.0								4.6	5.5
危険角度 (°)	-	-	25	43	52	53	60	60	61
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)

E5性能 C/W 10t O/R 5.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	91.7	90.0	75.6	78.9	77.0				
6.0	60.5	59.0	57.6	58.8	57.7	55.9			
7.0	43.8	42.4	41.2	42.2	42.8	44.0	42.7		
8.0	33.4	32.1	31.0	32.0	32.4	33.6	34.3	34.3	34.3
9.0	26.3	25.1	24.1	24.9	25.4	26.5	27.1	28.5	29.0
10.0	21.2	20.0	19.0	19.8	20.3	21.3	22.0	23.2	23.9
11.0	17.3	16.1	15.2	16.0	16.4	17.4	18.0	19.2	19.9
12.0		13.1	12.2	13.0	13.4	14.3	14.9	16.1	16.7
14.0		8.7	7.8	8.5	8.9	9.8	10.4	11.5	12.1
16.0		5.6	4.2		5.8	6.7	7.2	8.3	8.9
18.0								5.9	6.5
危険角度 (°)	-	-	35	55	56	61	65	65	67
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

ブームロックピン無し

F1性能 C/W 0t O/R 9.2m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	99.2	95.0	67.2	73.2	75.9	75.9			
7.0	82.4	81.2	60.4	67.4	68.7	72.1	72.1		
8.0	69.9	68.6	54.8	62.1	62.3	67.3	69.6	68.7	66.7
9.0	60.1	58.8	50.2	57.4	56.9	58.2	56.5	56.2	55.0
10.0	49.4	47.6	46.0	47.3	48.0	47.8	46.8	47.0	46.3
11.0	39.7	38.0	36.6	37.7	38.4	39.9	39.3	39.9	39.5
12.0		31.0	29.7	30.8	31.4	32.8	33.4	34.2	34.1
14.0		21.5	20.3	21.3	21.8	23.1	23.9	25.4	26.0
16.0		15.4	14.2	15.1	15.6	16.8	17.5	18.9	19.7
18.0			9.7	10.8	11.3	12.4	13.1	14.4	15.2
20.0			6.0	7.0	7.7	9.1	9.9	11.1	11.9
22.0					4.7	6.1	7.0	8.6	9.3
24.0								6.1	7.1
26.0									5.1
危険角度 (°)	-	-	-	34	41	49	54	56	57
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)

F2性能 C/W 0t O/R 8.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	99.2	95.0	67.2	73.2	75.9	75.9			
7.0	82.4	81.2	60.4	67.4	68.7	72.1	72.1		
8.0	69.9	67.0	54.8	62.1	61.3	59.9	57.9	57.3	55.9
9.0	52.0	50.2	48.6	49.9	48.9	48.3	47.1	47.2	46.3
10.0	40.8	39.1	37.7	38.9	39.5	39.8	39.0	39.5	39.1
11.0	33.0	31.4	30.0	31.1	31.7	33.1	32.8	33.5	33.4
12.0		25.6	24.3	25.4	25.9	27.3	27.8	28.7	28.7
14.0		17.6	16.4	17.4	17.9	19.1	19.8	21.3	21.8
16.0		12.4	11.2	12.1	12.6	13.7	14.4	15.8	16.6
18.0			6.8	7.9	8.5	9.9	10.6	11.9	12.6
20.0					5.1	6.5	7.4	8.9	9.7
22.0								6.3	7.3
24.0									5.1
危険角度 (°)	-	-	25	43	47	53	58	59	59
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

boomロックピン無し

F3性能 C/W 0t O/R 7.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	99.2	95.0	67.2	73.2	75.9	75.9			
7.0	67.3	65.4	60.4	63.9	60.5	58.8	56.6		
8.0	48.8	47.2	45.7	47.0	47.2	46.5	45.1	45.1	44.2
9.0	37.4	35.8	34.5	35.6	36.2	37.6	36.8	37.2	36.7
10.0	29.6	28.1	26.9	27.9	28.5	29.7	30.4	31.1	31.0
11.0	23.9	22.5	21.3	22.3	22.8	24.0	24.8	26.2	26.3
12.0		18.2	17.1	18.0	18.5	19.7	20.4	21.8	22.6
14.0		12.2	11.2	12.0	12.5	13.6	14.2	15.5	16.2
16.0		8.3	7.0	8.0	8.4	9.4	10.1	11.3	12.0
18.0					5.0	6.4	7.1	8.2	8.9
20.0									6.6
危険角度 (°)	-	-	35	49	52	57	63	65	65
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)

F4性能 C/W 0t O/R 6.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	102.0	95.0	80.7	80.7					
5.0	102.0	95.0	75.6	78.9	78.9				
6.0	71.2	69.3	66.9	63.3	59.6	57.5			
7.0	49.3	47.7	46.2	47.4	45.2	44.3	42.9		
8.0	36.5	35.0	33.7	34.8	35.3	35.1	34.2	34.2	34.1
9.0	28.1	26.8	25.9	26.6	27.1	28.2	27.8	28.4	28.3
10.0	22.3	20.9	19.8	20.7	21.2	22.4	22.8	23.7	23.7
11.0	17.9	16.6	15.5	16.4	16.9	18.0	18.7	19.8	20.0
12.0		13.2	12.2	13.1	13.5	14.6	15.3	16.6	17.0
14.0		8.5	7.3	8.3	8.7	9.7	10.4	11.6	12.2
16.0								8.1	8.8
危険角度 (°)	-	20	45	55	60	65	67	67	69
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)



13.6m — 50.0m

ブームロックピン無し

F5性能 C/W 0t O/R 5.4m ブーム

作業半径 (m)	13.6mブーム	18.15mブーム	22.7mブーム	27.25mブーム	31.8mブーム	36.35mブーム	40.9mブーム	45.45mブーム	50.0mブーム
2.5	102.0								
3.0	102.0	95.0							
3.5	102.0	95.0							
4.0	102.0	95.0	83.0						
4.5	95.2	93.1	80.7	75.5					
5.0	72.0	70.2	66.9	62.7	58.5				
6.0	46.7	45.3	43.9	45.0	42.9	41.8			
7.0	33.2	31.9	30.7	31.7	32.2	32.2	31.3		
8.0	24.8	23.6	22.5	23.4	23.9	25.0	24.8	24.8	24.8
9.0	19.1	17.9	16.9	17.7	18.2	19.3	19.9	20.7	20.8
10.0	15.0	13.8	12.8	13.6	14.1	15.1	15.7	17.0	17.2
11.0	11.9	10.7	9.7	10.5	10.9	11.9	12.6	13.8	14.3
12.0		8.2	7.3	8.1	8.5	9.5	10.1	11.2	11.8
14.0								7.5	8.0
危険角度 (°)	-	37	53	61	66	68	72	72	73
伸長状態 (伸長割合%)									
ブーム2 (%)	0	-	-	-	-	-	-	-	100
ブーム3 (%)	0	-	-	-	-	-	-	-	100
ブーム4 (%)	0	-	-	-	-	-	-	-	100
ブーム5 (%)	0	-	-	-	-	-	-	-	100
フック種類	200t	200t	83t	83t	83t	83t	83t	83t	83t
フック質量 (t)	2.60	2.60	1.35	1.35	1.35	1.35	1.35	1.35	1.35
フック掛数	19	14	7	7	7	7	7	7	6

(単位 : ton)




ブーム (重荷重装置) 作業範囲図

AA性能 C/W 100t O/R 8.4m C/S使用 ブーム (重荷重装置)

作業半径 (m)	13.6mブーム
2.5	400.0
3.0	360.0
3.5	300.0
4.0	270.0
4.5	245.0
5.0	225.0
6.0	195.0
7.0	170.0
8.0	150.0
9.0	133.0
10.0	117.0
11.0	103.0
12.0	85.0
危険角度 (°)	-
伸長状態 (伸長割合%)	
ブーム2 (%)	0
ブーム3 (%)	0
ブーム4 (%)	0
ブーム5 (%)	0
フック種類	400t
フック質量 (t)	9.20
掛数	38

(単位 : ton)

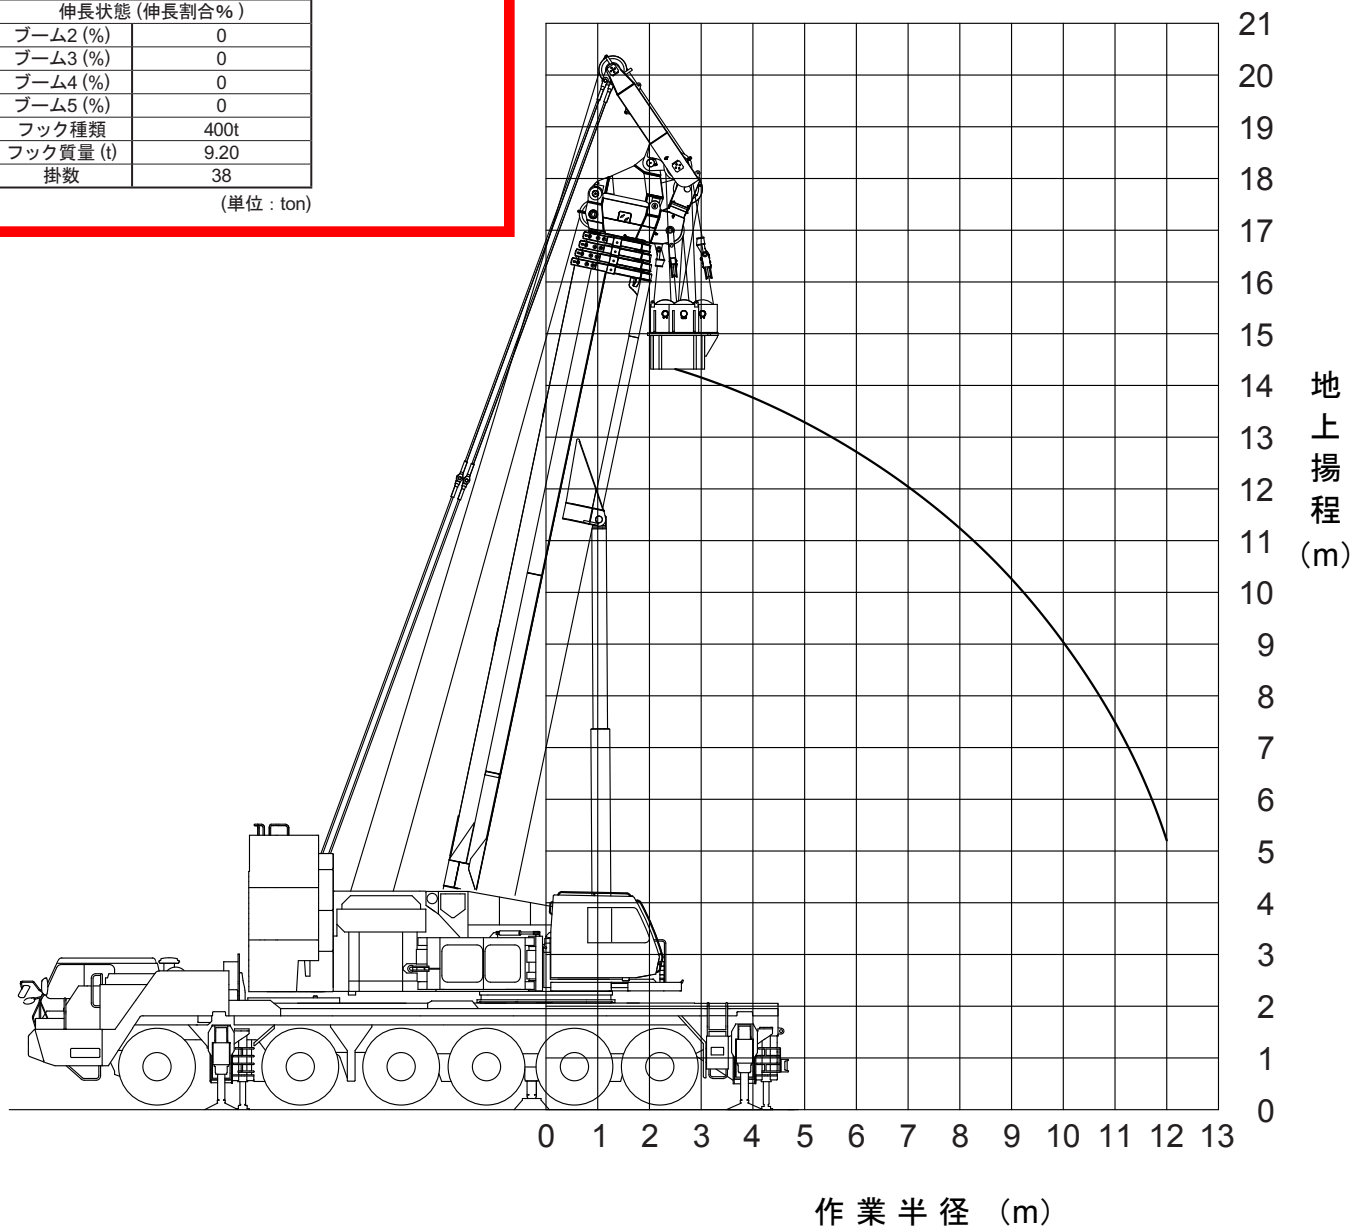

注) 本図は、ブームのたわみを含んでいません。



10m — 31m

スーパーラフティングブーム【13.6mブーム時】

SA性能 13.6mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0°	15°	30°	45°	60°
荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
3.0	48.0				
4.0	48.0				
5.0	48.0	48.0			
6.0	48.0	48.0			
7.0	48.0	45.9			
8.0	48.0	43.0	39.0		
9.0	44.1	40.4	37.3	34.0	
10.0	40.7	38.2	35.7	33.1	30.0
11.0	37.7	36.1	34.3	32.2	29.6
12.0	35.2	34.3	33.1	31.5	29.3
14.0	30.9	31.2	31.0	30.2	28.9
16.0	27.5	28.7	29.3	28.4	28.8
18.0	24.7	26.7	27.2	27.0	
20.0	22.5	25.1	25.6		
22.0	20.7	24.0			
24.0	19.4				
危険角度 (°)	-	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SA性能 13.6mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0°	15°	30°	45°	60°
荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	17.5	16.9	14.5		
18.0	15.4	15.6	13.6	11.5	
20.0	13.7	14.2	12.8	11.1	
22.0	12.3	13.1	12.1	10.7	10.0
24.0	11.1	12.0	11.5	10.3	10.0
26.0	10.1	11.2	11.0	10.1	10.0
28.0	9.2	10.4	10.6	10.0	10.0
30.0	8.5	9.8	10.3	10.0	
32.0	7.8	9.2	9.9		
34.0	7.2	8.8	9.6		
36.0	6.8	8.2			
危険角度 (°)	-	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SA性能 13.6mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0°	15°	30°	45°	60°
荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
4.0	18.0				
5.0	18.0				
6.0	18.0				
7.0	18.0	18.0			
8.0	18.0	18.0			
9.0	18.0	18.0			
10.0	18.0	18.0			
11.0	18.0	18.0	18.0		
12.0	18.0	18.0	18.0		
14.0	18.0	18.0	18.0	18.0	
16.0	18.0	18.0	18.0	18.0	18.0
18.0	18.0	18.0	18.0	18.0	18.0
20.0	17.3	18.0	18.0	18.0	18.0
22.0	15.7	17.2	17.8	17.4	
24.0	14.3	16.1	16.8	16.8	
26.0	13.2	15.3	16.0		
28.0	12.2	14.3			
危険角度 (°)	-	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SA性能 13.6mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0°	15°	30°	45°	60°
荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
5.0	15.0				
6.0	15.0				
7.0	15.0				
8.0	15.0				
9.0	15.0				
10.0	15.0				
11.0	15.0				
12.0	15.0	15.0			
14.0	15.0	15.0			
16.0	15.0	14.1			
18.0	14.6	12.9	11.0		
20.0	12.9	12.0	10.4		
22.0	11.6	11.1	9.8		
24.0	10.4	10.4	9.3	8.4	
26.0	9.5	9.8	8.8	8.1	7.3
28.0	8.6	9.2	8.4	7.8	7.3
30.0	7.9	8.7	8.1	7.6	7.3
32.0	7.2	8.3	7.8	7.4	7.3
34.0	6.6	7.8	7.5	7.3	
36.0	6.1	7.4	7.3	7.3	
38.0	5.7	7.0	7.3		
40.0	5.3	6.6			
危険角度 (°)	-	15	30	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SA性能 13.6mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0°	15°	30°	45°	60°
荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
4.0	18.0				
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0	18.0			
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0	18.0		
16.0	18.0	18.0	18.0		
18.0	16.9	17.3	17.0	16.0	
20.0	15.1	15.9	15.9	15.2	14.0
22.0	13.6	14.7	15.0	14.4	13.5
24.0	12.4	13.6	14.2	13.6	13.5
26.0	11.3	12.7	13.4	13.1	
28.0	10.4	12.0	12.7	12.7	
30.0	9.6	11.4	12.1		
32.0	8.9	10.8			
危険角度 (°)	-	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SA性能 13.6mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0°	15°	30°	45°	60°
荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
6.0	12.0				
7.0	12.0				
8.0	12.0				
9.0	12.0				
10.0	12.0				
11.0	12.0				
12.0	12.0				
14.0	12.0	12.0			
16.0	12.0	12.0			
18.0	12.0	11.0			
20.0	12.0	10.2	8.8		
22.0	10.9	9.5	8.3		
24.0	9.8	8.8	7.8		
26.0	8.9	8.3	7.4	6.7	
28.0	8.0	7.8	7.0	6.4	
30.0	7.3	7.3	6.7	6.1	5.5
32.0	6.7	7.0	6.4	5.9	5.5
34.0	6.1	6.6	6.1	5.8	5.5
36.0	5.6	6.3	5.9	5.6	5.5
38.0	5.2	6.1	5.7	5.5	
40.0	4.8	5.8	5.6	5.5	
42.0	4.5	5.6	5.5		
44.0	4.2	5.3			
危険角度 (°)	-	15	30	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【13.6mブーム時】

SB性能 13.6mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
3.0	48.0				
4.0	48.0				
5.0	48.0	48.0			
6.0	48.0	48.0			
7.0	48.0	45.9			
8.0	48.0	43.0	39.0		
9.0	44.1	40.4	37.3	34.0	
10.0	40.7	38.2	35.7	33.1	30.0
11.0	37.7	36.1	34.3	32.2	29.6
12.0	35.2	34.3	33.1	31.5	29.3
14.0	30.9	31.2	31.0	30.2	28.9
16.0	27.5	28.7	29.3	28.4	28.8
18.0	24.7	26.7	27.2	27.0	
20.0	22.5	25.1	25.6		
22.0	20.7	24.0			
24.0	19.4				
危険角度 (°)	-	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SB性能 13.6mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	17.5	16.9	14.5		
18.0	15.4	15.6	13.6	11.5	
20.0	13.7	14.2	12.8	11.1	
22.0	12.3	13.1	12.1	10.7	10.0
24.0	11.1	12.0	11.5	10.3	10.0
26.0	10.1	11.2	11.0	10.1	10.0
28.0	9.2	10.4	10.6	10.0	10.0
30.0	8.5	9.8	10.3	10.0	
32.0	7.8	9.2	9.9		
34.0	7.2	8.8	9.6		
36.0	6.8	8.2			
危険角度 (°)	-	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SB性能 13.6mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
4.0	18.0				
5.0	18.0				
6.0	18.0				
7.0	18.0	18.0			
8.0	18.0	18.0			
9.0	18.0	18.0			
10.0	18.0	18.0			
11.0	18.0	18.0	18.0		
12.0	18.0	18.0	18.0		
14.0	18.0	18.0	18.0	18.0	
16.0	18.0	18.0	18.0	18.0	18.0
18.0	18.0	18.0	18.0	18.0	18.0
20.0	17.3	18.0	18.0	18.0	18.0
22.0	15.7	17.2	17.8	17.4	
24.0	14.3	16.1	16.8	16.8	
26.0	13.2	15.3	16.0		
28.0	12.2	14.3			
危険角度 (°)	-	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SB性能 13.6mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	15.0				
6.0	15.0				
7.0	15.0				
8.0	15.0				
9.0	15.0				
10.0	15.0				
11.0	15.0				
12.0	15.0	15.0			
14.0	15.0	15.0			
16.0	15.0	14.1			
18.0	14.6	12.9	11.0		
20.0	12.9	12.0	10.4		
22.0	11.6	11.1	9.8		
24.0	10.4	10.4	9.3	8.4	
26.0	9.5	9.8	8.8	8.1	7.3
28.0	8.6	9.2	8.4	7.8	7.3
30.0	7.9	8.7	8.1	7.6	7.3
32.0	7.2	8.3	7.8	7.4	7.3
34.0	6.6	7.8	7.5	7.3	
36.0	6.1	7.4	7.3	7.3	
38.0	5.7	7.0	7.3		
40.0	5.3	6.6			
危険角度 (°)	-	15	30	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SB性能 13.6mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
4.0	18.0				
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0	18.0			
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0	18.0		
16.0	18.0	18.0	18.0		
18.0	16.9	17.3	17.0	16.0	
20.0	15.1	15.9	15.9	15.2	14.0
22.0	13.6	14.7	15.0	14.4	13.5
24.0	12.4	13.6	14.2	13.6	13.5
26.0	11.3	12.7	13.4	13.1	
28.0	10.4	12.0	12.7	12.7	
30.0	9.6	11.4	12.1		
32.0	8.9	10.8			
危険角度 (°)	-	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SB性能 13.6mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
6.0	12.0				
7.0	12.0				
8.0	12.0				
9.0	12.0				
10.0	12.0				
11.0	12.0				
12.0	12.0				
14.0	12.0	12.0			
16.0	12.0	12.0			
18.0	12.0	11.0			
20.0	12.0	10.2	8.8		
22.0	10.9	9.5	8.3		
24.0	9.8	8.8	7.8		
26.0	8.9	8.3	7.4	6.7	
28.0	8.0	7.8	7.0	6.4	
30.0	7.3	7.3	6.7	6.1	5.5
32.0	6.7	7.0	6.4	5.9	5.5
34.0	6.1	6.6	6.1	5.8	5.5
36.0	5.6	6.3	5.9	5.6	5.5
38.0	5.2	6.1	5.7	5.5	
40.0	4.8	5.8	5.6	5.5	
42.0	4.5	5.6	5.5		
44.0	4.2	5.3			
危険角度 (°)	-	15	30	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフィングブーム【13.6mブーム時】

SC性能 13.6mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
3.0	48.0				
4.0	48.0				
5.0	48.0	48.0			
6.0	48.0	48.0			
7.0	48.0	45.9			
8.0	48.0	43.0	39.0		
9.0	44.1	40.4	37.3	34.0	
10.0	40.7	38.2	35.7	33.1	30.0
11.0	37.7	36.1	34.3	32.2	29.6
12.0	35.2	34.3	33.1	31.5	29.3
14.0	30.9	31.2	31.0	30.2	28.9
16.0	27.5	28.7	29.3	28.4	28.8
18.0	24.7	26.7	27.2	27.0	
20.0	22.5	25.1	25.6		
22.0	20.7	23.2			
24.0	19.4				
危険角度 (°)	-	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SC性能 13.6mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	17.5	16.9	14.5		
18.0	15.4	15.6	13.6	11.5	
20.0	13.7	14.2	12.8	11.1	
22.0	12.3	13.1	12.1	10.7	10.0
24.0	11.1	12.0	11.5	10.3	10.0
26.0	10.1	11.2	11.0	10.1	10.0
28.0	9.2	10.4	10.6	10.0	10.0
30.0	8.5	9.8	10.3	10.0	
32.0	7.8	9.2	9.9		
34.0	7.2	8.8	9.6		
36.0	6.8	8.2			
危険角度 (°)	-	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SC性能 13.6mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
4.0	18.0				
5.0	18.0				
6.0	18.0				
7.0	18.0	18.0			
8.0	18.0	18.0			
9.0	18.0	18.0			
10.0	18.0	18.0			
11.0	18.0	18.0	18.0		
12.0	18.0	18.0	18.0		
14.0	18.0	18.0	18.0	18.0	
16.0	18.0	18.0	18.0	18.0	18.0
18.0	18.0	18.0	18.0	18.0	18.0
20.0	17.3	18.0	18.0	18.0	18.0
22.0	15.7	17.2	17.8	17.4	
24.0	14.3	16.1	16.8	16.8	
26.0	13.2	15.3	16.0		
28.0	12.2	14.3			
危険角度 (°)	-	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SC性能 13.6mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	15.0				
6.0	15.0				
7.0	15.0				
8.0	15.0				
9.0	15.0				
10.0	15.0				
11.0	15.0				
12.0	15.0	15.0			
14.0	15.0	15.0			
16.0	15.0	14.1			
18.0	14.6	12.9	11.0		
20.0	12.9	12.0	10.4		
22.0	11.6	11.1	9.8		
24.0	10.4	10.4	9.3	8.4	
26.0	9.5	9.8	8.8	8.1	7.3
28.0	8.6	9.2	8.4	7.8	7.3
30.0	7.9	8.7	8.1	7.6	7.3
32.0	7.2	8.3	7.8	7.4	7.3
34.0	6.6	7.8	7.5	7.3	
36.0	6.1	7.4	7.3	7.3	
38.0	5.7	7.0	7.3		
40.0	5.3	6.6			
危険角度 (°)	-	15	30	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SC性能 13.6mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
4.0	18.0				
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0	18.0			
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0	18.0		
16.0	18.0	18.0	18.0		
18.0	16.9	17.3	17.0	16.0	
20.0	15.1	15.9	15.9	15.2	14.0
22.0	13.6	14.7	15.0	14.4	13.5
24.0	12.4	13.6	14.2	13.6	13.5
26.0	11.3	12.7	13.4	13.1	
28.0	10.4	12.0	12.7	12.7	
30.0	9.6	11.4	12.1		
32.0	8.9	10.8			
危険角度 (°)	-	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SC性能 13.6mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
6.0	12.0				
7.0	12.0				
8.0	12.0				
9.0	12.0				
10.0	12.0				
11.0	12.0				
12.0	12.0				
14.0	12.0	12.0			
16.0	12.0	12.0			
18.0	12.0	11.0			
20.0	12.0	10.2	8.8		
22.0	10.9	9.5	8.3		
24.0	9.8	8.8	7.8		
26.0	8.9	8.3	7.4	6.7	
28.0	8.0	7.8	7.0	6.4	
30.0	7.3	7.3	6.7	6.1	5.5
32.0	6.7	7.0	6.4	5.9	5.5
34.0	6.1	6.6	6.1	5.8	5.5
36.0	5.6	6.3	5.9	5.6	5.5
38.0	5.2	6.1	5.7	5.5	
40.0	4.8	5.8	5.6	5.5	
42.0	4.5	5.6	5.5		
44.0	4.2	5.3			
危険角度 (°)	-	15	30	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【13.6mブーム時】

SD性能 13.6mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
3.0	48.0				
4.0	48.0				
5.0	48.0	48.0			
6.0	48.0	48.0			
7.0	48.0	45.9			
8.0	48.0	43.0	39.0		
9.0	44.1	40.4	37.3	34.0	
10.0	40.7	38.2	35.7	33.1	30.0
11.0	37.7	36.1	34.3	32.2	29.6
12.0	35.2	34.3	33.1	31.5	29.3
14.0	30.9	31.2	31.0	30.2	28.9
16.0	27.5	28.7	29.3	28.4	28.8
18.0	24.6	25.6	26.3	26.6	
20.0	20.2	20.8	21.2		
22.0	16.8	17.1			
24.0	14.1				
危険角度 (°)	-	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SD性能 13.6mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	17.5	16.9	14.5		
18.0	15.4	15.6	13.6	11.5	
20.0	13.7	14.2	12.8	11.1	
22.0	12.3	13.1	12.1	10.7	10.0
24.0	11.1	12.0	11.5	10.3	10.0
26.0	10.1	11.2	11.0	10.1	10.0
28.0	9.2	10.4	10.6	10.0	10.0
30.0	8.5	9.8	10.3	10.0	
32.0	7.8	9.2	9.9		
34.0	7.2	8.8	9.6		
36.0	6.8	8.2			
危険角度 (°)	-	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SD性能 13.6mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
4.0	18.0				
5.0	18.0				
6.0	18.0				
7.0	18.0	18.0			
8.0	18.0	18.0			
9.0	18.0	18.0			
10.0	18.0	18.0			
11.0	18.0	18.0	18.0		
12.0	18.0	18.0	18.0		
14.0	18.0	18.0	18.0	18.0	
16.0	18.0	18.0	18.0	18.0	18.0
18.0	18.0	18.0	18.0	18.0	18.0
20.0	17.3	18.0	18.0	18.0	18.0
22.0	15.7	17.2	17.8	17.4	
24.0	14.3	16.1	16.8	16.8	
26.0	13.2	14.0	14.3		
28.0	11.6	11.8			
危険角度 (°)	-	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SD性能 13.6mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	15.0				
6.0	15.0				
7.0	15.0				
8.0	15.0				
9.0	15.0				
10.0	15.0				
11.0	15.0				
12.0	15.0	15.0			
14.0	15.0	15.0			
16.0	15.0	14.1			
18.0	14.6	12.9	11.0		
20.0	12.9	12.0	10.4		
22.0	11.6	11.1	9.8		
24.0	10.4	10.4	9.3	8.4	
26.0	9.5	9.8	8.8	8.1	7.3
28.0	8.6	9.2	8.4	7.8	7.3
30.0	7.9	8.7	8.1	7.6	7.3
32.0	7.2	8.3	7.8	7.4	7.3
34.0	6.6	7.8	7.5	7.3	
36.0	6.1	7.4	7.3	7.3	
38.0	5.7	7.0	7.3		
40.0	5.3	6.6			
危険角度 (°)	-	15	30	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SD性能 13.6mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
4.0	18.0				
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0	18.0			
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0	18.0		
16.0	18.0	18.0	18.0		
18.0	16.9	17.3	17.0	16.0	
20.0	15.1	15.9	15.9	15.2	14.0
22.0	13.6	14.7	15.0	14.4	13.5
24.0	12.4	13.6	14.2	13.6	13.5
26.0	11.3	12.7	13.4	13.1	
28.0	10.4	12.0	12.7	12.7	
30.0	9.6	11.4	11.7		
32.0	8.9	9.8			
危険角度 (°)	-	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SD性能 13.6mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
6.0	12.0				
7.0	12.0				
8.0	12.0				
9.0	12.0				
10.0	12.0				
11.0	12.0				
12.0	12.0				
14.0	12.0	12.0			
16.0	12.0	12.0			
18.0	12.0	11.0			
20.0	12.0	10.2	8.8		
22.0	10.9	9.5	8.3		
24.0	9.8	8.8	7.8		
26.0	8.9	8.3	7.4	6.7	
28.0	8.0	7.8	7.0	6.4	
30.0	7.3	7.3	6.7	6.1	5.5
32.0	6.7	7.0	6.4	5.9	5.5
34.0	6.1	6.6	6.1	5.8	5.5
36.0	5.6	6.3	5.9	5.6	5.5
38.0	5.2	6.1	5.7	5.5	
40.0	4.8	5.8	5.6	5.5	
42.0	4.5	5.6	5.5		
44.0	4.2	5.3			
危険角度 (°)	-	15	30	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【13.6mブーム時】

SE性能 13.6mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
3.0	48.0				
4.0	48.0				
5.0	48.0	48.0			
6.0	48.0	48.0			
7.0	48.0	45.9			
8.0	48.0	43.0	39.0		
9.0	44.1	40.4	37.3	34.0	
10.0	40.7	38.2	35.7	33.1	30.0
11.0	37.7	36.1	34.3	32.2	29.6
12.0	35.2	34.3	33.1	31.5	29.3
14.0	30.9	31.2	31.0	30.2	28.9
16.0	24.7	26.0	27.1	27.8	27.9
18.0	19.2	20.2	21.0	21.3	
20.0	15.2	15.9	16.3		
22.0	12.2	12.5			
24.0	9.8				
危険角度 (°)	-	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SE性能 13.6mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	17.5	16.9	14.5		
18.0	15.4	15.6	13.6	11.5	
20.0	13.7	14.2	12.8	11.1	
22.0	12.3	13.1	12.1	10.7	10.0
24.0	11.1	12.0	11.5	10.3	10.0
26.0	10.1	11.2	11.0	10.1	10.0
28.0	9.2	10.4	10.6	10.0	10.0
30.0	8.4	9.2	9.9	10.0	
32.0	7.2	7.8	8.4		
34.0	6.1	6.6	6.9		
36.0	5.3	5.5			
危険角度 (°)	-	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SE性能 13.6mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
4.0	18.0				
5.0	18.0				
6.0	18.0				
7.0	18.0	18.0			
8.0	18.0	18.0			
9.0	18.0	18.0			
10.0	18.0	18.0			
11.0	18.0	18.0	18.0		
12.0	18.0	18.0	18.0		
14.0	18.0	18.0	18.0	18.0	
16.0	18.0	18.0	18.0	18.0	18.0
18.0	18.0	18.0	18.0	18.0	18.0
20.0	17.2	18.0	18.0	18.0	18.0
22.0	14.1	15.1	16.0	16.6	
24.0	11.6	12.4	13.0	13.2	
26.0	9.6	10.1	10.4		
28.0	8.0	8.2			
危険角度 (°)	-	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SE性能 13.6mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	15.0				
6.0	15.0				
7.0	15.0				
8.0	15.0				
9.0	15.0				
10.0	15.0				
11.0	15.0				
12.0	15.0	15.0			
14.0	15.0	15.0			
16.0	15.0	14.1			
18.0	14.6	12.9	11.0		
20.0	12.9	12.0	10.4		
22.0	11.6	11.1	9.8		
24.0	10.4	10.4	9.3	8.4	
26.0	9.5	9.8	8.8	8.1	7.3
28.0	8.6	9.2	8.4	7.8	7.3
30.0	7.9	8.7	8.1	7.6	7.3
32.0	7.2	8.3	7.8	7.4	7.3
34.0	6.6	7.6	7.5	7.3	
36.0	5.9	6.5	7.0	7.3	
38.0	5.1	5.5	5.9		
40.0	4.3	4.6			
危険角度 (°)	-	15	30	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SE性能 13.6mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
4.0	18.0				
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0	18.0			
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0	18.0		
16.0	18.0	18.0	18.0		
18.0	16.9	17.3	17.0	16.0	
20.0	15.1	15.9	15.9	15.2	14.0
22.0	13.6	14.7	15.0	14.4	13.5
24.0	12.4	13.6	14.2	13.6	13.5
26.0	10.7	11.6	12.4	13.0	
28.0	9.0	9.7	10.3	10.6	
30.0	7.6	8.1	8.4		
32.0	6.4	6.7			
危険角度 (°)	-	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SE性能 13.6mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
6.0	12.0				
7.0	12.0				
8.0	12.0				
9.0	12.0				
10.0	12.0				
11.0	12.0				
12.0	12.0				
14.0	12.0	12.0			
16.0	12.0	12.0			
18.0	12.0	11.0			
20.0	12.0	10.2	8.8		
22.0	10.9	9.5	8.3		
24.0	9.8	8.8	7.8		
26.0	8.9	8.3	7.4	6.7	
28.0	8.0	7.8	7.0	6.4	
30.0	7.3	7.3	6.7	6.1	5.5
32.0	6.7	7.0	6.4	5.9	5.5
34.0	6.1	6.6	6.1	5.8	5.5
36.0	5.6	6.3	5.9	5.6	5.5
38.0	5.2	6.1	5.7	5.5	
40.0	4.8	5.4	5.6	5.5	
42.0	4.2	4.7	5.0		
44.0	3.4	3.7			
危険角度 (°)	-	15	30	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【13.6mブーム時】

SF性能 13.6mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
3.0	48.0				
4.0	48.0				
5.0	48.0	48.0			
6.0	48.0	48.0			
7.0	48.0	45.9			
8.0	48.0	43.0	39.0		
9.0	44.1	40.4	37.3	34.0	
10.0	40.7	38.2	35.7	33.1	30.0
11.0	37.7	36.1	34.3	32.2	29.6
12.0	33.9	34.3	33.1	31.5	29.3
14.0	24.3	26.0	27.5	28.6	28.9
16.0	18.1	19.4	20.4	21.1	21.2
18.0	13.8	14.7	15.4	15.7	
20.0	10.6	11.2	11.6		
22.0	8.1	8.5			
24.0	6.3				
危険角度 (°)	-	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SF性能 13.6mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	17.5	16.9	14.5		
18.0	15.4	15.6	13.6	11.5	
20.0	13.7	14.2	12.8	11.1	
22.0	11.8	13.1	12.1	10.7	10.0
24.0	9.7	11.1	11.5	10.3	10.0
26.0	8.1	9.2	10.3	10.1	10.0
28.0	6.7	7.7	8.6	9.3	9.8
30.0	5.6	6.3	7.1	7.6	
32.0	4.6	5.2	5.8		
34.0		4.2	4.6		
危険角度 (°)	28	28	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SF性能 13.6mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
4.0	18.0				
5.0	18.0				
6.0	18.0				
7.0	18.0	18.0			
8.0	18.0	18.0			
9.0	18.0	18.0			
10.0	18.0	18.0			
11.0	18.0	18.0	18.0		
12.0	18.0	18.0	18.0		
14.0	18.0	18.0	18.0	18.0	
16.0	18.0	18.0	18.0	18.0	18.0
18.0	15.7	17.2	18.0	18.0	18.0
20.0	12.4	13.6	14.8	15.6	16.0
22.0	9.9	10.9	11.7	12.3	
24.0	7.9	8.6	9.2	9.4	
26.0	6.3	6.8	7.1		
28.0	5.0	5.3			
危険角度 (°)		15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SF性能 13.6mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	15.0				
6.0	15.0				
7.0	15.0				
8.0	15.0				
9.0	15.0				
10.0	15.0				
11.0	15.0				
12.0	15.0	15.0			
14.0	15.0	15.0			
16.0	15.0	14.1			
18.0	14.6	12.9	11.0		
20.0	12.9	12.0	10.4		
22.0	11.6	11.1	9.8		
24.0	10.4	10.4	9.3	8.4	
26.0	8.9	9.8	8.8	8.1	7.3
28.0	7.5	8.6	8.4	7.8	7.3
30.0	6.3	7.3	8.1	7.6	7.3
32.0	5.3	6.1	7.0	7.4	7.3
34.0	4.5	5.1	5.8	6.3	
36.0	3.7	4.3	4.8	5.0	
38.0		3.4	3.8		
危険角度 (°)	28	28	30	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SF性能 13.6mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
4.0	18.0				
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0	18.0			
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0	18.0		
16.0	18.0	18.0	18.0		
18.0	16.8	17.3	17.0	16.0	
20.0	13.5	15.1	15.9	15.2	14.0
22.0	11.0	12.3	13.5	14.4	13.5
24.0	8.9	10.0	11.0	11.8	12.2
26.0	7.3	8.2	8.9	9.5	
28.0	6.0	6.6	7.2	7.5	
30.0	4.9	5.3	5.6		
32.0		4.1			
危険角度 (°)	21	21	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SF性能 13.6mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
6.0	12.0				
7.0	12.0				
8.0	12.0				
9.0	12.0				
10.0	12.0				
11.0	12.0				
12.0	12.0				
14.0	12.0	12.0			
16.0	12.0	12.0			
18.0	12.0	11.0			
20.0	12.0	10.2	8.8		
22.0	10.9	9.5	8.3		
24.0	9.8	8.8	7.8		
26.0	8.9	8.3	7.4	6.7	
28.0	8.0	7.8	7.0	6.4	
30.0	6.8	7.3	6.7	6.1	5.5
32.0	5.8	6.8	6.4	5.9	5.5
34.0	5.0	5.8	6.1	5.8	5.5
36.0	4.2	4.9	5.7	5.6	5.5
38.0	3.5	4.2	4.8	5.3	
40.0	2.7	3.5	3.9	4.2	
42.0			3.1		
危険角度 (°)	28	35	35	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフィングブーム【22.7mブーム時】

SA性能 22.7mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
4.0	48.0				
5.0	48.0				
6.0	48.0				
7.0	48.0	48.0			
8.0	48.0	47.6			
9.0	48.0	45.2	39.0		
10.0	48.0	43.1	38.1		
11.0	47.7	41.2	36.9	33.3	30.0
12.0	44.7	39.4	35.8	32.8	29.7
14.0	39.7	36.3	33.8	31.6	29.2
16.0	35.7	33.7	32.1	30.6	28.9
18.0	32.3	31.5	30.7	29.6	28.8
20.0	29.5	29.6	29.5	28.4	28.8
22.0	27.2	28.0	28.2	27.5	
24.0	25.2	26.6	26.9	26.7	
26.0	23.4	25.5	25.8		
28.0	21.9	24.6	24.9		
30.0	20.7	23.8			
32.0	17.3	18.0			
危険角度 (°)	5	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SA性能 22.7mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0			
18.0	18.0	17.0	14.0		
20.0	17.1	15.9	13.4		
22.0	15.5	14.9	12.8	11.3	
24.0	14.0	13.9	12.2	10.9	10.0
26.0	12.8	13.0	11.8	10.6	10.0
28.0	11.8	12.2	11.3	10.4	10.0
30.0	10.9	11.4	11.0	10.2	10.0
32.0	10.1	10.8	10.7	10.0	10.0
34.0	9.3	10.2	10.4	9.9	
36.0	8.7	9.7	10.2	9.9	
38.0	8.1	9.3	9.9	9.9	
40.0	7.6	8.9	9.6		
42.0	7.2	8.6	9.4		
44.0	6.8	8.2			
46.0	4.9				
危険角度 (°)	5	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SA性能 22.7mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0	18.0			
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0	18.0		
14.0	18.0	18.0	18.0		
16.0	18.0	18.0	18.0	18.0	18.0
18.0	18.0	18.0	18.0	18.0	18.0
20.0	18.0	18.0	18.0	18.0	18.0
22.0	18.0	18.0	18.0	18.0	18.0
24.0	18.0	18.0	18.0	18.0	18.0
26.0	17.2	18.0	18.0	17.5	
28.0	16.0	17.1	17.4	17.0	
30.0	14.9	16.3	16.7	16.7	
32.0	13.9	15.6	16.2		
34.0	13.1	15.1	15.8		
36.0	12.4	14.6			
38.0	7.3				
危険角度 (°)	5	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SA性能 22.7mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
7.0	15.0				
8.0	15.0				
9.0	15.0				
10.0	15.0				
11.0	15.0				
12.0	15.0				
14.0	15.0	15.0			
16.0	15.0	15.0			
18.0	15.0	14.0			
20.0	15.0	13.0	10.8		
22.0	14.3	12.2	10.2		
24.0	13.0	11.5	9.8		
26.0	11.9	10.9	9.3	8.3	
28.0	10.9	10.3	9.0	8.0	7.3
30.0	10.0	9.8	8.6	7.8	7.3
32.0	9.2	9.3	8.3	7.6	7.3
34.0	8.5	8.9	8.0	7.5	7.3
36.0	7.9	8.6	7.8	7.3	7.3
38.0	7.4	8.3	7.6	7.3	
40.0	6.9	7.9	7.4	7.2	
42.0	6.4	7.5	7.3	7.2	
44.0	6.1	7.2	7.3		
46.0	5.7	6.9	7.3		
48.0	5.4	6.6			
50.0	4.0				
危険角度 (°)	5	15	30	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SA性能 22.7mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0	18.0		
18.0	18.0	18.0	18.0	16.0	
20.0	18.0	18.0	17.2	15.9	14.0
22.0	17.4	17.1	16.3	15.3	14.0
24.0	15.9	15.9	15.6	14.6	13.7
26.0	14.6	15.0	14.9	14.0	13.6
28.0	13.5	14.1	14.2	13.5	13.4
30.0	12.5	13.3	13.7	13.1	
32.0	11.6	12.7	13.1	12.8	
34.0	10.8	12.1	12.6	12.6	
36.0	10.1	11.6	12.2		
38.0	9.5	11.2	12.0		
40.0	9.0	10.7			
42.0	5.9				
危険角度 (°)	5	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SA性能 22.7mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
7.0	12.0				
8.0	12.0				
9.0	12.0				
10.0	12.0				
11.0	12.0				
12.0	12.0				
14.0	12.0				
16.0	12.0	12.0			
18.0	12.0	11.8			
20.0	12.0	11.0			
22.0	12.0	10.2			
24.0	11.9	9.6	8.1		
26.0	11.0	9.1	7.7		
28.0	10.0	8.6	7.4	6.5	
30.0	9.2	8.1	7.0	6.3	
32.0	8.4	7.7	6.8	6.1	5.4
34.0	7.8	7.4	6.5	5.9	5.4
36.0	7.2	7.1	6.3	5.8	5.4
38.0	6.7	6.8	6.1	5.7	5.4
40.0	6.2	6.5	5.9	5.5	5.4
42.0	5.8	6.3	5.8	5.5	
44.0	5.4	6.1	5.7	5.4	
46.0	5.1	5.9	5.5	5.4	
48.0	4.8	5.7	5.5		
50.0	4.5	5.6	5.5		
52.0	4.2	5.4			
54.0	3.3				
危険角度 (°)	5	15	30	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【22.7mブーム時】

SB性能 22.7mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
4.0	48.0				
5.0	48.0				
6.0	48.0				
7.0	48.0	48.0			
8.0	48.0	47.6			
9.0	48.0	45.2	39.0		
10.0	48.0	43.1	38.1		
11.0	47.7	41.2	36.9	33.3	30.0
12.0	44.7	39.4	35.8	32.8	29.7
14.0	39.7	36.3	33.8	31.6	29.2
16.0	35.7	33.7	32.1	30.6	28.9
18.0	32.3	31.5	30.7	29.6	28.8
20.0	29.5	29.6	29.5	28.4	28.8
22.0	27.2	28.0	28.2	27.5	
24.0	23.0	23.8	24.3	24.6	
26.0	19.6	20.2	20.6		
28.0	16.7	17.2	17.5		
30.0	14.4	14.7			
32.0	12.4	12.4			
危険角度 (°)	5	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SB性能 22.7mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0			
18.0	18.0	17.0	14.0		
20.0	17.1	15.9	13.4		
22.0	15.5	14.9	12.8	11.3	
24.0	14.0	13.9	12.2	10.9	10.0
26.0	12.8	13.0	11.8	10.6	10.0
28.0	11.8	12.2	11.3	10.4	10.0
30.0	10.9	11.4	11.0	10.2	10.0
32.0	10.1	10.8	10.7	10.0	10.0
34.0	9.3	10.2	10.4	9.9	
36.0	8.7	9.7	10.2	9.9	
38.0	8.1	9.3	9.9	9.9	
40.0	7.6	8.9	9.6		
42.0	7.2	8.6	9.4		
44.0	6.8	8.2			
46.0	4.9				
危険角度 (°)	5	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SB性能 22.7mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0	18.0			
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0	18.0		
14.0	18.0	18.0	18.0		
16.0	18.0	18.0	18.0	18.0	18.0
18.0	18.0	18.0	18.0	18.0	18.0
20.0	18.0	18.0	18.0	18.0	18.0
22.0	18.0	18.0	18.0	18.0	18.0
24.0	18.0	18.0	18.0	18.0	18.0
26.0	17.2	18.0	18.0	17.5	
28.0	16.0	17.1	17.4	17.0	
30.0	14.9	16.3	16.7	16.7	
32.0	13.9	14.6	15.0		
34.0	12.2	12.7	12.9		
36.0	10.7	11.0			
38.0	7.3				
危険角度 (°)	5	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SB性能 22.7mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
7.0	15.0				
8.0	15.0				
9.0	15.0				
10.0	15.0				
11.0	15.0				
12.0	15.0				
14.0	15.0	15.0			
16.0	15.0	15.0			
18.0	15.0	14.0			
20.0	15.0	13.0	10.8		
22.0	14.3	12.2	10.2		
24.0	13.0	11.5	9.8		
26.0	11.9	10.9	9.3	8.3	
28.0	10.9	10.3	9.0	8.0	7.3
30.0	10.0	9.8	8.6	7.8	7.3
32.0	9.2	9.3	8.3	7.6	7.3
34.0	8.5	8.9	8.0	7.5	7.3
36.0	7.9	8.6	7.8	7.3	7.3
38.0	7.4	8.3	7.6	7.3	
40.0	6.9	7.9	7.4	7.2	
42.0	6.4	7.5	7.3	7.2	
44.0	6.1	7.2	7.3		
46.0	5.7	6.9	7.3		
48.0	5.4	6.6			
50.0	4.0				
危険角度 (°)	5	15	30	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SB性能 22.7mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0	18.0		
18.0	18.0	18.0	18.0	16.0	
20.0	18.0	18.0	17.2	15.9	14.0
22.0	17.4	17.1	16.3	15.3	14.0
24.0	15.9	15.9	15.6	14.6	13.7
26.0	14.6	15.0	14.9	14.0	13.6
28.0	13.5	14.1	14.2	13.5	13.4
30.0	12.5	13.3	13.7	13.1	
32.0	11.6	12.7	13.1	12.8	
34.0	10.8	12.1	12.6	12.6	
36.0	10.1	11.6	12.2		
38.0	9.5	10.8	11.0		
40.0	9.0	9.4			
42.0	5.9				
危険角度 (°)	5	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SB性能 22.7mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
7.0	12.0				
8.0	12.0				
9.0	12.0				
10.0	12.0				
11.0	12.0				
12.0	12.0				
14.0	12.0				
16.0	12.0	12.0			
18.0	12.0	11.8			
20.0	12.0	11.0			
22.0	12.0	10.2			
24.0	11.9	9.6	8.1		
26.0	11.0	9.1	7.7		
28.0	10.0	8.6	7.4	6.5	
30.0	9.2	8.1	7.0	6.3	
32.0	8.4	7.7	6.8	6.1	5.4
34.0	7.8	7.4	6.5	5.9	5.4
36.0	7.2	7.1	6.3	5.8	5.4
38.0	6.7	6.8	6.1	5.7	5.4
40.0	6.2	6.5	5.9	5.5	5.4
42.0	5.8	6.3	5.8	5.5	
44.0	5.4	6.1	5.7	5.4	
46.0	5.1	5.9	5.5	5.4	
48.0	4.8	5.7	5.5		
50.0	4.5	5.6	5.5		
52.0	4.2	5.4			
54.0	3.3				
危険角度 (°)	5	15	30	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフィングブーム【22.7mブーム時】

SC性能 22.7mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
4.0	48.0				
5.0	48.0				
6.0	48.0				
7.0	48.0	48.0			
8.0	48.0	47.6			
9.0	48.0	45.2	39.0		
10.0	48.0	43.1	38.1		
11.0	47.7	41.2	36.9	33.3	30.0
12.0	44.7	39.4	35.8	32.8	29.7
14.0	39.7	36.3	33.8	31.6	29.2
16.0	35.3	33.7	32.1	30.6	28.9
18.0	29.1	30.9	30.7	29.6	28.8
20.0	24.1	25.6	26.9	27.5	27.6
22.0	20.0	21.2	22.0	22.4	
24.0	16.6	17.5	18.1	18.3	
26.0	13.8	14.4	14.8		
28.0	11.4	11.9	12.2		
30.0	9.5	9.8			
32.0	7.6	7.7			
危険角度 (°)	5	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SC性能 22.7mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0			
18.0	18.0	17.0	14.0		
20.0	17.1	15.9	13.4		
22.0	15.5	14.9	12.8	11.3	
24.0	14.0	13.9	12.2	10.9	10.0
26.0	12.8	13.0	11.8	10.6	10.0
28.0	11.8	12.2	11.3	10.4	10.0
30.0	10.9	11.4	11.0	10.2	10.0
32.0	10.1	10.8	10.7	10.0	10.0
34.0	9.3	10.2	10.4	9.9	
36.0	8.5	9.4	10.2	9.9	
38.0	7.4	8.2	8.8	9.1	
40.0	6.3	7.0	7.5		
42.0	5.2	5.9	6.3		
44.0	4.2	4.6			
危険角度 (°)	15	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SC性能 22.7mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0	18.0			
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0	18.0		
14.0	18.0	18.0	18.0		
16.0	18.0	18.0	18.0	18.0	18.0
18.0	18.0	18.0	18.0	18.0	18.0
20.0	18.0	18.0	18.0	18.0	18.0
22.0	18.0	18.0	18.0	18.0	18.0
24.0	18.0	18.0	18.0	18.0	18.0
26.0	15.5	16.7	17.7	17.5	
28.0	13.1	14.1	14.9	15.3	
30.0	11.1	11.9	12.5	12.8	
32.0	9.4	10.1	10.5		
34.0	7.9	8.5	8.7		
36.0	6.4	6.8			
38.0	5.1				
危険角度 (°)	5	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SC性能 22.7mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
7.0	15.0				
8.0	15.0				
9.0	15.0				
10.0	15.0				
11.0	15.0				
12.0	15.0				
14.0	15.0	15.0			
16.0	15.0	15.0			
18.0	15.0	14.0			
20.0	15.0	13.0	10.8		
22.0	14.3	12.2	10.2		
24.0	13.0	11.5	9.8		
26.0	11.9	10.9	9.3	8.3	
28.0	10.9	10.3	9.0	8.0	7.3
30.0	10.0	9.8	8.6	7.8	7.3
32.0	9.2	9.3	8.3	7.6	7.3
34.0	8.5	8.9	8.0	7.5	7.3
36.0	7.9	8.6	7.8	7.3	7.3
38.0	7.4	8.3	7.6	7.3	
40.0	6.9	7.9	7.4	7.2	
42.0	6.3	7.0	7.3	7.2	
44.0	5.3	6.1	6.6		
46.0	4.3	5.0	5.4		
48.0	3.5	3.9			
危険角度 (°)	15	15	30	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SC性能 22.7mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0	18.0		
18.0	18.0	18.0	18.0	16.0	
20.0	18.0	18.0	17.2	15.9	14.0
22.0	17.4	17.1	16.3	15.3	14.0
24.0	15.9	15.9	15.6	14.6	13.7
26.0	14.6	15.0	14.9	14.0	13.6
28.0	13.5	14.1	14.2	13.5	13.4
30.0	12.2	13.3	13.7	13.1	
32.0	10.5	11.4	12.2	12.7	
34.0	9.0	9.8	10.4	10.7	
36.0	7.7	8.4	8.8		
38.0	6.4	7.1	7.3		
40.0	5.2	5.6			
42.0	4.1				
危険角度 (°)	5	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SC性能 22.7mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
7.0	12.0				
8.0	12.0				
9.0	12.0				
10.0	12.0				
11.0	12.0				
12.0	12.0				
14.0	12.0				
16.0	12.0	12.0			
18.0	12.0	11.8			
20.0	12.0	11.0			
22.0	12.0	10.2			
24.0	11.9	9.6	8.1		
26.0	11.0	9.1	7.7		
28.0	10.0	8.6	7.4	6.5	
30.0	9.2	8.1	7.0	6.3	
32.0	8.4	7.7	6.8	6.1	5.4
34.0	7.8	7.4	6.5	5.9	5.4
36.0	7.2	7.1	6.3	5.8	5.4
38.0	6.7	6.8	6.1	5.7	5.4
40.0	6.2	6.5	5.9	5.5	5.4
42.0	5.8	6.3	5.8	5.5	
44.0	5.4	6.1	5.7	5.4	
46.0	5.1	5.9	5.5	5.4	
48.0	4.3	5.1	5.5		
50.0	3.5	4.2	4.6		
52.0	2.8	3.2			
危険角度 (°)	15	15	30	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【22.7mブーム時】

SD性能 22.7mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0°	15°	30°	45°	60°
荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
4.0	48.0				
5.0	48.0				
6.0	48.0				
7.0	48.0	48.0			
8.0	48.0	47.6			
9.0	48.0	45.2	39.0		
10.0	48.0	43.1	38.1		
11.0	47.7	41.2	36.9	33.3	30.0
12.0	44.7	39.4	35.8	32.8	29.7
14.0	35.7	36.3	33.8	31.6	29.2
16.0	27.6	29.5	31.1	30.6	28.9
18.0	21.8	23.3	24.6	25.5	25.8
20.0	17.4	18.7	19.7	20.3	20.4
22.0	14.0	15.0	15.8	16.2	
24.0	11.3	12.1	12.7	12.9	
26.0	9.1	9.7	10.1		
28.0	6.8	7.4	7.8		
30.0	4.7	5.2			
危険角度 (°)	23	25	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SD性能 22.7mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0°	15°	30°	45°	60°
荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0			
18.0	18.0	17.0	14.0		
20.0	17.1	15.9	13.4		
22.0	15.5	14.9	12.8	11.3	
24.0	14.0	13.9	12.2	10.9	10.0
26.0	12.6	13.0	11.8	10.6	10.0
28.0	10.7	12.2	11.3	10.4	10.0
30.0	9.1	10.4	11.0	10.2	10.0
32.0	7.7	8.9	9.9	10.0	10.0
34.0	6.4	7.5	8.4	9.1	
36.0	5.0	6.3	7.1	7.6	
38.0		4.9	5.8	6.2	
40.0			4.3		
危険角度 (°)	38	40	40	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SD性能 22.7mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0°	15°	30°	45°	60°
荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0	18.0			
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0	18.0		
14.0	18.0	18.0	18.0		
16.0	18.0	18.0	18.0	18.0	18.0
18.0	18.0	18.0	18.0	18.0	18.0
20.0	18.0	18.0	18.0	18.0	18.0
22.0	15.8	17.3	18.0	18.0	18.0
24.0	13.0	14.3	15.5	16.3	16.7
26.0	10.7	11.8	12.8	13.4	
28.0	8.8	9.8	10.5	10.9	
30.0	7.1	8.0	8.6	8.8	
32.0	5.3	6.2	6.8		
34.0		4.4	4.7		
危険角度 (°)	32	32	32	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SD性能 22.7mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0°	15°	30°	45°	60°
荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
7.0	15.0				
8.0	15.0				
9.0	15.0				
10.0	15.0				
11.0	15.0				
12.0	15.0				
14.0	15.0	15.0			
16.0	15.0	15.0			
18.0	15.0	14.0			
20.0	15.0	13.0	10.8		
22.0	14.3	12.2	10.2		
24.0	13.0	11.5	9.8		
26.0	11.9	10.9	9.3	8.3	
28.0	10.9	10.3	9.0	8.0	7.3
30.0	9.9	9.8	8.6	7.8	7.3
32.0	8.5	9.3	8.3	7.6	7.3
34.0	7.3	8.6	8.0	7.5	7.3
36.0	6.2	7.4	7.8	7.3	7.3
38.0	5.0	6.3	7.2	7.3	
40.0	3.9	5.2	6.1	6.6	
42.0		4.0	4.9	5.3	
44.0			3.6		
危険角度 (°)	38	40	40	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SD性能 22.7mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0°	15°	30°	45°	60°
荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0	18.0		
18.0	18.0	18.0	18.0	16.0	
20.0	18.0	18.0	17.2	15.9	14.0
22.0	16.8	17.1	16.3	15.3	14.0
24.0	14.0	15.7	15.6	14.6	13.7
26.0	11.7	13.2	14.6	14.0	13.6
28.0	9.8	11.1	12.2	13.1	13.4
30.0	8.2	9.3	10.3	10.9	
32.0	6.8	7.8	8.5	9.0	
34.0	5.2	6.3	7.0	7.3	
36.0		4.8	5.4		
危険角度 (°)	35	35	38	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SD性能 22.7mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0°	15°	30°	45°	60°
荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
7.0	12.0				
8.0	12.0				
9.0	12.0				
10.0	12.0				
11.0	12.0				
12.0	12.0				
14.0	12.0				
16.0	12.0	12.0			
18.0	12.0	11.8			
20.0	12.0	11.0			
22.0	12.0	10.2			
24.0	11.9	9.6	8.1		
26.0	11.0	9.1	7.7		
28.0	10.0	8.6	7.4	6.5	
30.0	9.2	8.1	7.0	6.3	
32.0	8.4	7.7	6.8	6.1	5.4
34.0	7.8	7.4	6.5	5.9	5.4
36.0	6.8	7.1	6.3	5.8	5.4
38.0	5.9	6.8	6.1	5.7	5.4
40.0	4.8	6.1	5.9	5.5	5.4
42.0	3.8	5.1	5.8	5.5	
44.0		4.1	5.1	5.4	
46.0		3.1	4.0	4.5	
48.0			2.9		
危険角度 (°)	38	40	40	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【22.7mブーム時】

SE性能 22.7mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
4.0	48.0				
5.0	48.0				
6.0	48.0				
7.0	48.0	48.0			
8.0	48.0	47.6			
9.0	48.0	45.2	39.0		
10.0	48.0	43.1	38.1		
11.0	47.7	41.2	36.9	33.3	30.0
12.0	40.7	39.4	35.8	32.8	29.7
14.0	29.1	31.6	33.8	31.6	29.2
16.0	21.5	23.5	25.2	26.5	27.2
18.0	16.2	17.8	19.2	20.1	20.5
20.0	12.3	13.6	14.7	15.3	15.5
22.0	9.3	10.4	11.2	11.6	
24.0	6.4	7.7	8.4	8.6	
26.0		4.9	5.5		
危険角度 (°)	42	42	42	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SE性能 22.7mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0			
18.0	18.0	17.0	14.0		
20.0	16.3	15.9	13.4		
22.0	13.2	14.9	12.8	11.3	
24.0	10.7	12.8	12.2	10.9	10.0
26.0	8.7	10.6	11.8	10.6	10.0
28.0	7.0	8.7	10.2	10.4	10.0
30.0	5.3	7.1	8.4	9.5	10.0
32.0		5.6	6.8	7.7	8.2
34.0		4.0	5.4	6.2	
36.0				4.6	
危険角度 (°)	49	49	53	53	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SE性能 22.7mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0	18.0			
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0	18.0		
14.0	18.0	18.0	18.0		
16.0	18.0	18.0	18.0	18.0	18.0
18.0	18.0	18.0	18.0	18.0	18.0
20.0	14.2	16.2	17.9	18.0	18.0
22.0	11.1	12.8	14.3	15.4	16.0
24.0	8.7	10.1	11.3	12.2	12.6
26.0	6.4	7.9	8.9	9.6	
28.0	4.3	5.7	6.9	7.3	
30.0			4.6	4.9	
危険角度 (°)	42	46	46	47	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SE性能 22.7mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
7.0	15.0				
8.0	15.0				
9.0	15.0				
10.0	15.0				
11.0	15.0				
12.0	15.0				
14.0	15.0	15.0			
16.0	15.0	15.0			
18.0	15.0	14.0			
20.0	15.0	13.0	10.8		
22.0	14.2	12.2	10.2		
24.0	11.7	11.5	9.8		
26.0	9.7	10.9	9.3	8.3	
28.0	8.0	9.9	9.0	8.0	7.3
30.0	6.6	8.2	8.6	7.8	7.3
32.0	5.1	6.8	8.2	7.6	7.3
34.0		5.6	6.8	7.5	7.3
36.0		4.2	5.6	6.5	6.9
38.0		3.0	4.3	5.2	
40.0				3.7	
危険角度 (°)	49	49	53	53	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SE性能 22.7mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0	18.0		
18.0	18.0	18.0	18.0	16.0	
20.0	15.4	17.8	17.2	15.9	14.0
22.0	12.3	14.3	16.3	15.3	14.0
24.0	9.8	11.6	13.2	14.6	13.7
26.0	7.8	9.4	10.7	11.9	12.5
28.0	5.9	7.5	8.7	9.6	10.0
30.0	4.1	5.7	6.9	7.6	
32.0			5.1	5.8	
危険角度 (°)	44	49	49	51	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SE性能 22.7mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
7.0	12.0				
8.0	12.0				
9.0	12.0				
10.0	12.0				
11.0	12.0				
12.0	12.0				
14.0	12.0				
16.0	12.0	12.0			
18.0	12.0	11.8			
20.0	12.0	11.0			
22.0	12.0	10.2			
24.0	11.9	9.6	8.1		
26.0	10.3	9.1	7.7		
28.0	8.6	8.6	7.4	6.5	
30.0	7.2	8.1	7.0	6.3	
32.0	6.0	7.7	6.8	6.1	5.4
34.0	4.6	6.4	6.5	5.9	5.4
36.0	3.4	5.4	6.3	5.8	5.4
38.0		4.1	5.6	5.7	5.4
40.0		3.0	4.5	5.4	5.4
42.0			3.3	4.3	
44.0				2.9	
危険角度 (°)	49	49	53	53	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【22.7mブーム時】

SF性能 22.7mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
4.0	48.0				
5.0	48.0				
6.0	48.0				
7.0	48.0	48.0			
8.0	48.0	47.6			
9.0	48.0	45.2	39.0		
10.0	46.6	43.1	38.1		
11.0	37.3	41.0	36.9	33.3	30.0
12.0	30.4	33.6	35.8	32.8	29.7
14.0	21.2	23.6	25.6	27.3	28.3
16.0	15.2	17.0	18.6	19.8	20.5
18.0	11.0	12.4	13.7	14.6	14.9
20.0	7.8	9.1	10.0	10.7	10.8
22.0	5.0	6.4	7.2	7.6	
24.0			4.4	4.8	
危険角度 (°)	47	50	50	50	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SF性能 22.7mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0			
18.0	14.9	17.0	14.0		
20.0	11.6	14.2	13.4		
22.0	9.1	11.4	12.8	11.3	
24.0	7.1	9.1	11.0	10.9	10.0
26.0	5.5	7.2	8.9	10.3	10.0
28.0		5.7	7.1	8.3	9.2
30.0		4.3	5.6	6.6	7.3
32.0			4.3	5.1	5.6
危険角度 (°)	55	55	57	61	61
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SF性能 22.7mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0	18.0			
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0	18.0		
14.0	18.0	18.0	18.0		
16.0	17.1	18.0	18.0	18.0	18.0
18.0	12.8	15.0	17.0	18.0	18.0
20.0	9.6	11.4	13.1	14.5	15.4
22.0	7.1	8.7	10.1	11.2	11.8
24.0	4.9	6.5	7.7	8.5	8.8
26.0		4.4	5.7	6.3	
28.0				4.1	
危険角度 (°)	50	51	54	54	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SF性能 22.7mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
7.0	15.0				
8.0	15.0				
9.0	15.0				
10.0	15.0				
11.0	15.0				
12.0	15.0				
14.0	15.0	15.0			
16.0	15.0	15.0			
18.0	15.0	14.0			
20.0	12.6	13.0	10.8		
22.0	10.1	12.2	10.2		
24.0	8.0	10.3	9.8		
26.0	6.4	8.4	9.3	8.3	
28.0	5.1	6.8	8.5	8.0	7.3
30.0		5.5	6.9	7.8	7.3
32.0		4.3	5.6	6.8	7.3
34.0		2.9	4.5	5.4	6.1
36.0			3.2	4.2	4.7
危険角度 (°)	55	55	57	61	61
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SF性能 22.7mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	18.0				
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0	18.0		
18.0	13.9	16.6	18.0	16.0	
20.0	10.7	13.0	15.1	15.9	14.0
22.0	8.2	10.2	12.0	13.5	14.0
24.0	6.2	7.9	9.5	10.7	11.6
26.0	4.3	6.1	7.4	8.5	9.1
28.0		4.4	5.7	6.5	6.9
30.0			4.0	4.9	
危険角度 (°)	51	51	54	56	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SF性能 22.7mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
7.0	12.0				
8.0	12.0				
9.0	12.0				
10.0	12.0				
11.0	12.0				
12.0	12.0				
14.0	12.0				
16.0	12.0	12.0			
18.0	12.0	11.8			
20.0	12.0	11.0			
22.0	10.7	10.2			
24.0	8.7	9.6	8.1		
26.0	7.0	9.1	7.7		
28.0	5.7	7.6	7.4	6.5	
30.0	4.5	6.2	7.0	6.3	
32.0	3.1	5.1	6.6	6.1	5.4
34.0		4.1	5.4	5.9	5.4
36.0		2.9	4.4	5.5	5.4
38.0			3.4	4.4	5.0
40.0				3.5	3.9
危険角度 (°)	55	55	59	61	61
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【31.8mブーム時】

SA性能 31.8mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	48.0				
6.0	48.0				
7.0	48.0				
8.0	48.0				
9.0	48.0	47.5			
10.0	48.0	45.7			
11.0	48.0	44.0	38.0		
12.0	48.0	42.3	37.1	33.2	
14.0	46.2	39.4	35.3	32.2	28.5
16.0	41.9	36.9	33.8	31.4	28.5
18.0	38.2	34.8	32.5	30.6	28.5
20.0	35.2	32.9	31.3	29.9	28.5
22.0	32.5	31.2	30.3	29.0	28.5
24.0	30.3	29.7	29.4	28.1	28.5
26.0	28.3	28.4	28.3	27.4	
28.0	24.9	26.0	26.1	26.0	
30.0	21.8	22.7	23.3	23.5	
32.0	19.1	19.8	20.3	20.4	
34.0	16.7	17.3	17.6		
36.0	14.5	15.0	15.2		
38.0	12.7	13.0			
40.0	10.3	11.1			
危険角度 (°)	10	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SA性能 31.8mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0	18.0			
16.0	18.0	18.0			
18.0	18.0	17.8			
20.0	18.0	16.8	13.6		
22.0	18.0	15.9	13.1		
24.0	16.5	15.1	12.6	11.0	
26.0	15.2	14.2	12.1	10.7	9.8
28.0	14.0	13.4	11.8	10.5	9.8
30.0	13.0	12.7	11.4	10.3	9.8
32.0	12.1	12.0	11.1	10.1	9.8
34.0	11.3	11.5	10.8	10.0	9.8
36.0	10.5	10.9	10.6	9.9	9.8
38.0	9.9	10.4	10.3	9.8	9.8
40.0	9.3	10.0	10.2	9.8	
42.0	8.8	9.6	10.0	9.8	
44.0	8.3	9.3	9.7	9.8	
46.0	7.9	9.0	9.5		
48.0	7.5	8.7	9.4		
50.0	7.1	8.5	9.3		
52.0	6.8	8.0			
54.0		4.9			
危険角度 (°)	15	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SA性能 31.8mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0	18.0		
16.0	18.0	18.0	18.0	18.0	
18.0	18.0	18.0	18.0	18.0	18.0
20.0	18.0	18.0	18.0	18.0	18.0
22.0	18.0	18.0	18.0	18.0	18.0
24.0	18.0	18.0	18.0	18.0	18.0
26.0	18.0	18.0	18.0	18.0	18.0
28.0	18.0	18.0	18.0	17.8	18.0
30.0	18.0	18.0	18.0	17.4	18.0
32.0	16.9	17.5	17.6	17.0	
34.0	15.9	16.8	17.0	16.8	
36.0	15.0	16.2	16.5	16.6	
38.0	14.3	15.3	15.8		
40.0	12.8	13.4	13.8		
42.0	11.2	11.8	12.0		
44.0	9.9	10.2			
46.0	5.5	6.3			
危険角度 (°)	10	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SA性能 31.8mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	15.0				
9.0	15.0				
10.0	15.0				
11.0	15.0				
12.0	15.0				
14.0	15.0				
16.0	15.0	15.0			
18.0	15.0	14.6			
20.0	15.0	13.7			
22.0	15.0	12.9	10.0		
24.0	15.0	12.2	10.0		
26.0	13.9	11.6	9.6	8.3	
28.0	12.8	11.0	9.3	8.1	
30.0	11.8	10.5	9.0	7.9	7.2
32.0	11.0	10.1	8.7	7.7	7.2
34.0	10.2	9.7	8.4	7.6	7.2
36.0	9.5	9.3	8.2	7.5	7.2
38.0	8.9	9.0	8.0	7.4	7.2
40.0	8.4	8.7	7.8	7.3	7.2
42.0	7.9	8.4	7.6	7.2	7.2
44.0	7.4	8.1	7.5	7.2	
46.0	7.0	7.8	7.4	7.2	
48.0	6.6	7.5	7.3	7.2	
50.0	6.3	7.3	7.2		
52.0	5.9	7.0	7.2		
54.0	5.7	6.7	7.2		
56.0	5.4	6.4			
58.0		4.3			
危険角度 (°)	15	15	30	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SA性能 31.8mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0			
18.0	18.0	18.0	18.0		
20.0	18.0	18.0	18.0	16.0	
22.0	18.0	18.0	17.1	15.6	14.0
24.0	18.0	17.6	16.4	15.1	13.8
26.0	17.4	16.6	15.7	14.5	13.6
28.0	16.1	15.7	15.1	14.1	13.5
30.0	15.0	14.9	14.6	13.7	13.4
32.0	14.0	14.2	14.1	13.3	13.3
34.0	13.1	13.6	13.6	13.0	13.2
36.0	12.3	13.0	13.2	12.8	
38.0	11.6	12.5	12.8	12.6	
40.0	11.0	12.0	12.4	12.5	
42.0	10.4	11.7	12.2		
44.0	9.9	11.3	12.0		
46.0	9.4	10.3	10.6		
48.0	8.6	9.0			
50.0	4.5	5.5			
危険角度 (°)	10	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SA性能 31.8mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
9.0	12.0				
10.0	12.0				
11.0	12.0				
12.0	12.0				
14.0	12.0				
16.0	12.0				
18.0	12.0	12.0			
20.0	12.0	11.4			
22.0	12.0	10.7			
24.0	12.0	10.1	8.1		
26.0	12.0	9.6	7.9		
28.0	11.5	9.1	7.5		
30.0	10.8	8.7	7.3	6.3	
32.0	10.0	8.3	7.0	6.2	
34.0	9.3	7.9	6.8	6.0	5.4
36.0	8.6	7.6	6.6	5.9	5.4
38.0	8.0	7.3	6.4	5.8	5.4
40.0	7.5	7.0	6.2	5.7	5.4
42.0	7.0	6.8	6.0	5.6	5.4
44.0	6.6	6.6	5.9	5.5	5.4
46.0	6.2	6.4	5.8	5.4	5.4
48.0	5.8	6.2	5.7	5.4	
50.0	5.5	6.0	5.6	5.4	
52.0	5.2	5.9	5.5	5.4	
54.0	4.9	5.7	5.4		
56.0	4.7	5.6	5.4		
58.0	4.4	5.4	5.4		
60.0	4.2	5.2			
62.0		3.8			
危険角度 (°)	15	15	30	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【31.8mブーム時】

SB性能 31.8mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	48.0				
6.0	48.0				
7.0	48.0				
8.0	48.0				
9.0	48.0	47.5			
10.0	48.0	45.7			
11.0	48.0	44.0	38.0		
12.0	48.0	42.3	37.1	33.2	
14.0	46.2	39.4	35.3	32.2	28.5
16.0	41.9	36.9	33.8	31.4	28.5
18.0	36.4	34.8	32.5	30.6	28.5
20.0	30.5	32.3	31.3	29.9	28.5
22.0	25.7	27.0	28.1	28.8	28.5
24.0	21.7	22.8	23.6	24.2	24.3
26.0	18.3	19.2	20.0	20.4	
28.0	15.4	16.3	16.9	17.2	
30.0	13.0	13.8	14.2	14.4	
32.0	10.8	11.5	12.0	12.1	
34.0	8.9	9.5	9.8		
36.0	7.2	7.7	7.9		
38.0	5.7	6.0			
40.0	4.2	4.3			
危険角度 (°)	15	15	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SB性能 31.8mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0	18.0			
16.0	18.0	18.0			
18.0	18.0	17.8			
20.0	18.0	16.8	13.6		
22.0	18.0	15.9	13.1		
24.0	16.5	15.1	12.6	11.0	
26.0	15.2	14.2	12.1	10.7	9.8
28.0	14.0	13.4	11.8	10.5	9.8
30.0	13.0	12.7	11.4	10.3	9.8
32.0	12.1	12.0	11.1	10.1	9.8
34.0	11.3	11.5	10.8	10.0	9.8
36.0	10.5	10.9	10.6	9.9	9.8
38.0	9.5	10.4	10.3	9.8	9.8
40.0	8.3	9.3	10.2	9.8	
42.0	7.1	8.1	8.9	9.3	
44.0	5.9	7.0	7.7	8.0	
46.0	4.8	5.8	6.5		
48.0		4.6	5.2		
危険角度 (°)	33	33	35	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SB性能 31.8mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0	18.0		
16.0	18.0	18.0	18.0	18.0	
18.0	18.0	18.0	18.0	18.0	18.0
20.0	18.0	18.0	18.0	18.0	18.0
22.0	18.0	18.0	18.0	18.0	18.0
24.0	18.0	18.0	18.0	18.0	18.0
26.0	18.0	18.0	18.0	18.0	18.0
28.0	16.9	18.0	18.0	17.8	18.0
30.0	14.5	15.7	16.6	17.3	17.4
32.0	12.5	13.5	14.3	14.8	
34.0	10.7	11.6	12.3	12.6	
36.0	9.0	9.9	10.5	10.7	
38.0	7.5	8.3	8.9		
40.0	6.1	6.8	7.2		
42.0	4.8	5.3	5.6		
危険角度 (°)	25	28	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SB性能 31.8mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	15.0				
9.0	15.0				
10.0	15.0				
11.0	15.0				
12.0	15.0				
14.0	15.0				
16.0	15.0	15.0			
18.0	15.0	14.6			
20.0	15.0	13.7			
22.0	15.0	12.9	10.0		
24.0	15.0	12.2	10.0		
26.0	13.9	11.6	9.6	8.3	
28.0	12.8	11.0	9.3	8.1	
30.0	11.8	10.5	9.0	7.9	7.2
32.0	11.0	10.1	8.7	7.7	7.2
34.0	10.2	9.7	8.4	7.6	7.2
36.0	9.5	9.3	8.2	7.5	7.2
38.0	8.9	9.0	8.0	7.4	7.2
40.0	8.4	8.7	7.8	7.3	7.2
42.0	7.9	8.4	7.6	7.2	7.2
44.0	7.1	8.1	7.5	7.2	
46.0	6.0	7.1	7.4	7.2	
48.0	4.9	6.1	6.8	7.1	
50.0	4.0	5.0	5.7		
52.0		4.0	4.5		
危険角度 (°)	33	33	35	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SB性能 31.8mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0			
18.0	18.0	18.0	18.0		
20.0	18.0	18.0	18.0	16.0	
22.0	18.0	18.0	17.1	15.6	14.0
24.0	18.0	17.6	16.4	15.1	13.8
26.0	17.4	16.6	15.7	14.5	13.6
28.0	16.1	15.7	15.1	14.1	13.5
30.0	15.0	14.9	14.6	13.7	13.4
32.0	13.4	14.2	14.1	13.3	13.3
34.0	11.6	12.8	13.6	13.0	13.2
36.0	10.1	11.1	12.0	12.5	
38.0	8.7	9.6	10.4	10.8	
40.0	7.3	8.3	8.9	9.2	
42.0	6.1	7.0	7.6		
44.0	4.8	5.6	6.1		
46.0		4.4	4.6		
危険角度 (°)	30	30	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SB性能 31.8mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
9.0	12.0				
10.0	12.0				
11.0	12.0				
12.0	12.0				
14.0	12.0				
16.0	12.0				
18.0	12.0	12.0			
20.0	12.0	11.4			
22.0	12.0	10.7			
24.0	12.0	10.1	8.1		
26.0	12.0	9.6	7.9		
28.0	11.5	9.1	7.5		
30.0	10.8	8.7	7.3	6.3	
32.0	10.0	8.3	7.0	6.2	
34.0	9.3	7.9	6.8	6.0	5.4
36.0	8.6	7.6	6.6	5.9	5.4
38.0	8.0	7.3	6.4	5.8	5.4
40.0	7.5	7.0	6.2	5.7	5.4
42.0	7.0	6.8	6.0	5.6	5.4
44.0	6.6	6.6	5.9	5.5	5.4
46.0	6.2	6.4	5.8	5.4	5.4
48.0	5.8	6.2	5.7	5.4	
50.0	4.8	6.0	5.6	5.4	
52.0	4.0	5.1	5.5	5.4	
54.0		4.1	4.9		
56.0		3.3	3.8		
危険角度 (°)	33	33	35	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【31.8mブーム時】

SC性能 31.8mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	48.0				
6.0	48.0				
7.0	48.0				
8.0	48.0				
9.0	48.0	47.5			
10.0	48.0	45.7			
11.0	48.0	44.0	38.0		
12.0	48.0	42.3	37.1	33.2	
14.0	41.8	39.4	35.3	32.2	28.5
16.0	33.8	36.2	33.8	31.4	28.5
18.0	27.5	29.7	31.5	30.6	28.5
20.0	22.6	24.4	25.8	26.7	27.1
22.0	18.5	20.1	21.2	21.9	22.2
24.0	15.1	16.4	17.3	17.9	18.0
26.0	12.2	13.4	14.2	14.6	
28.0	9.8	11.0	11.6	11.9	
30.0	7.7	8.9	9.2	9.4	
32.0	5.7	6.6	7.1	7.1	
34.0		4.5	4.9		
危険角度 (°)	39	39	39	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SC性能 31.8mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0	18.0			
16.0	18.0	18.0			
18.0	18.0	17.8			
20.0	18.0	16.8	13.6		
22.0	18.0	15.9	13.1		
24.0	16.5	15.1	12.6	11.0	
26.0	15.2	14.2	12.1	10.7	9.8
28.0	13.4	13.4	11.8	10.5	9.8
30.0	11.4	12.7	11.4	10.3	9.8
32.0	9.7	11.3	11.1	10.1	9.8
34.0	8.2	9.6	10.8	10.0	9.8
36.0	6.8	8.2	9.3	9.9	9.8
38.0	5.3	7.0	7.9	8.7	8.9
40.0	4.0	5.5	6.7	7.3	
42.0		4.2	5.3	5.9	
44.0				4.3	
危険角度 (°)	43	45	49	49	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SC性能 31.8mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0	18.0		
16.0	18.0	18.0	18.0	18.0	
18.0	18.0	18.0	18.0	18.0	18.0
20.0	18.0	18.0	18.0	18.0	18.0
22.0	18.0	18.0	18.0	18.0	18.0
24.0	16.8	18.0	18.0	18.0	18.0
26.0	14.0	15.5	16.8	17.8	18.0
28.0	11.6	12.9	14.1	14.8	15.2
30.0	9.5	10.8	11.7	12.4	12.5
32.0	7.7	9.0	9.8	10.2	
34.0	5.9	7.2	8.0	8.4	
36.0	4.3	5.4	6.2	6.5	
38.0			4.4		
危険角度 (°)	40	43	43	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SC性能 31.8mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	15.0				
9.0	15.0				
10.0	15.0				
11.0	15.0				
12.0	15.0				
14.0	15.0				
16.0	15.0	15.0			
18.0	15.0	14.6			
20.0	15.0	13.7			
22.0	15.0	12.9	10.0		
24.0	15.0	12.2	10.0		
26.0	13.9	11.6	9.6	8.3	
28.0	12.8	11.0	9.3	8.1	
30.0	11.8	10.5	9.0	7.9	7.2
32.0	10.6	10.1	8.7	7.7	7.2
34.0	8.1	9.7	8.4	7.6	7.2
36.0	7.8	9.3	8.2	7.5	7.2
38.0	6.6	8.0	8.0	7.4	7.2
40.0	5.3	6.9	7.8	7.3	7.2
42.0	4.1	5.7	6.8	7.2	7.2
44.0	3.0	4.5	5.7	6.4	
46.0		3.4	4.4	5.1	
48.0				3.7	
危険角度 (°)	43	45	49	49	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SC性能 31.8mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0			
18.0	18.0	18.0	18.0		
20.0	18.0	18.0	18.0	16.0	
22.0	18.0	18.0	17.1	15.6	14.0
24.0	17.8	17.6	16.4	15.1	13.8
26.0	15.0	16.6	15.7	14.5	13.6
28.0	12.6	14.3	15.1	14.1	13.5
30.0	10.6	12.1	13.4	13.7	13.4
32.0	8.9	10.2	11.3	12.2	12.6
34.0	7.2	8.6	9.6	10.3	10.5
36.0	5.6	7.1	8.0	8.6	
38.0	4.2	5.5	6.5	7.1	
40.0		4.0	4.9	5.3	
危険角度 (°)	41	42	45	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SC性能 31.8mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
9.0	12.0				
10.0	12.0				
11.0	12.0				
12.0	12.0				
14.0	12.0				
16.0	12.0				
18.0	12.0	12.0			
20.0	12.0	11.4			
22.0	12.0	10.7			
24.0	12.0	10.1	8.1		
26.0	12.0	9.6	7.9		
28.0	11.5	9.1	7.5		
30.0	10.8	8.7	7.3	6.3	
32.0	10.0	8.3	7.0	6.2	
34.0	9.3	7.9	6.8	6.0	5.4
36.0	8.4	7.6	6.6	5.9	5.4
38.0	7.3	7.3	6.4	5.8	5.4
40.0	6.1	7.0	6.2	5.7	5.4
42.0	5.0	6.7	6.0	5.6	5.4
44.0	3.9	5.6	5.9	5.5	5.4
46.0	2.9	4.5	5.8	5.4	5.4
48.0		3.5	4.7	5.4	
50.0			3.6	4.3	
52.0				3.1	
危険角度 (°)	43	46	49	49	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【31.8mブーム時】

SD性能 31.8mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	48.0				
6.0	48.0				
7.0	48.0				
8.0	48.0				
9.0	48.0	47.5			
10.0	48.0	45.7			
11.0	48.0	44.0	38.0		
12.0	46.1	42.3	37.1	33.2	
14.0	34.2	36.8	35.3	32.2	28.5
16.0	26.2	28.4	30.2	31.4	28.5
18.0	20.5	22.2	23.8	24.9	25.5
20.0	16.1	17.6	18.9	19.8	20.2
22.0	12.7	14.0	15.1	15.8	16.0
24.0	10.0	11.1	12.0	12.5	12.7
26.0	7.4	8.7	9.4	9.9	
28.0	5.0	6.1	7.0	7.4	
30.0			4.6	4.8	
危険角度 (°)	47	50	50	50	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SD性能 31.8mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0	18.0			
16.0	18.0	18.0			
18.0	18.0	17.8			
20.0	18.0	16.8	13.6		
22.0	16.1	15.9	13.1		
24.0	13.3	15.1	12.6	11.0	
26.0	11.0	13.1	12.1	10.7	9.8
28.0	9.1	11.0	11.8	10.5	9.8
30.0	7.5	9.2	10.8	10.3	9.8
32.0	5.7	7.6	9.0	10.1	9.8
34.0	4.1	6.2	7.5	8.5	9.1
36.0		4.6	6.2	7.0	7.5
38.0			4.6	5.7	6.0
40.0				4.0	
危険角度 (°)	52	54	56	56	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SD性能 31.8mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0	18.0		
16.0	18.0	18.0	18.0	18.0	
18.0	18.0	18.0	18.0	18.0	18.0
20.0	17.7	18.0	18.0	18.0	18.0
22.0	14.2	16.1	17.8	18.0	18.0
24.0	11.5	13.2	14.6	15.7	16.4
26.0	9.2	10.7	11.9	12.9	13.4
28.0	7.1	8.6	9.7	10.5	10.8
30.0	5.0	6.6	7.8	8.4	8.6
32.0		4.6	5.8	6.5	
34.0				4.4	
危険角度 (°)	50	51	53	53	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SD性能 31.8mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	15.0				
9.0	15.0				
10.0	15.0				
11.0	15.0				
12.0	15.0				
14.0	15.0				
16.0	15.0	15.0			
18.0	15.0	14.6			
20.0	15.0	13.7			
22.0	15.0	12.9	10.0		
24.0	14.3	12.2	10.0		
26.0	12.0	11.6	9.6	8.3	
28.0	10.0	11.0	9.3	8.1	
30.0	8.4	10.4	9.0	7.9	7.2
32.0	7.0	8.8	8.7	7.7	7.2
34.0	5.4	7.4	8.4	7.6	7.2
36.0	4.0	6.2	7.5	7.5	7.2
38.0		4.8	6.3	7.3	7.2
40.0		3.5	5.1	6.1	6.5
42.0			3.8	4.8	5.2
44.0				3.4	
危険角度 (°)	52	54	56	56	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SD性能 31.8mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0			
18.0	18.0	18.0	18.0		
20.0	18.0	18.0	18.0	16.0	
22.0	15.2	17.6	17.1	15.6	14.0
24.0	12.5	14.5	16.4	15.1	13.8
26.0	10.2	12.0	13.6	14.5	13.6
28.0	8.3	9.9	11.3	12.5	13.2
30.0	6.3	8.1	9.4	10.4	10.9
32.0	4.6	6.4	7.7	8.5	8.9
34.0		4.7	6.1	6.9	7.1
36.0			4.3	5.1	
危険角度 (°)	51	53	53	55	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SD性能 31.8mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
9.0	12.0				
10.0	12.0				
11.0	12.0				
12.0	12.0				
14.0	12.0				
16.0	12.0				
18.0	12.0	12.0			
20.0	12.0	11.4			
22.0	12.0	10.7			
24.0	12.0	10.1	8.1		
26.0	12.0	9.6	7.9		
28.0	10.7	9.1	7.5		
30.0	9.0	8.7	7.3	6.3	
32.0	7.6	8.3	7.0	6.2	
34.0	6.3	7.9	6.8	6.0	5.4
36.0	4.9	7.0	6.6	5.9	5.4
38.0	3.7	5.9	6.4	5.8	5.4
40.0		4.6	6.2	5.7	5.4
42.0		3.5	5.2	5.6	5.4
44.0			4.0	5.2	5.4
46.0			2.9	3.9	4.3
48.0				2.7	
危険角度 (°)	53	54	56	56	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【31.8mブーム時】

SE性能 31.8mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	48.0				
6.0	48.0				
7.0	48.0				
8.0	48.0				
9.0	48.0	47.5			
10.0	48.0	45.7			
11.0	46.1	44.0	38.0		
12.0	38.9	42.3	37.1	33.2	
14.0	27.4	30.3	32.8	32.2	28.5
16.0	20.0	22.3	24.3	25.8	26.8
18.0	14.8	16.7	18.3	19.5	20.2
20.0	10.9	12.5	13.8	14.8	15.2
22.0	7.6	9.3	10.4	11.1	11.4
24.0	4.5	6.2	7.5	8.2	8.3
26.0			4.5	5.1	
危険角度 (°)	54	57	57	57	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SE性能 31.8mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0	18.0			
16.0	18.0	18.0			
18.0	18.0	17.8			
20.0	14.5	16.8	13.6		
22.0	11.4	14.3	13.1		
24.0	9.0	11.5	12.6	11.0	
26.0	6.9	9.3	11.3	10.7	9.8
28.0	4.8	7.4	9.2	10.5	9.8
30.0		5.6	7.4	8.8	9.8
32.0			5.9	7.1	7.8
34.0			4.1	5.6	6.2
36.0					4.4
危険角度 (°)	60	62	62	65	65
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SE性能 31.8mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0	18.0		
16.0	18.0	18.0	18.0	18.0	
18.0	16.4	18.0	18.0	18.0	18.0
20.0	12.5	14.9	17.0	18.0	18.0
22.0	9.5	11.5	13.3	14.7	15.6
24.0	6.8	8.9	10.4	11.6	12.3
26.0		6.4	8.0	9.0	9.5
28.0		4.1	5.7	6.8	7.1
30.0				4.4	4.6
危険角度 (°)	58	58	60	60	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SE性能 31.8mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	15.0				
9.0	15.0				
10.0	15.0				
11.0	15.0				
12.0	15.0				
14.0	15.0				
16.0	15.0	15.0			
18.0	15.0	14.6			
20.0	15.0	13.7			
22.0	12.5	12.9	10.0		
24.0	10.0	12.2	10.0		
26.0	8.0	10.6	9.6	8.3	
28.0	6.2	8.6	9.3	8.1	
30.0	4.3	7.0	8.9	7.9	7.2
32.0		5.5	7.3	7.7	7.2
34.0		3.9	6.0	7.3	7.2
36.0			4.5	5.9	6.6
38.0			3.0	4.5	5.2
40.0					3.6
危険角度 (°)	60	62	62	65	65
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SE性能 31.8mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0			
18.0	17.6	18.0	18.0		
20.0	13.6	16.5	18.0	16.0	
22.0	10.6	13.0	15.3	15.6	14.0
24.0	8.1	10.3	12.3	13.9	13.8
26.0	5.7	8.1	9.8	11.2	12.1
28.0		6.0	7.7	8.9	9.7
30.0			5.8	7.0	7.6
32.0				5.1	5.6
危険角度 (°)	59	61	62	62	63
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SE性能 31.8mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
9.0	12.0				
10.0	12.0				
11.0	12.0				
12.0	12.0				
14.0	12.0				
16.0	12.0				
18.0	12.0	12.0			
20.0	12.0	11.4			
22.0	12.0	10.7			
24.0	10.7	10.1	8.1		
26.0	8.7	9.6	7.9		
28.0	7.0	9.1	7.5		
30.0	5.3	7.9	7.3	6.3	
32.0	3.7	6.5	7.0	6.2	
34.0		5.1	6.8	6.0	5.4
36.0		3.7	5.8	5.9	5.4
38.0			4.6	5.8	5.4
40.0			3.2	4.8	5.4
42.0				3.5	4.4
44.0					2.9
危険角度 (°)	60	62	63	65	65
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【31.8mブーム時】

SF性能 31.8mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
5.0	48.0				
6.0	48.0				
7.0	48.0				
8.0	48.0				
9.0	48.0	47.5			
10.0	44.1	45.7			
11.0	35.4	39.5	38.0		
12.0	28.7	32.2	35.3	33.2	
14.0	19.6	22.3	24.7	26.6	27.8
16.0	13.7	15.9	17.7	19.2	20.1
18.0	9.6	11.4	12.9	14.0	14.6
20.0		8.0	9.2	10.1	10.6
22.0			6.4	7.1	7.4
危険角度 (°)	63	64	64	64	64
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SF性能 31.8mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0	18.0			
16.0	17.4	18.0			
18.0	13.1	16.7			
20.0	9.9	13.0	13.6		
22.0	7.4	10.1	12.7		
24.0		7.9	10.1	11.0	
26.0		6.0	8.0	9.7	9.8
28.0			6.2	7.7	8.8
30.0			4.7	6.0	6.9
32.0				4.5	5.3
危険角度 (°)	66	67	68	69	70
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SF性能 31.8mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
6.0	18.0				
7.0	18.0				
8.0	18.0				
9.0	18.0				
10.0	18.0	18.0			
11.0	18.0	18.0			
12.0	18.0	18.0			
14.0	18.0	18.0	18.0		
16.0	15.4	18.0	18.0	18.0	
18.0	11.2	13.7	16.1	18.0	18.0
20.0	8.0	10.2	12.2	13.8	14.9
22.0		7.5	9.2	10.5	11.4
24.0			6.8	7.9	8.5
26.0				5.7	6.2
危険角度 (°)	64	65	66	66	66
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SF性能 31.8mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	15.0				
9.0	15.0				
10.0	15.0				
11.0	15.0				
12.0	15.0				
14.0	15.0				
16.0	15.0	15.0			
18.0	14.2	14.6			
20.0	10.9	13.7			
22.0	8.4	11.5	10.0		
24.0	6.5	9.1	10.0		
26.0		7.2	9.5	8.3	
28.0		5.7	7.7	8.1	
30.0			6.1	7.7	7.2
32.0			4.8	6.2	7.2
34.0				4.9	5.7
36.0				3.6	4.4
危険角度 (°)	66	67	68	69	70
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SF性能 31.8mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	16.5	18.0			
18.0	12.2	15.3	18.0		
20.0	9.0	11.7	14.2	16.0	
22.0	6.6	8.9	11.1	12.9	14.0
24.0		6.7	8.5	10.1	11.2
26.0			6.5	7.8	8.7
28.0			4.8	5.9	6.6
30.0				4.2	4.8
危険角度 (°)	65	66	66	67	67
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SF性能 31.8mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
9.0	12.0				
10.0	12.0				
11.0	12.0				
12.0	12.0				
14.0	12.0				
16.0	12.0				
18.0	12.0	12.0			
20.0	11.6	11.4			
22.0	9.1	10.7			
24.0	7.1	10.0	8.1		
26.0		8.1	7.9		
28.0		6.5	7.5		
30.0		5.1	7.2	6.3	
32.0			5.8	6.2	
34.0			4.6	6.0	5.4
36.0			3.5	4.9	5.4
38.0				3.9	4.7
40.0					3.6
危険角度 (°)	66	68	69	70	70
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【40.9mブーム時】

SA性能 40.9mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	48.0				
9.0	48.0				
10.0	48.0				
11.0	48.0	45.3			
12.0	48.0	43.0			
14.0	48.0	39.1	33.1	29.5	
16.0	43.6	35.8	30.8	27.7	26.2
18.0	38.8	33.0	28.7	26.2	25.0
20.0	34.7	30.5	27.0	24.8	23.9
22.0	31.2	28.4	25.4	23.6	22.9
24.0	28.1	26.5	24.0	22.5	22.1
26.0	25.3	24.8	22.7	21.5	21.3
28.0	22.8	22.7	21.5	20.6	20.6
30.0	20.6	20.6	20.4	19.8	
32.0	18.7	18.8	18.8	18.6	
34.0	16.7	17.1	17.1	17.1	
36.0	14.5	15.3	15.6	15.6	
38.0	12.6	13.3	13.7	13.8	
40.0	10.9	11.5	11.8		
42.0	9.4	9.9	10.1		
44.0	8.0	8.4	8.5		
46.0	6.7	7.0			
48.0	5.6	5.8			
危険角度 (°)	20	20	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SA性能 40.9mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0				
16.0	18.0				
18.0	18.0	18.0			
20.0	18.0	17.3			
22.0	18.0	16.5	13.2		
24.0	18.0	15.7	12.7		
26.0	17.0	15.0	12.3	10.7	
28.0	15.8	14.3	12.0	10.5	9.8
30.0	14.7	13.6	11.6	10.3	9.7
32.0	13.7	12.9	11.3	10.2	9.7
34.0	12.9	12.3	11.0	10.0	9.6
36.0	12.1	11.8	10.5	9.7	9.4
38.0	11.4	11.2	10.0	9.3	9.1
40.0	10.7	10.6	9.6	9.0	8.9
42.0	10.2	10.1	9.2	8.7	8.7
44.0	9.6	9.6	8.8	8.5	
46.0	9.1	9.2	8.5	8.2	
48.0	8.7	8.8	8.2	8.0	
50.0	7.8	8.4	8.0	7.9	
52.0	6.9	7.7	7.7		
54.0	6.0	6.7	7.3		
56.0	5.1	5.8	6.2		
58.0	4.3	4.9	5.2		
60.0		4.0			
危険角度 (°)	25	25	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SA性能 40.9mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0	18.0		
18.0	18.0	18.0	18.0	18.0	
20.0	18.0	18.0	18.0	18.0	17.7
22.0	18.0	18.0	18.0	18.0	16.9
24.0	18.0	18.0	18.0	17.1	16.3
26.0	18.0	18.0	17.8	16.4	15.7
28.0	18.0	18.0	16.9	15.7	15.2
30.0	18.0	17.9	16.1	15.1	14.7
32.0	18.0	16.9	15.3	14.5	14.3
34.0	17.2	16.0	14.7	14.0	14.0
36.0	15.8	15.2	14.0	13.5	
38.0	14.2	14.3	13.5	13.1	
40.0	12.4	13.2	13.0	12.7	
42.0	10.9	11.8	12.1	12.1	
44.0	9.5	10.2	10.8		
46.0	8.2	8.9	9.3		
48.0	7.0	7.6	7.9		
50.0	6.0	6.4	6.6		
52.0	5.0	5.4			
危険角度 (°)	22	22	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SA性能 40.9mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
10.0	15.0				
11.0	15.0				
12.0	15.0				
14.0	15.0				
16.0	15.0				
18.0	15.0	15.0			
20.0	15.0	14.0			
22.0	15.0	13.3			
24.0	15.0	12.7	10.0		
26.0	15.0	12.1	9.8		
28.0	14.4	11.6	9.4	8.1	
30.0	13.4	11.1	9.1	8.0	
32.0	12.5	10.6	8.9	7.8	7.0
34.0	11.7	10.2	8.6	7.7	7.0
36.0	10.9	9.8	8.4	7.5	7.0
38.0	10.3	9.5	8.2	7.4	7.0
40.0	9.7	9.2	8.0	7.3	7.0
42.0	9.1	8.9	7.8	7.2	7.0
44.0	8.6	8.6	7.7	7.2	7.0
46.0	8.2	8.4	7.6	7.1	7.0
48.0	7.7	8.2	7.4	7.1	
50.0	7.3	7.8	7.3	7.0	
52.0	7.0	7.5	7.0	6.8	
54.0	6.7	7.2	6.8	6.7	
56.0	6.1	6.9	6.6		
58.0	5.3	6.1	6.4		
60.0	4.6	5.2	5.7		
62.0	3.8	4.4	4.7		
64.0		3.6			
危険角度 (°)	25	25	30	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SA性能 40.9mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0	18.0			
16.0	18.0	18.0			
18.0	18.0	18.0			
20.0	18.0	18.0	18.0		
22.0	18.0	18.0	17.2	15.3	
24.0	18.0	18.0	16.2	14.5	13.5
26.0	18.0	17.7	15.3	13.8	13.0
28.0	18.0	16.6	14.5	13.3	12.5
30.0	17.1	15.7	13.8	13.0	12.1
32.0	16.0	14.8	13.1	12.5	11.8
34.0	15.1	14.0	12.5	12.0	11.4
36.0	14.2	13.2	12.0	11.3	11.1
38.0	13.4	12.6	11.5	10.9	10.9
40.0	12.7	12.0	11.0	10.6	
42.0	11.9	11.4	10.6	10.3	
44.0	10.5	10.9	10.2	10.0	
46.0	9.2	10.2	9.9	9.8	
48.0	8.0	8.9	9.5		
50.0	7.0	7.7	8.2		
52.0	6.0	6.6	7.0		
54.0	5.1	5.6	5.8		
56.0	4.3	4.7			
危険角度 (°)	20	23	30	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SA性能 40.9mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
11.0	12.0				
12.0	12.0				
14.0	12.0				
16.0	12.0				
18.0	12.0				
20.0	12.0	11.0			
22.0	12.0	11.0			
24.0	12.0	10.5			
26.0	12.0	10.0			
28.0	12.0	9.5	7.6		
30.0	11.8	9.1	7.4		
32.0	11.2	8.7	7.1	6.2	
34.0	10.5	8.3	6.9	6.0	
36.0	9.8	8.0	6.7	5.9	5.3
38.0	9.2	7.7	6.5	5.8	5.3
40.0	8.6	7.4	6.4	5.7	5.3
42.0	8.1	7.2	6.2	5.6	5.3
44.0	7.6	7.0	6.1	5.5	5.3
46.0	7.2	6.8	6.0	5.5	5.3
48.0	6.8	6.6	5.8	5.4	5.3
50.0	6.4	6.4	5.7	5.4	5.3
52.0	6.1	6.2	5.7	5.3	
54.0	5.8	6.1	5.6	5.3	
56.0	5.5	5.9	5.5	5.3	
58.0	5.3	5.8	5.4	5.3	
60.0	5.0	5.7	5.4		
62.0	4.6	5.4	5.4		
64.0	3.9	4.6	5.0		
66.0	3.2	3.8	4.1		
68.0	2.6	3.1			
70.0		2.4			
危険角度 (°)	18	18	30	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフィングブーム【40.9mブーム時】

SB性能 40.9mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	48.0				
9.0	48.0				
10.0	48.0				
11.0	48.0	45.3			
12.0	48.0	43.0			
14.0	48.0	39.1	33.1	29.5	
16.0	43.6	35.8	30.8	27.7	26.2
18.0	36.4	33.0	28.7	26.2	25.0
20.0	30.6	30.5	27.0	24.8	23.9
22.0	25.8	27.2	25.4	23.6	22.9
24.0	21.8	23.0	24.0	22.5	22.1
26.0	18.4	19.5	20.3	20.9	21.1
28.0	15.5	16.5	17.3	17.7	17.8
30.0	13.0	14.0	14.6	15.0	
32.0	10.8	11.8	12.4	12.7	
34.0	8.9	9.7	10.3	10.6	
36.0	7.2	7.9	8.4	8.6	
38.0	5.7	6.3	6.7	6.8	
40.0	4.2	4.8	5.1		
危険角度 (°)	38	40	41	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SB性能 40.9mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0				
16.0	18.0				
18.0	18.0	18.0			
20.0	18.0	17.3			
22.0	18.0	16.5	13.2		
24.0	18.0	15.7	12.7		
26.0	17.0	15.0	12.3	10.7	
28.0	15.8	14.3	12.0	10.5	9.8
30.0	14.7	13.6	11.6	10.3	9.7
32.0	13.7	12.9	11.3	10.2	9.7
34.0	12.0	12.3	11.0	10.0	9.6
36.0	10.5	11.8	10.5	9.7	9.4
38.0	9.1	10.4	10.0	9.3	9.1
40.0	7.7	9.1	9.6	9.0	8.9
42.0	6.5	7.9	8.9	8.7	8.7
44.0	5.3	6.7	7.7	8.3	
46.0	4.2	5.5	6.5	7.1	
48.0		4.4	5.3	5.8	
50.0			4.1	4.5	
危険角度 (°)	44	45	46	46	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SB性能 40.9mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0	18.0		
18.0	18.0	18.0	18.0	18.0	
20.0	18.0	18.0	18.0	18.0	17.7
22.0	18.0	18.0	18.0	18.0	16.9
24.0	18.0	18.0	18.0	17.1	16.3
26.0	18.0	18.0	17.8	16.4	15.7
28.0	16.8	18.0	16.9	15.7	15.2
30.0	14.4	15.7	16.1	15.1	14.7
32.0	12.3	13.5	14.4	14.5	14.3
34.0	10.4	11.6	12.4	13.0	13.2
36.0	8.7	9.9	10.7	11.1	
38.0	7.2	8.3	9.1	9.5	
40.0	5.8	6.8	7.5	8.0	
42.0	4.5	5.4	6.1	6.4	
44.0		4.1	4.6		
危険角度 (°)	41	41	43	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SB性能 40.9mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
10.0	15.0				
11.0	15.0				
12.0	15.0				
14.0	15.0				
16.0	15.0				
18.0	15.0	15.0			
20.0	15.0	14.0			
22.0	15.0	13.3			
24.0	15.0	12.7	10.0		
26.0	15.0	12.1	9.8		
28.0	14.4	11.6	9.4	8.1	
30.0	13.4	11.1	9.1	8.0	
32.0	12.5	10.6	8.9	7.8	7.0
34.0	11.7	10.2	8.6	7.7	7.0
36.0	10.9	9.8	8.4	7.5	7.0
38.0	10.0	9.5	8.2	7.4	7.0
40.0	8.8	9.2	8.0	7.3	7.0
42.0	7.6	8.9	7.8	7.2	7.0
44.0	6.5	7.9	7.7	7.2	7.0
46.0	5.4	6.9	7.6	7.1	7.0
48.0	4.3	5.8	6.8	7.1	
50.0	3.4	4.7	5.8	6.4	
52.0		3.7	4.6	5.2	
54.0			3.6	4.0	
危険角度 (°)	44	45	46	46	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SB性能 40.9mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0	18.0			
16.0	18.0	18.0			
18.0	18.0	18.0			
20.0	18.0	18.0	18.0		
22.0	18.0	18.0	17.2	15.3	
24.0	18.0	18.0	16.2	14.5	13.5
26.0	18.0	17.7	15.3	13.8	13.0
28.0	17.6	16.6	14.5	13.3	12.5
30.0	15.2	15.7	13.8	13.0	12.1
32.0	13.1	14.6	13.1	12.5	11.8
34.0	11.3	12.7	12.5	12.0	11.4
36.0	9.7	11.0	12.0	11.3	11.1
38.0	8.2	9.5	10.4	10.9	10.9
40.0	6.8	8.1	9.0	9.5	
42.0	5.6	6.8	7.7	8.2	
44.0	4.4	5.5	6.4	6.8	
46.0		4.3	5.0	5.3	
危険角度 (°)	42	43	46	47	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SB性能 40.9mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
11.0	12.0				
12.0	12.0				
14.0	12.0				
16.0	12.0				
18.0	12.0				
20.0	12.0	11.0			
22.0	12.0	11.0			
24.0	12.0	10.5			
26.0	12.0	10.0			
28.0	12.0	9.5	7.6		
30.0	11.8	9.1	7.4		
32.0	11.2	8.7	7.1	6.2	
34.0	10.5	8.3	6.9	6.0	
36.0	9.8	8.0	6.7	5.9	5.3
38.0	9.2	7.7	6.5	5.8	5.3
40.0	8.6	7.4	6.4	5.7	5.3
42.0	8.1	7.2	6.2	5.6	5.3
44.0	7.2	7.0	6.1	5.5	5.3
46.0	6.1	6.8	6.0	5.5	5.3
48.0	5.1	6.6	5.8	5.4	5.3
50.0	4.1	5.7	5.7	5.4	5.3
52.0	3.3	4.7	5.7	5.3	
54.0		3.8	4.9	5.3	
56.0		2.9	3.9	4.5	
58.0			3.0	3.4	
危険角度 (°)	44	45	46	46	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【40.9mブーム時】

SC性能 40.9mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	48.0				
9.0	48.0				
10.0	48.0				
11.0	48.0	45.3			
12.0	48.0	43.0			
14.0	41.9	39.1	33.1	29.5	
16.0	33.8	35.8	30.8	27.7	26.2
18.0	27.6	29.8	28.7	26.2	25.0
20.0	22.6	24.6	26.1	24.8	23.9
22.0	18.5	20.3	21.5	22.3	22.8
24.0	15.2	16.7	17.7	18.4	18.7
26.0	12.3	13.6	14.5	15.1	15.3
28.0	9.8	11.0	12.0	12.4	12.5
30.0	7.7	8.8	9.6	10.1	
32.0	5.8	6.8	7.5	7.9	
34.0	4.0	4.9	5.6	5.9	
危険角度 (°)	48	50	52	52	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SC性能 40.9mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0				
16.0	18.0				
18.0	18.0	18.0			
20.0	18.0	17.3			
22.0	18.0	16.5	13.2		
24.0	18.0	15.7	12.7		
26.0	15.4	15.0	12.3	10.7	
28.0	13.0	14.3	12.0	10.5	9.8
30.0	11.0	12.9	11.6	10.3	9.7
32.0	9.3	11.1	11.3	10.2	9.7
34.0	7.7	9.4	10.8	10.0	9.6
36.0	6.2	8.0	9.3	9.7	9.4
38.0	4.7	6.7	7.9	8.8	9.1
40.0		5.2	6.6	7.4	7.8
42.0			5.2	6.2	6.5
44.0				4.7	
危険角度 (°)	53	56	57	57	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SC性能 40.9mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0	18.0		
18.0	18.0	18.0	18.0	18.0	
20.0	18.0	18.0	18.0	18.0	17.7
22.0	18.0	18.0	18.0	18.0	16.9
24.0	16.7	18.0	18.0	17.1	16.3
26.0	13.8	15.5	16.9	16.4	15.7
28.0	11.4	12.9	14.2	15.1	15.2
30.0	9.2	10.8	11.9	12.7	13.1
32.0	7.4	8.8	9.9	10.6	10.9
34.0	5.7	7.1	8.2	8.8	8.9
36.0	4.0	5.4	6.5	7.1	
38.0			4.7	5.3	
危険角度 (°)	50	53	53	54	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SC性能 40.9mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
10.0	15.0				
11.0	15.0				
12.0	15.0				
14.0	15.0				
16.0	15.0				
18.0	15.0	15.0			
20.0	15.0	14.0			
22.0	15.0	13.3			
24.0	15.0	12.7	10.0		
26.0	15.0	12.1	9.8		
28.0	14.0	11.6	9.4	8.1	
30.0	11.9	11.1	9.1	8.0	
32.0	10.2	10.6	8.9	7.8	7.0
34.0	8.7	10.2	8.6	7.7	7.0
36.0	7.4	9.1	8.4	7.5	7.0
38.0	6.0	7.8	8.2	7.4	7.0
40.0	4.6	6.7	7.9	7.3	7.0
42.0	3.5	5.4	6.8	7.2	7.0
44.0		4.1	5.7	6.5	6.9
46.0			4.4	5.4	5.8
48.0				4.1	
危険角度 (°)	53	56	57	57	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SC性能 40.9mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0	18.0			
16.0	18.0	18.0			
18.0	18.0	18.0			
20.0	18.0	18.0	18.0		
22.0	18.0	18.0	17.2	15.3	
24.0	17.5	18.0	16.2	14.5	13.5
26.0	14.7	16.7	15.3	13.8	13.0
28.0	12.3	14.1	14.5	13.3	12.5
30.0	10.3	11.9	13.4	13.0	12.1
32.0	8.4	10.1	11.4	12.4	11.8
34.0	6.8	8.5	9.6	10.5	10.9
36.0	5.2	6.9	8.1	8.8	9.1
38.0		5.3	6.6	7.3	7.6
40.0			5.0	5.8	
42.0				4.2	
危険角度 (°)	53	54	55	55	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SC性能 40.9mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
11.0	12.0				
12.0	12.0				
14.0	12.0				
16.0	12.0				
18.0	12.0				
20.0	12.0	11.0			
22.0	12.0	11.0			
24.0	12.0	10.5			
26.0	12.0	10.0			
28.0	12.0	9.5	7.6		
30.0	11.8	9.1	7.4		
32.0	10.8	8.7	7.1	6.2	
34.0	9.3	8.3	6.9	6.0	
36.0	8.0	8.0	6.7	5.9	5.3
38.0	6.8	7.7	6.5	5.8	5.3
40.0	5.4	7.4	6.4	5.7	5.3
42.0	4.3	6.4	6.2	5.6	5.3
44.0	3.2	5.2	6.1	5.5	5.3
46.0		4.1	5.7	5.5	5.3
48.0			4.6	5.4	5.3
50.0			3.5	4.5	4.9
52.0				3.4	
危険角度 (°)	53	56	57	57	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【40.9mブーム時】

SD性能 40.9mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	48.0				
9.0	48.0				
10.0	48.0				
11.0	48.0	45.3			
12.0	46.3	43.0			
14.0	34.4	37.1	33.1	29.5	
16.0	26.4	28.6	30.5	27.7	26.2
18.0	20.6	22.5	24.1	25.3	25.0
20.0	16.3	17.8	19.2	20.2	20.8
22.0	12.9	14.2	15.4	16.2	16.6
24.0	10.1	11.3	12.3	13.0	13.3
26.0	7.5	8.9	9.8	10.3	10.5
28.0	5.1	6.5	7.5	8.1	8.2
30.0		4.2	5.1	5.7	
危険角度 (°)	56	57	58	59	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SD性能 40.9mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0				
16.0	18.0				
18.0	18.0	18.0			
20.0	18.0	17.3			
22.0	15.7	16.5	13.2		
24.0	12.9	15.5	12.7		
26.0	10.6	12.9	12.3	10.7	
28.0	8.7	10.8	12.0	10.5	9.8
30.0	6.9	9.0	10.7	10.3	9.7
32.0	5.1	7.4	8.9	10.2	9.7
34.0		5.8	7.4	8.6	9.3
36.0		4.3	6.1	7.1	7.7
38.0			4.6	5.8	6.3
40.0				4.3	4.8
危険角度 (°)	60	61	62	62	63
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SD性能 40.9mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0	18.0		
18.0	18.0	18.0	18.0	18.0	
20.0	17.5	18.0	18.0	18.0	17.7
22.0	14.1	16.1	17.9	18.0	16.9
24.0	11.3	13.1	14.7	15.9	16.3
26.0	9.1	10.7	12.0	13.1	13.7
28.0	6.8	8.6	9.8	10.7	11.2
30.0	4.8	6.6	7.9	8.7	9.1
32.0		4.6	6.0	6.9	7.2
34.0			4.1	4.9	5.1
危険角度 (°)	57	58	58	60	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SD性能 40.9mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
10.0	15.0				
11.0	15.0				
12.0	15.0				
14.0	15.0				
16.0	15.0				
18.0	15.0	15.0			
20.0	15.0	14.0			
22.0	15.0	13.3			
24.0	13.8	12.7	10.0		
26.0	11.5	12.1	9.8		
28.0	9.6	11.6	9.4	8.1	
30.0	8.0	10.1	9.1	8.0	
32.0	6.4	8.5	8.9	7.8	7.0
34.0	4.8	7.2	8.6	7.7	7.0
36.0		5.8	7.4	7.5	7.0
38.0		4.4	6.2	7.4	7.0
40.0			5.0	6.2	6.8
42.0			3.7	4.9	5.6
44.0					4.2
危険角度 (°)	60	61	62	62	63
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SD性能 40.9mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0	18.0			
16.0	18.0	18.0			
18.0	18.0	18.0			
20.0	18.0	18.0	18.0		
22.0	14.9	17.4	17.2	15.3	
24.0	12.2	14.4	16.2	14.5	13.5
26.0	9.9	11.9	13.6	13.8	13.0
28.0	8.0	9.8	11.3	12.6	12.5
30.0	5.9	8.0	9.4	10.5	11.2
32.0	4.1	6.2	7.7	8.7	9.2
34.0		4.5	6.1	7.1	7.5
36.0			4.4	5.4	5.9
38.0					4.1
危険角度 (°)	59	59	60	62	62
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SD性能 40.9mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
11.0	12.0				
12.0	12.0				
14.0	12.0				
16.0	12.0				
18.0	12.0				
20.0	12.0	11.0			
22.0	12.0	11.0			
24.0	12.0	10.5			
26.0	12.0	10.0			
28.0	10.2	9.5	7.6		
30.0	8.5	9.1	7.4		
32.0	7.1	8.7	7.1	6.2	
34.0	5.6	7.9	6.9	6.0	
36.0	4.2	6.7	6.7	5.9	5.3
38.0		5.5	6.5	5.8	5.3
40.0		4.2	6.1	5.7	5.3
42.0		3.1	5.0	5.6	5.3
44.0			3.8	5.2	5.3
46.0			2.7	4.0	4.8
48.0				2.9	3.4
危険角度 (°)	60	61	62	62	63
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【40.9mブーム時】

SE性能 40.9mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	48.0				
9.0	48.0				
10.0	48.0				
11.0	43.7	45.3			
12.0	37.2	41.5			
14.0	27.5	30.6	33.1	29.5	
16.0	20.2	22.5	24.6	26.2	26.2
18.0	14.9	16.9	18.6	19.9	20.7
20.0	11.1	12.7	14.2	15.2	15.8
22.0	7.8	9.5	10.7	11.6	12.0
24.0		6.5	8.0	8.7	9.0
26.0				5.9	6.2
危険角度 (°)	65	65	66	66	66
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SE性能 40.9mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0				
16.0	18.0				
18.0	18.0	18.0			
20.0	14.1	17.3			
22.0	11.0	14.1	13.2		
24.0	8.5	11.3	12.7		
26.0	6.3	9.0	11.2	10.7	
28.0		7.1	9.1	10.5	9.8
30.0			7.3	8.8	9.7
32.0			5.8	7.1	8.0
34.0				5.6	6.4
36.0					4.8
危険角度 (°)	67	69	69	70	70
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SE性能 40.9mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	18.0	18.0	18.0		
18.0	16.3	18.0	18.0	18.0	
20.0	12.4	14.9	17.1	18.0	17.7
22.0	9.4	11.5	13.4	14.9	16.0
24.0		8.9	10.5	11.8	12.6
26.0		6.4	8.1	9.2	9.9
28.0			5.9	7.1	7.6
30.0					5.4
危険角度 (°)	66	66	67	67	67
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SE性能 40.9mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
10.0	15.0				
11.0	15.0				
12.0	15.0				
14.0	15.0				
16.0	15.0				
18.0	15.0	15.0			
20.0	15.0	14.0			
22.0	12.1	13.3			
24.0	9.6	12.7	10.0		
26.0	7.5	10.3	9.8		
28.0		8.4	9.4	8.1	
30.0		6.8	8.8	8.0	
32.0			7.2	7.8	7.0
34.0			5.9	7.3	7.0
36.0			4.4	5.9	6.8
38.0				4.6	5.5
40.0					4.0
危険角度 (°)	67	69	69	70	70
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SE性能 40.9mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0	18.0			
16.0	18.0	18.0			
18.0	17.3	18.0			
20.0	13.3	16.3	18.0		
22.0	10.3	12.9	15.3	15.3	
24.0	7.7	10.2	12.2	14.0	13.5
26.0		7.9	9.8	11.3	12.4
28.0			7.7	9.0	9.9
30.0			5.8	7.1	7.9
32.0				5.3	6.1
危険角度 (°)	67	68	68	69	69
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SE性能 40.9mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
11.0	12.0				
12.0	12.0				
14.0	12.0				
16.0	12.0				
18.0	12.0				
20.0	12.0	11.0			
22.0	12.0	11.0			
24.0	10.2	10.5			
26.0	8.1	10.0			
28.0	6.3	9.3	7.6		
30.0		7.6	7.4		
32.0		6.2	7.1	6.2	
34.0			6.9	6.0	
36.0			5.6	5.9	5.3
38.0			4.3	5.8	5.3
40.0				4.8	5.3
42.0				3.5	4.6
44.0					3.2
危険角度 (°)	67	69	70	70	70
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【40.9mブーム時】

SF性能 40.9mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	48.0				
9.0	48.0				
10.0	40.6				
11.0	33.6	38.4			
12.0	28.1	32.4			
14.0	19.8	22.6	25.0	25.0	
16.0	13.9	16.1	18.1	19.6	20.5
18.0	9.5	11.6	13.2	14.4	15.1
20.0		8.2	9.6	10.6	11.1
22.0				7.6	8.0
危険角度 (°)	70	70	71	71	71
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SF性能 40.9mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0				
16.0	16.8				
18.0	12.6	16.5			
20.0	9.3	12.8			
22.0		9.9	12.6		
24.0		7.6	10.0		
26.0			7.9	9.7	
28.0			6.1	7.7	8.9
30.0				6.0	7.0
32.0					5.4
危険角度 (°)	72	73	74	75	75
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SF性能 40.9mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
8.0	18.0				
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0	18.0			
14.0	18.0	18.0			
16.0	15.3	18.0	18.0		
18.0	11.0	13.7	16.2	18.0	
20.0		10.2	12.3	14.0	15.1
22.0			9.3	10.7	11.7
24.0			6.9	8.1	8.9
26.0					6.6
危険角度 (°)	71	72	72	73	73
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SF性能 40.9mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
10.0	15.0				
11.0	15.0				
12.0	15.0				
14.0	15.0				
16.0	15.0				
18.0	13.7	15.0			
20.0	10.5	14.0			
22.0	7.8	11.3			
24.0		8.9	10.0		
26.0		7.0	9.4		
28.0			7.6	8.1	
30.0			6.0	7.7	
32.0				6.2	7.0
34.0				4.9	5.9
36.0					4.6
危険角度 (°)	72	73	74	75	75
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SF性能 40.9mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
9.0	18.0				
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0	18.0			
16.0	16.2	18.0			
18.0	11.9	15.2			
20.0	8.5	11.6	14.2		
22.0		8.8	11.0	12.9	
24.0			8.5	10.2	11.3
26.0			6.5	7.9	8.9
28.0				6.0	6.9
危険角度 (°)	71	72	73	74	74
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SF性能 40.9mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
11.0	12.0				
12.0	12.0				
14.0	12.0				
16.0	12.0				
18.0	12.0				
20.0	11.1	11.0			
22.0	8.5	11.0			
24.0		9.8			
26.0		7.8			
28.0		6.2	7.6		
30.0			7.1		
32.0			5.7	6.2	
34.0			4.5	6.0	
36.0				4.9	5.3
38.0					4.8
40.0					3.8
危険角度 (°)	72	73	74	75	75
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【50.0mブーム時】

SA性能 50.0mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
11.0	40.0				
12.0	40.0				
14.0	35.6	30.0			
16.0	31.6	27.1	25.0	22.0	
18.0	28.4	24.6	23.0	21.3	19.5
20.0	25.6	22.5	21.0	19.7	19.0
22.0	23.0	20.6	19.0	18.3	17.8
24.0	20.8	19.0	17.5	16.8	16.5
26.0	18.9	17.5	16.3	15.6	15.3
28.0	17.2	16.3	15.2	14.6	14.4
30.0	15.8	15.0	14.2	13.7	13.6
32.0	14.4	13.8	13.3	12.9	12.9
34.0	13.3	12.7	12.3	12.1	12.2
36.0	12.2	11.7	11.4	11.3	
38.0	11.2	10.8	10.6	10.5	
40.0	10.4	10.0	9.8	9.8	
42.0	9.5	9.3	9.1	9.1	
44.0	8.3	8.6	8.5	8.5	
46.0	7.0	7.5	7.8		
48.0	5.9	6.3	6.5		
50.0	4.8	5.2	5.3		
52.0		4.1	4.2		
危険角度 (°)	33	33	33	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SA性能 50.0mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
12.0	18.0				
14.0	18.0				
16.0	18.0				
18.0	18.0				
20.0	18.0	16.3			
22.0	18.0	15.0			
24.0	16.5	13.8	11.9		
26.0	15.1	12.8	11.1		
28.0	13.9	11.8	10.5	9.5	
30.0	12.7	11.0	9.8	8.9	8.5
32.0	11.7	10.2	9.2	8.5	8.1
34.0	10.9	9.5	8.6	8.0	7.7
36.0	10.1	8.9	8.1	7.6	7.3
38.0	9.3	8.3	7.6	7.1	7.0
40.0	8.7	7.7	7.1	6.7	6.6
42.0	8.1	7.2	6.7	6.4	6.3
44.0	7.5	6.8	6.3	6.1	6.0
46.0	7.0	6.4	6.0	5.7	5.8
48.0	6.5	6.0	5.6	5.4	
50.0	6.1	5.6	5.3	5.2	
52.0	5.6	5.3	5.0	4.9	
54.0	5.2	5.0	4.7	4.7	
56.0	4.8	4.7	4.5	4.5	
58.0	4.1	4.3	4.3	4.3	
60.0		4.0	4.0		
危険角度 (°)	37	38	40	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SA性能 50.0mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0				
16.0	18.0	18.0			
18.0	18.0	18.0			
20.0	18.0	18.0	17.2		
22.0	18.0	17.9	15.9	14.6	13.9
24.0	18.0	16.5	14.8	13.7	13.1
26.0	17.4	15.2	13.8	12.9	12.4
28.0	16.0	14.1	12.9	12.1	11.7
30.0	14.7	13.1	12.0	11.4	11.1
32.0	13.5	12.2	11.3	10.7	10.5
34.0	12.4	11.4	10.6	10.1	10.0
36.0	11.4	10.6	9.9	9.5	9.5
38.0	10.5	9.9	9.3	9.0	9.0
40.0	9.7	9.3	8.8	8.5	
42.0	9.0	8.6	8.3	8.1	
44.0	8.3	8.0	7.8	7.7	
46.0	7.7	7.4	7.2	7.2	
48.0	7.1	6.9	6.8	6.7	
50.0	6.0	6.4	6.3	6.3	
52.0	5.1	5.7	5.9		
54.0	4.1	4.7	5.0		
危険角度 (°)	34	36	37	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SA性能 50.0mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
14.0	15.0				
16.0	15.0				
18.0	15.0				
20.0	15.0				
22.0	15.0	13.6			
24.0	15.0	12.9			
26.0	14.7	12.3			
28.0	13.5	11.4	9.5		
30.0	12.5	10.6	9.2		
32.0	11.5	9.9	8.8	7.8	
34.0	10.7	9.3	8.3	7.6	7.1
36.0	9.9	8.7	7.8	7.2	6.9
38.0	9.2	8.1	7.4	6.9	6.6
40.0	8.6	7.6	6.9	6.5	6.3
42.0	8.0	7.1	6.5	6.2	6.0
44.0	7.4	6.7	6.2	5.8	5.7
46.0	6.9	6.3	5.8	5.5	5.5
48.0	6.5	5.9	5.5	5.2	5.2
50.0	6.1	5.5	5.2	5.0	5.0
52.0	5.7	5.2	4.9	4.7	
54.0	5.3	4.9	4.6	4.5	
56.0	5.0	4.6	4.4	4.3	
58.0	4.6	4.3	4.1	4.1	
60.0	4.3	4.1	3.9	3.9	
62.0	3.6	3.9	3.7	3.7	
64.0		3.6	3.5		
危険角度 (°)	37	38	40	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SA性能 50.0mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
11.0	18.0				
12.0	18.0				
14.0	18.0				
16.0	18.0				
18.0	18.0	18.0			
20.0	18.0	17.7			
22.0	18.0	16.3	14.2		
24.0	17.7	15.0	13.2	12.0	
26.0	16.2	13.9	12.3	11.3	10.7
28.0	14.8	12.8	11.5	10.7	10.2
30.0	13.6	11.9	10.8	10.0	9.7
32.0	12.6	11.1	10.1	9.5	9.2
34.0	11.6	10.3	9.5	8.9	8.7
36.0	10.8	9.6	8.9	8.4	8.3
38.0	10.0	9.0	8.3	8.0	7.9
40.0	9.3	8.4	7.9	7.5	7.5
42.0	8.6	7.9	7.4	7.1	7.2
44.0	7.9	7.4	7.0	6.8	
46.0	7.4	7.0	6.6	6.4	
48.0	6.8	6.5	6.2	6.1	
50.0	6.3	6.1	5.9	5.8	
52.0	5.8	5.6	5.5	5.5	
54.0	5.0	5.2	5.2	5.2	
56.0	4.1	4.8	4.8		
58.0		4.0	4.3		
危険角度 (°)	36	36	37	45	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SA性能 50.0mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
14.0	12.0				
16.0	12.0				
18.0	12.0				
20.0	12.0				
22.0	12.0				
24.0	12.0	10.5			
26.0	12.0	10.2			
28.0	12.0	9.7			
30.0	11.9	9.3	7.4		
32.0	10.9	8.9	7.2		
34.0	10.1	8.6	7.0	6.0	
36.0	9.4	8.1	6.8	5.9	
38.0	8.7	7.6	6.6	5.8	5.3
40.0	8.1	7.1	6.3	5.7	5.3
42.0	7.6	6.7	6.1	5.6	5.3
44.0	7.1	6.3	5.7	5.4	5.2
46.0	6.6	5.9	5.4	5.1	5.0
48.0	6.2	5.5	5.1	4.8	4.7
50.0	5.8	5.2	4.8	4.6	4.5
52.0	5.4	4.9	4.5	4.3	4.3
54.0	5.0	4.6	4.3	4.1	4.1
56.0	4.7	4.3	4.0	3.9	
58.0	4.4	4.1	3.8	3.7	
60.0	4.1	3.8	3.6	3.5	
62.0	3.9	3.6	3.4	3.4	
64.0	3.5	3.4	3.2	3.2	
66.0	2.9	3.2	3.1	3.1	
68.0		3.0	2.9		
70.0		2.5	2.7		
危険角度 (°)	36	36	38	45	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフィングブーム【50.0mブーム時】

SB性能 50.0mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
11.0	40.0				
12.0	40.0				
14.0	35.6	30.0			
16.0	31.6	27.1	25.0	22.0	
18.0	28.4	24.6	23.0	21.3	19.5
20.0	25.6	22.5	21.0	19.7	19.0
22.0	23.0	20.6	19.0	18.3	17.8
24.0	20.8	19.0	17.5	16.8	16.5
26.0	18.7	17.5	16.3	15.6	15.3
28.0	15.9	16.3	15.2	14.6	14.4
30.0	13.4	14.4	14.2	13.7	13.6
32.0	11.2	12.2	12.9	12.9	12.9
34.0	9.3	10.2	10.9	11.3	11.3
36.0	7.6	8.4	9.1	9.4	
38.0	6.0	6.8	7.4	7.7	
40.0	4.6	5.4	5.8	6.1	
42.0			4.4	4.5	
危険角度 (°)	48	49	49	49	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SB性能 50.0mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
12.0	18.0				
14.0	18.0				
16.0	18.0				
18.0	18.0				
20.0	18.0	16.3			
22.0	18.0	15.0			
24.0	16.5	13.8	11.9		
26.0	15.1	12.8	11.1		
28.0	13.9	11.8	10.5	9.5	
30.0	12.7	11.0	9.8	8.9	8.5
32.0	11.7	10.2	9.2	8.5	8.1
34.0	10.9	9.5	8.6	8.0	7.7
36.0	10.1	8.9	8.1	7.6	7.3
38.0	8.9	8.3	7.6	7.1	7.0
40.0	7.5	7.7	7.1	6.7	6.6
42.0	6.3	7.2	6.7	6.4	6.3
44.0	5.2	6.7	6.3	6.1	6.0
46.0	4.0	5.5	6.0	5.7	5.8
48.0		4.4	5.5	5.4	
50.0			4.4	5.0	
危険角度 (°)	51	53	54	55	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SB性能 50.0mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0				
16.0	18.0	18.0			
18.0	18.0	18.0			
20.0	18.0	18.0	17.2		
22.0	18.0	17.9	15.9	14.6	13.9
24.0	18.0	16.5	14.8	13.7	13.1
26.0	17.4	15.2	13.8	12.9	12.4
28.0	16.0	14.1	12.9	12.1	11.7
30.0	14.5	13.1	12.0	11.4	11.1
32.0	12.4	12.2	11.3	10.7	10.5
34.0	10.5	11.4	10.6	10.1	10.0
36.0	8.8	10.1	9.9	9.5	9.5
38.0	7.3	8.5	9.3	9.0	9.0
40.0	5.9	7.0	7.9	8.5	
42.0	4.6	5.7	6.5	7.0	
44.0		4.4	5.1	5.5	
46.0				4.1	
危険角度 (°)	50	50	51	51	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SB性能 50.0mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
14.0	15.0				
16.0	15.0				
18.0	15.0				
20.0	15.0				
22.0	15.0	13.6			
24.0	15.0	12.9			
26.0	14.7	12.3			
28.0	13.5	11.4	9.5		
30.0	12.5	10.6	9.2		
32.0	11.5	9.9	8.8	7.8	
34.0	10.7	9.3	8.3	7.6	7.1
36.0	9.9	8.7	7.8	7.2	6.9
38.0	9.2	8.1	7.4	6.9	6.6
40.0	8.6	7.6	6.9	6.5	6.3
42.0	7.4	7.1	6.5	6.2	6.0
44.0	6.3	6.7	6.2	5.8	5.7
46.0	5.1	6.3	5.8	5.5	5.5
48.0	4.1	5.7	5.5	5.2	5.2
50.0	3.1	4.6	5.2	5.0	5.0
52.0		3.7	4.8	4.7	
54.0			3.8	4.5	
危険角度 (°)	51	53	54	55	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SB性能 50.0mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
11.0	18.0				
12.0	18.0				
14.0	18.0				
16.0	18.0				
18.0	18.0	18.0			
20.0	18.0	17.7			
22.0	18.0	16.3	14.2		
24.0	17.7	15.0	13.2	12.0	
26.0	16.2	13.9	12.3	11.3	10.7
28.0	14.8	12.8	11.5	10.7	10.2
30.0	13.6	11.9	10.8	10.0	9.7
32.0	12.6	11.1	10.1	9.5	9.2
34.0	11.3	10.3	9.5	8.9	8.7
36.0	9.7	9.6	8.9	8.4	8.3
38.0	8.2	9.0	8.3	8.0	7.9
40.0	6.8	8.2	7.9	7.5	7.5
42.0	5.5	6.9	7.4	7.1	7.2
44.0	4.3	5.6	6.6	6.8	
46.0		4.4	5.4	6.0	
48.0			4.1	4.6	
危険角度 (°)	51	51	51	53	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SB性能 50.0mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
14.0	12.0				
16.0	12.0				
18.0	12.0				
20.0	12.0				
22.0	12.0				
24.0	12.0	10.5			
26.0	12.0	10.2			
28.0	12.0	9.7			
30.0	11.9	9.3	7.4		
32.0	10.9	8.9	7.2		
34.0	10.1	8.6	7.0	6.0	
36.0	9.4	8.1	6.8	5.9	
38.0	8.7	7.6	6.6	5.8	5.3
40.0	8.1	7.1	6.3	5.7	5.3
42.0	7.6	6.7	6.1	5.6	5.3
44.0	6.9	6.3	5.7	5.4	5.2
46.0	5.8	5.9	5.4	5.1	5.0
48.0	4.8	5.5	5.1	4.8	4.7
50.0	3.8	5.2	4.8	4.6	4.5
52.0	3.0	4.6	4.5	4.3	4.3
54.0		3.7	4.3	4.1	4.1
56.0			4.0	3.9	
58.0			3.1	3.7	
危険角度 (°)	51	53	54	55	60
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【50.0mブーム時】

SC性能 50.0mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
11.0	40.0				
12.0	40.0				
14.0	35.6	30.0			
16.0	31.6	27.1	25.0	22.0	
18.0	28.0	24.6	23.0	21.3	19.5
20.0	23.0	22.5	21.0	19.7	19.0
22.0	18.9	20.6	19.0	18.3	17.8
24.0	15.5	17.0	17.5	16.8	16.5
26.0	12.7	14.0	15.0	15.6	15.3
28.0	10.2	11.5	12.4	12.9	13.2
30.0	8.1	9.2	10.2	10.7	10.8
32.0	6.2	7.3	8.1	8.6	8.7
34.0	4.4	5.5	6.3	6.7	6.8
36.0			4.4	4.8	
危険角度 (°)	56	57	57	57	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SC性能 50.0mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
12.0	18.0				
14.0	18.0				
16.0	18.0				
18.0	18.0				
20.0	18.0	16.3			
22.0	18.0	15.0			
24.0	16.5	13.8	11.9		
26.0	15.1	12.8	11.1		
28.0	12.9	11.8	10.5	9.5	
30.0	10.9	11.0	9.8	8.9	8.5
32.0	9.1	10.2	9.2	8.5	8.1
34.0	7.5	9.4	8.6	8.0	7.7
36.0	6.0	7.9	8.1	7.6	7.3
38.0	4.6	6.6	7.6	7.1	7.0
40.0		5.2	6.7	6.7	6.6
42.0			5.4	6.4	6.3
44.0			4.1	5.1	5.6
危険角度 (°)	59	61	61	63	63
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SC性能 50.0mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0				
16.0	18.0	18.0			
18.0	18.0	18.0			
20.0	18.0	18.0	17.2		
22.0	18.0	17.9	15.9	14.6	13.9
24.0	16.8	16.5	14.8	13.7	13.1
26.0	13.9	15.2	13.8	12.9	12.4
28.0	11.5	13.1	12.9	12.1	11.7
30.0	9.4	10.9	12.0	11.4	11.1
32.0	7.5	9.1	10.2	10.7	10.5
34.0	5.8	7.3	8.5	9.1	9.5
36.0	4.2	5.7	6.8	7.6	7.8
38.0		4.1	5.2	5.9	6.1
40.0				4.2	
危険角度 (°)	57	57	59	59	60
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SC性能 50.0mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
14.0	15.0				
16.0	15.0				
18.0	15.0				
20.0	15.0				
22.0	15.0	13.6			
24.0	15.0	12.9			
26.0	14.7	12.3			
28.0	13.5	11.4	9.5		
30.0	11.8	10.6	9.2		
32.0	10.1	9.9	8.8	7.8	
34.0	8.6	9.3	8.3	7.6	7.1
36.0	7.2	8.7	7.8	7.2	6.9
38.0	5.8	7.7	7.4	6.9	6.6
40.0	4.4	6.6	6.9	6.5	6.3
42.0		5.3	6.5	6.2	6.0
44.0		4.1	5.8	5.8	5.7
46.0			4.5	5.5	5.5
48.0			3.4	4.4	4.9
危険角度 (°)	59	61	61	63	63
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SC性能 50.0mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
11.0	18.0				
12.0	18.0				
14.0	18.0				
16.0	18.0				
18.0	18.0	18.0			
20.0	18.0	17.7			
22.0	18.0	16.3	14.2		
24.0	17.5	15.0	13.2	12.0	
26.0	14.6	13.9	12.3	11.3	10.7
28.0	12.3	12.8	11.5	10.7	10.2
30.0	10.2	11.9	10.8	10.0	9.7
32.0	8.4	10.1	10.1	9.5	9.2
34.0	6.7	8.5	9.5	8.9	8.7
36.0	5.2	7.0	8.2	8.4	8.3
38.0		5.4	6.8	7.6	7.9
40.0		4.0	5.3	6.2	6.6
42.0				4.7	5.0
危険角度 (°)	58	59	61	61	61
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SC性能 50.0mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
14.0	12.0				
16.0	12.0				
18.0	12.0				
20.0	12.0				
22.0	12.0				
24.0	12.0	10.5			
26.0	12.0	10.2			
28.0	12.0	9.7			
30.0	11.9	9.3	7.4		
32.0	10.6	8.9	7.2		
34.0	9.1	8.6	7.0	6.0	
36.0	7.8	8.1	6.8	5.9	
38.0	6.5	7.6	6.6	5.8	5.3
40.0	5.1	7.1	6.3	5.7	5.3
42.0	4.0	6.4	6.1	5.6	5.3
44.0		5.1	5.7	5.4	5.2
46.0		3.9	5.4	5.1	5.0
48.0			4.6	4.8	4.7
50.0			3.5	4.6	4.5
52.0				3.7	4.2
危険角度 (°)	59	61	61	63	63
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフィングブーム【50.0mブーム時】

SD性能 50.0mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
11.0	40.0				
12.0	40.0				
14.0	34.8	30.0			
16.0	26.7	27.1	25.0	22.0	
18.0	20.9	22.8	23.0	21.3	19.5
20.0	16.6	18.2	19.5	19.7	19.0
22.0	13.2	14.6	15.7	16.6	17.1
24.0	10.4	11.7	12.7	13.4	13.8
26.0	8.0	9.3	10.2	10.8	11.1
28.0	5.6	7.0	8.1	8.6	8.9
30.0			5.8	6.4	6.7
危険角度 (°)	63	64	64	64	64
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SD性能 50.0mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
12.0	18.0				
14.0	18.0				
16.0	18.0				
18.0	18.0				
20.0	18.0	16.3			
22.0	15.5	15.0			
24.0	12.8	13.8	11.9		
26.0	10.5	12.8	11.1		
28.0	8.6	10.7	10.5	9.5	
30.0	6.8	8.9	9.8	8.9	8.5
32.0		7.4	9.0	8.5	8.1
34.0		5.8	7.5	8.0	7.7
36.0			6.2	7.2	7.3
38.0			4.6	6.0	6.6
40.0				4.5	5.3
危険角度 (°)	66	67	67	68	68
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SD性能 50.0mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0				
16.0	18.0	18.0			
18.0	18.0	18.0			
20.0	17.6	18.0	17.2		
22.0	14.2	16.3	15.9	14.6	13.9
24.0	11.4	13.3	14.8	13.7	13.1
26.0	9.2	10.8	12.2	12.9	12.4
28.0	7.0	8.8	10.0	11.0	11.6
30.0		6.8	8.2	9.0	9.5
32.0			6.3	7.3	7.7
34.0				5.4	5.9
危険角度 (°)	64	65	65	65	65
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SD性能 50.0mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
14.0	15.0				
16.0	15.0				
18.0	15.0				
20.0	15.0				
22.0	15.0	13.6			
24.0	13.7	12.9			
26.0	11.4	12.3			
28.0	9.5	11.4	9.5		
30.0	7.8	10.1	9.2		
32.0	6.2	8.5	8.8	7.8	
34.0		7.1	8.3	7.6	7.1
36.0		5.7	7.5	7.2	6.9
38.0			6.3	6.9	6.6
40.0			5.0	6.3	6.3
42.0			3.7	5.2	5.8
44.0				3.9	4.6
危険角度 (°)	66	67	67	68	68
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SD性能 50.0mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
11.0	18.0				
12.0	18.0				
14.0	18.0				
16.0	18.0				
18.0	18.0	18.0			
20.0	18.0	17.7			
22.0	14.9	16.3	14.2		
24.0	12.1	14.4	13.2	12.0	
26.0	9.9	11.9	12.3	11.3	10.7
28.0	8.0	9.8	11.4	10.7	10.2
30.0	5.9	8.0	9.5	10.0	9.7
32.0		6.3	7.8	8.9	9.2
34.0			6.3	7.3	7.8
36.0			4.6	5.8	6.4
38.0					4.7
危険角度 (°)	65	66	66	67	67
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SD性能 50.0mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
14.0	12.0				
16.0	12.0				
18.0	12.0				
20.0	12.0				
22.0	12.0				
24.0	12.0	10.5			
26.0	11.9	10.2			
28.0	10.0	9.7			
30.0	8.3	9.3	7.4		
32.0	6.9	8.9	7.2		
34.0	5.3	7.8	7.0	6.0	
36.0		6.6	6.8	5.9	
38.0		5.3	6.6	5.8	5.3
40.0			6.1	5.7	5.3
42.0			5.0	5.6	5.3
44.0			3.8	5.3	5.2
46.0				4.1	5.0
48.0					3.8
危険角度 (°)	66	67	67	68	68
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【50.0mブーム時】

SE性能 50.0mブーム+2.3m+10mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
11.0	40.0				
12.0	35.2				
14.0	26.1	29.4			
16.0	19.6	22.4	24.9	22.0	
18.0	14.6	17.0	19.0	20.3	19.5
20.0	10.7	12.8	14.5	15.6	16.3
22.0		9.5	11.1	12.0	12.6
24.0			8.1	9.2	9.6
危険角度 (°)	70	71	71	71	71
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SE性能 50.0mブーム+2.3m+23mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
12.0	18.0				
14.0	18.0				
16.0	18.0				
18.0	16.8				
20.0	13.2	16.3			
22.0	10.2	14.0			
24.0		11.1	11.9		
26.0		8.7	11.1		
28.0			9.1	9.5	
30.0			7.3	8.9	8.5
32.0				7.2	8.1
34.0				5.7	6.6
36.0					5.2
危険角度 (°)	72	73	74	74	74
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SE性能 50.0mブーム+2.3m+15mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0				
16.0	18.0	18.0			
18.0	15.6	18.0			
20.0	11.8	14.9	17.2		
22.0	8.8	11.5	13.6	14.6	13.9
24.0		8.7	10.7	12.0	12.9
26.0			8.2	9.5	10.2
28.0				7.4	8.0
危険角度 (°)	71	72	72	72	73
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SE性能 50.0mブーム+2.3m+27mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
14.0	15.0				
16.0	15.0				
18.0	15.0				
20.0	14.3				
22.0	11.3	13.6			
24.0	8.8	12.6			
26.0		10.3			
28.0		8.2	9.5		
30.0			8.8		
32.0			7.2	7.8	
34.0			5.8	7.4	7.1
36.0				6.0	6.9
38.0					5.7
40.0					4.4
危険角度 (°)	72	73	74	74	74
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SE性能 50.0mブーム+2.3m+19mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
11.0	18.0				
12.0	18.0				
14.0	18.0				
16.0	18.0				
18.0	16.3	18.0			
20.0	12.6	16.3			
22.0	9.5	12.8	14.2		
24.0		10.0	12.3	12.0	
26.0		7.6	9.8	11.3	10.7
28.0			7.8	9.2	10.1
30.0				7.3	8.1
32.0					6.4
危険角度 (°)	72	72	73	73	73
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SE性能 50.0mブーム+2.3m+31mSLブーム

オフセット 作業半径 (m)	0° 荷重 (ton)	15° 荷重 (ton)	30° 荷重 (ton)	45° 荷重 (ton)	60° 荷重 (ton)
14.0	12.0				
16.0	12.0				
18.0	12.0				
20.0	12.0				
22.0	11.8				
24.0	9.4	10.5			
26.0	7.3	10.2			
28.0		9.1			
30.0		7.3	7.4		
32.0		5.8	7.2		
34.0			6.8	6.0	
36.0			5.6	5.9	
38.0				5.8	5.3
40.0				4.9	5.3
42.0					4.7
危険角度 (°)	72	73	74	75	75
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



10m — 31m

スーパーラフティングブーム【50.0mブーム時】

SF性能 50.0mブーム+2.3m+10mSLブーム

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
11.0	31.4				
12.0	26.5				
14.0	18.8	22.1			
16.0	13.3	16.0	18.4	18.4	
18.0		11.5	13.5	14.8	15.5
20.0			9.7	11.0	11.6
危険角度 (°)	74	75	75	75	76
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SF性能 50.0mブーム+2.3m+23mSLブーム

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
12.0	18.0				
14.0	18.0				
16.0	15.5				
18.0	11.5				
20.0		12.7			
22.0		9.7			
24.0			9.9		
26.0			7.9		
28.0				7.7	
30.0					7.1
危険角度 (°)	76	77	78	79	79
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SF性能 50.0mブーム+2.3m+15mSLブーム

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
10.0	18.0				
11.0	18.0				
12.0	18.0				
14.0	18.0				
16.0	14.3	18.0			
18.0		13.6			
20.0		10.0	12.4		
22.0			9.4	10.9	10.9
24.0				8.3	9.2
危険角度 (°)	75	76	76	77	77
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SF性能 50.0mブーム+2.3m+27mSLブーム

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
14.0	15.0				
16.0	15.0				
18.0	12.7				
20.0					
22.0		11.2			
24.0		8.8			
26.0					
28.0			7.6		
30.0					
32.0				6.2	
34.0					6.0
危険角度 (°)	76	77	78	79	79
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2

SF性能 50.0mブーム+2.3m+19mSLブーム

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
11.0	18.0				
12.0	18.0				
14.0	18.0				
16.0	14.9				
18.0	10.9	15.1			
20.0		11.4			
22.0		8.4	11.1		
24.0			8.6	10.2	
26.0				8.0	9.1
28.0					7.1
危険角度 (°)	75	76	77	78	78
フック種類	83t	83t	83t	83t	83t
フック質量 (t)	1.35	1.35	1.35	1.35	1.35
掛数	4	4	4	4	4

SF性能 50.0mブーム+2.3m+31mSLブーム

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
14.0	12.0				
16.0	12.0				
18.0	12.0				
20.0	10.0				
22.0					
24.0		9.7			
26.0		7.6			
28.0					
30.0			7.0		
32.0					
34.0				6.0	
36.0					
38.0					4.9
危険角度 (°)	76	77	78	79	79
フック種類	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
掛数	2	2	2	2	2



エクステンションジブ【13.6mブーム時】

EA性能 13.6mブーム+2.3m+10mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
5.0	7.00				
6.0	7.00				
7.0	7.00				
8.0	7.00				
9.0	7.00				
10.0	7.00	5.00			
11.0	7.00	5.00			
12.0	7.00	5.00			
14.0	7.00	5.00	2.90		
16.0	7.00	5.00	2.80		
18.0	6.65	5.00	2.80	2.00	
20.0	6.05	5.00	2.80	2.00	1.60
22.0	5.55	4.90	2.80	2.00	1.60
24.0	5.15	4.60	2.80	2.00	1.60
危険角度 (°)	44	52	57	64	68
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1

EB性能 13.6mブーム+2.3m+10mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
5.0	7.00				
6.0	7.00				
7.0	7.00				
8.0	7.00				
9.0	7.00				
10.0	7.00	5.00			
11.0	7.00	5.00			
12.0	7.00	5.00			
14.0	7.00	5.00	2.80		
16.0	7.00	5.00	2.80		
18.0	6.65	5.00	2.80	2.00	
20.0	6.05	5.00	2.80	2.00	1.60
22.0		4.90	2.80	2.00	1.60
危険角度 (°)	54	58	64	69	72
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1

EA性能 13.6mブーム+2.3m+31mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
10.0	7.00				
11.0	7.00				
12.0	7.00				
14.0	7.00				
16.0	7.00				
18.0	6.60	5.00			
20.0	5.95	4.85			
22.0	5.35	4.45			
24.0	4.85	4.10			
26.0	4.45	3.80			
28.0	4.10	3.50	2.80		
30.0	3.75	3.25	2.80		
32.0	3.45	3.05	2.65		
34.0	3.20	2.85	2.50	2.00	
36.0	3.00	2.65	2.35	2.00	
38.0	2.80	2.50	2.25	2.00	
40.0	2.60	2.35	2.10	1.90	1.60
42.0		2.20	2.00	1.85	1.60
44.0			1.90	1.80	1.60
危険角度 (°)	44	52	57	64	68
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1

EB性能 13.6mブーム+2.3m+31mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
10.0	7.00				
11.0	7.00				
12.0	7.00				
14.0	7.00				
16.0	7.00				
18.0	6.60	5.00			
20.0	5.95	4.85			
22.0	5.35	4.45			
24.0	4.85	4.10			
26.0	4.45	3.80			
28.0	4.10	3.50	2.80		
30.0	3.75	3.25	2.80		
32.0	3.45	3.05	2.65		
34.0		2.85	2.50	2.00	
36.0		2.65	2.35	2.00	
38.0		2.50	2.25	2.00	
40.0			2.10	1.90	1.60
42.0				1.85	1.60
危険角度 (°)	54	58	64	69	72
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1



エクステンションジブ【13.6mブーム時】

EC性能 13.6mブーム+2.3m+10mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
5.0	7.00				
6.0	7.00				
7.0	7.00				
8.0	7.00				
9.0	7.00				
10.0	7.00	5.00			
11.0	7.00	5.00			
12.0	7.00	5.00			
14.0	7.00	5.00	2.80		
16.0	7.00	5.00	2.80		
18.0		5.00	2.80	2.00	
20.0			2.80	2.00	1.60
22.0					1.60
危険角度 (°)	62	65	69	75	78
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1

ED性能 13.6mブーム+2.3m+10mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
5.0	7.00				
6.0	7.00				
7.0	7.00				
8.0	7.00				
9.0	7.00				
10.0	7.00	5.00			
11.0	7.00	5.00			
12.0	7.00	5.00			
14.0		5.00	2.80		
16.0		5.00	2.80		
18.0			2.80	2.00	
20.0					1.60
危険角度 (°)	69	70	74	78	80
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1

EC性能 13.6mブーム+2.3m+31mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
10.0	7.00				
11.0	7.00				
12.0	7.00				
14.0	7.00				
16.0	7.00				
18.0	6.60	5.00			
20.0	5.95	4.85			
22.0	5.35	4.45			
24.0	4.85	4.10			
26.0	4.45	3.80			
28.0		3.50	2.80		
30.0		3.25	2.80		
32.0		3.05	2.65		
34.0			2.50	2.00	
36.0			2.35	2.00	
38.0				2.00	
40.0					1.60
42.0					1.60
危険角度 (°)	62	65	69	75	78
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1

ED性能 13.6mブーム+2.3m+31mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
10.0	7.00				
11.0	7.00				
12.0	7.00				
14.0	7.00				
16.0	7.00				
18.0	6.60	5.00			
20.0	5.95	4.85			
22.0		4.45			
24.0		4.10			
26.0		3.80			
28.0		3.50	2.80		
30.0			2.80		
32.0			2.65		
34.0				2.00	
36.0				2.00	
38.0					
40.0					1.60
危険角度 (°)	69	70	74	78	80
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1



エクステンションジブ【13.6mブーム時】

EE性能 13.6mブーム+2.3m+10mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
5.0	7.00				
6.0	7.00				
7.0	7.00				
8.0	7.00				
9.0	7.00				
10.0		5.00			
11.0		5.00			
12.0		5.00			
14.0			2.80		
16.0			2.80		
18.0				2.00	
20.0					1.60
危険角度 (°)	74	76	77	81	81
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1

EF性能 13.6mブーム+2.3m+10mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
5.0	7.00				
6.0	7.00				
7.0	7.00				
8.0					
9.0					
10.0		5.00			
11.0		5.00			
12.0					
14.0			2.80		
16.0					
18.0				2.00	
20.0					1.60
危険角度 (°)	78	79	81	82	82
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1

EE性能 13.6mブーム+2.3m+31mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
10.0	7.00				
11.0	7.00				
12.0	7.00				
14.0	7.00				
16.0					
18.0		5.00			
20.0		4.85			
22.0		4.45			
24.0					
26.0					
28.0			2.80		
30.0			2.80		
32.0					
34.0				2.00	
36.0					
38.0					
40.0					1.60
危険角度 (°)	74	76	77	81	81
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1

EF性能 13.6mブーム+2.3m+31mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
10.0	7.00				
11.0	7.00				
12.0	7.00				
14.0					
16.0					
18.0		5.00			
20.0		4.85			
22.0					
24.0					
26.0					
28.0			2.80		
30.0					
32.0					
34.0				2.00	
36.0					
38.0					
40.0					1.60
危険角度 (°)	78	79	81	82	82
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1



エクステンションジブ【50.0mブーム時】

EA性能 50.0mブーム+2.3m+10mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
10.0	7.00				
11.0	7.00				
12.0	7.00				
14.0	7.00				
16.0	7.00	5.00			
18.0	7.00	5.00			
20.0	7.00	5.00	2.80		
22.0	7.00	5.00	2.80		
24.0	7.00	5.00	2.80	2.00	
26.0	7.00	5.00	2.80	2.00	1.60
28.0	7.00	5.00	2.80	2.00	1.60
30.0	7.00	5.00	2.80	2.00	1.60
32.0	7.00	5.00	2.80	2.00	1.60
34.0	6.95	5.00	2.80	2.00	1.60
36.0	6.60	5.00	2.80	2.00	1.60
38.0	6.30	4.95	2.80	2.00	1.60
40.0	6.00	4.80	2.80	2.00	
42.0	5.75	4.65	2.80		
44.0	5.50	4.50	2.80		
46.0	5.25	4.35	2.80		
48.0	5.05	4.25			
50.0	4.85				
52.0	4.70				
危険角度 (°)	44	52	57	64	68
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1

EA性能 50.0mブーム+2.3m+31mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
12.0	7.00				
14.0	7.00				
16.0	7.00				
18.0	7.00				
20.0	7.00				
22.0	7.00	5.00			
24.0	7.00	4.70			
26.0	6.55	4.45			
28.0	6.15	4.20			
30.0	5.80	4.00			
32.0	5.45	3.80	2.80		
34.0	5.10	3.60	2.75		
36.0	4.80	3.40	2.60		
38.0	4.55	3.20	2.55	2.00	
40.0	4.30	3.05	2.45	2.00	
42.0	4.05	2.90	2.35	1.90	
44.0	3.85	2.75	2.25	1.90	1.60
46.0	3.65	2.65	2.20	1.85	1.60
48.0	3.45	2.55	2.15	1.80	1.60
50.0	3.25	2.45	2.05	1.75	1.60
52.0	3.05	2.35	2.00	1.70	1.60
54.0	2.85	2.25	1.95	1.70	1.60
56.0	2.70	2.15	1.90	1.65	1.60
58.0	2.55	2.05	1.85	1.65	1.60
60.0	2.40	1.95	1.80	1.60	
62.0	2.20	1.85	1.75		
64.0	1.95	1.75	1.65		
66.0	1.65				
危険角度 (°)	44	52	57	64	68
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1

EB性能 50.0mブーム+2.3m+10mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
10.0	7.00				
11.0	7.00				
12.0	7.00				
14.0	7.00				
16.0	7.00	5.00			
18.0	7.00	5.00			
20.0	7.00	5.00	2.80		
22.0	7.00	5.00	2.80		
24.0	7.00	5.00	2.80	2.00	
26.0	7.00	5.00	2.80	2.00	1.60
28.0	7.00	5.00	2.80	2.00	1.60
30.0	7.00	5.00	2.80	2.00	1.60
32.0	7.00	5.00	2.80	2.00	1.60
34.0	6.95	5.00	2.80	2.00	1.60
36.0	6.60	5.00	2.80	2.00	
38.0	6.30	4.95	2.80		
40.0	6.00	4.80			
42.0	5.75	4.65			
危険角度 (°)	54	58	64	69	72
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1

EB性能 50.0mブーム+2.3m+31mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
12.0	7.00				
14.0	7.00				
16.0	7.00				
18.0	7.00				
20.0	7.00				
22.0	7.00	5.00			
24.0	7.00	4.70			
26.0	6.55	4.45			
28.0	6.15	4.20			
30.0	5.80	4.00			
32.0	5.45	3.80	2.80		
34.0	5.10	3.60	2.75		
36.0	4.80	3.40	2.60		
38.0	4.55	3.20	2.55	2.00	
40.0	4.30	3.05	2.45	2.00	
42.0	4.05	2.90	2.35	1.90	
44.0	3.85	2.75	2.25	1.90	1.60
46.0	3.65	2.65	2.20	1.85	1.60
48.0	3.35	2.55	2.15	1.80	1.60
50.0	2.95	2.45	2.05	1.75	1.60
52.0	2.50	2.25	2.00	1.70	1.60
54.0	2.00	1.95	1.85	1.60	1.60
56.0		1.60	1.60		
危険角度 (°)	54	58	64	69	72
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1



エクステンションジブ【50.0mブーム時】

EC性能 50.0mブーム+2.3m+10mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
10.0	7.00				
11.0	7.00				
12.0	7.00				
14.0	7.00				
16.0	7.00	5.00			
18.0	7.00	5.00			
20.0	7.00	5.00	2.80		
22.0	7.00	5.00	2.80		
24.0	7.00	5.00	2.80	2.00	
26.0	7.00	5.00	2.80	2.00	1.60
28.0	7.00	5.00	2.80	2.00	1.60
30.0	7.00	5.00	2.80	2.00	1.60
32.0	7.00	5.00	2.80		
34.0	6.65	5.00	2.80		
危険角度 (°)	62	65	69	75	76
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1

ED性能 50.0mブーム+2.3m+10mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
10.0	7.00				
11.0	7.00				
12.0	7.00				
14.0	7.00				
16.0	7.00	5.00			
18.0	7.00	5.00			
20.0	7.00	5.00	2.80		
22.0	7.00	5.00	2.80		
24.0	7.00	5.00	2.80	2.00	
26.0	7.00	5.00	2.80	2.00	1.60
28.0		5.00	2.80		
危険角度 (°)	69	70	74	78	80
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1

EC性能 50.0mブーム+2.3m+31mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
12.0	7.00				
14.0	7.00				
16.0	7.00				
18.0	7.00				
20.0	7.00				
22.0	7.00	5.00			
24.0	7.00	4.70			
26.0	6.55	4.45			
28.0	6.15	4.20			
30.0	5.80	4.00			
32.0	5.45	3.80	2.80		
34.0	5.10	3.60	2.75		
36.0	4.80	3.40	2.60		
38.0	4.50	3.20	2.55	2.00	
40.0	4.05	3.05	2.45	2.00	
42.0	3.50	2.90	2.35	1.90	
44.0	2.85	2.70	2.25	1.90	1.60
46.0		2.35	2.15	1.85	1.60
48.0		1.95	1.90	1.75	1.60
50.0			1.60		1.60
危険角度 (°)	62	65	69	75	76
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1

ED性能 50.0mブーム+2.3m+31mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
12.0	7.00				
14.0	7.00				
16.0	7.00				
18.0	7.00				
20.0	7.00				
22.0	7.00	5.00			
24.0	7.00	4.70			
26.0	6.55	4.45			
28.0	6.15	4.20			
30.0	5.80	4.00			
32.0	5.35	3.80	2.80		
34.0	4.70	3.60	2.75		
36.0		3.40	2.60		
38.0		3.10	2.55	2.00	
40.0		2.70	2.45	2.00	
42.0		2.20	2.20	1.90	
44.0			1.85	1.70	1.60
46.0					1.60
危険角度 (°)	69	70	74	78	80
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1



エクステンションジブ【50.0mブーム時】

EE性能 50.0mブーム+2.3m+10mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
10.0	7.00				
11.0	7.00				
12.0	7.00				
14.0	7.00				
16.0	7.00	5.00			
18.0	7.00	5.00			
20.0	7.00	5.00	2.80		
22.0		5.00	2.80		
24.0				2.00	
26.0					1.60
危険角度 (°)	74	76	77	81	81
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1

EF性能 50.0mブーム+2.3m+10mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
10.0	7.00				
11.0	7.00				
12.0	7.00				
14.0	7.00				
16.0		5.00			
18.0		5.00			
20.0			2.80		
22.0					
24.0				2.00	
26.0					1.60
危険角度 (°)	78	79	81	82	82
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1

EE性能 50.0mブーム+2.3m+31mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
12.0	7.00				
14.0	7.00				
16.0	7.00				
18.0	7.00				
20.0	7.00				
22.0	7.00	5.00			
24.0	7.00	4.70			
26.0	6.45	4.45			
28.0		4.20			
30.0		4.00			
32.0		3.70	2.80		
34.0			2.75		
36.0			2.55		
38.0			2.20	2.00	
40.0				2.00	
42.0					
44.0					1.60
46.0					1.60
危険角度 (°)	74	76	77	81	81
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1

EF性能 50.0mブーム+2.3m+31mSLブーム+EXジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)	荷重 (ton)
12.0	7.00				
14.0	7.00				
16.0	7.00				
18.0	7.00				
20.0	7.00				
22.0		5.00			
24.0		4.70			
26.0		4.45			
28.0		4.10			
30.0					
32.0			2.80		
34.0			2.45		
36.0					
38.0				2.00	
40.0				2.00	
42.0					
44.0					1.60
危険角度 (°)	78	79	81	82	82
フック種類	12t	12t	12t	12t	12t
フック質量 (t)	0.53	0.53	0.53	0.53	0.53
掛数	1	1	1	1	1