
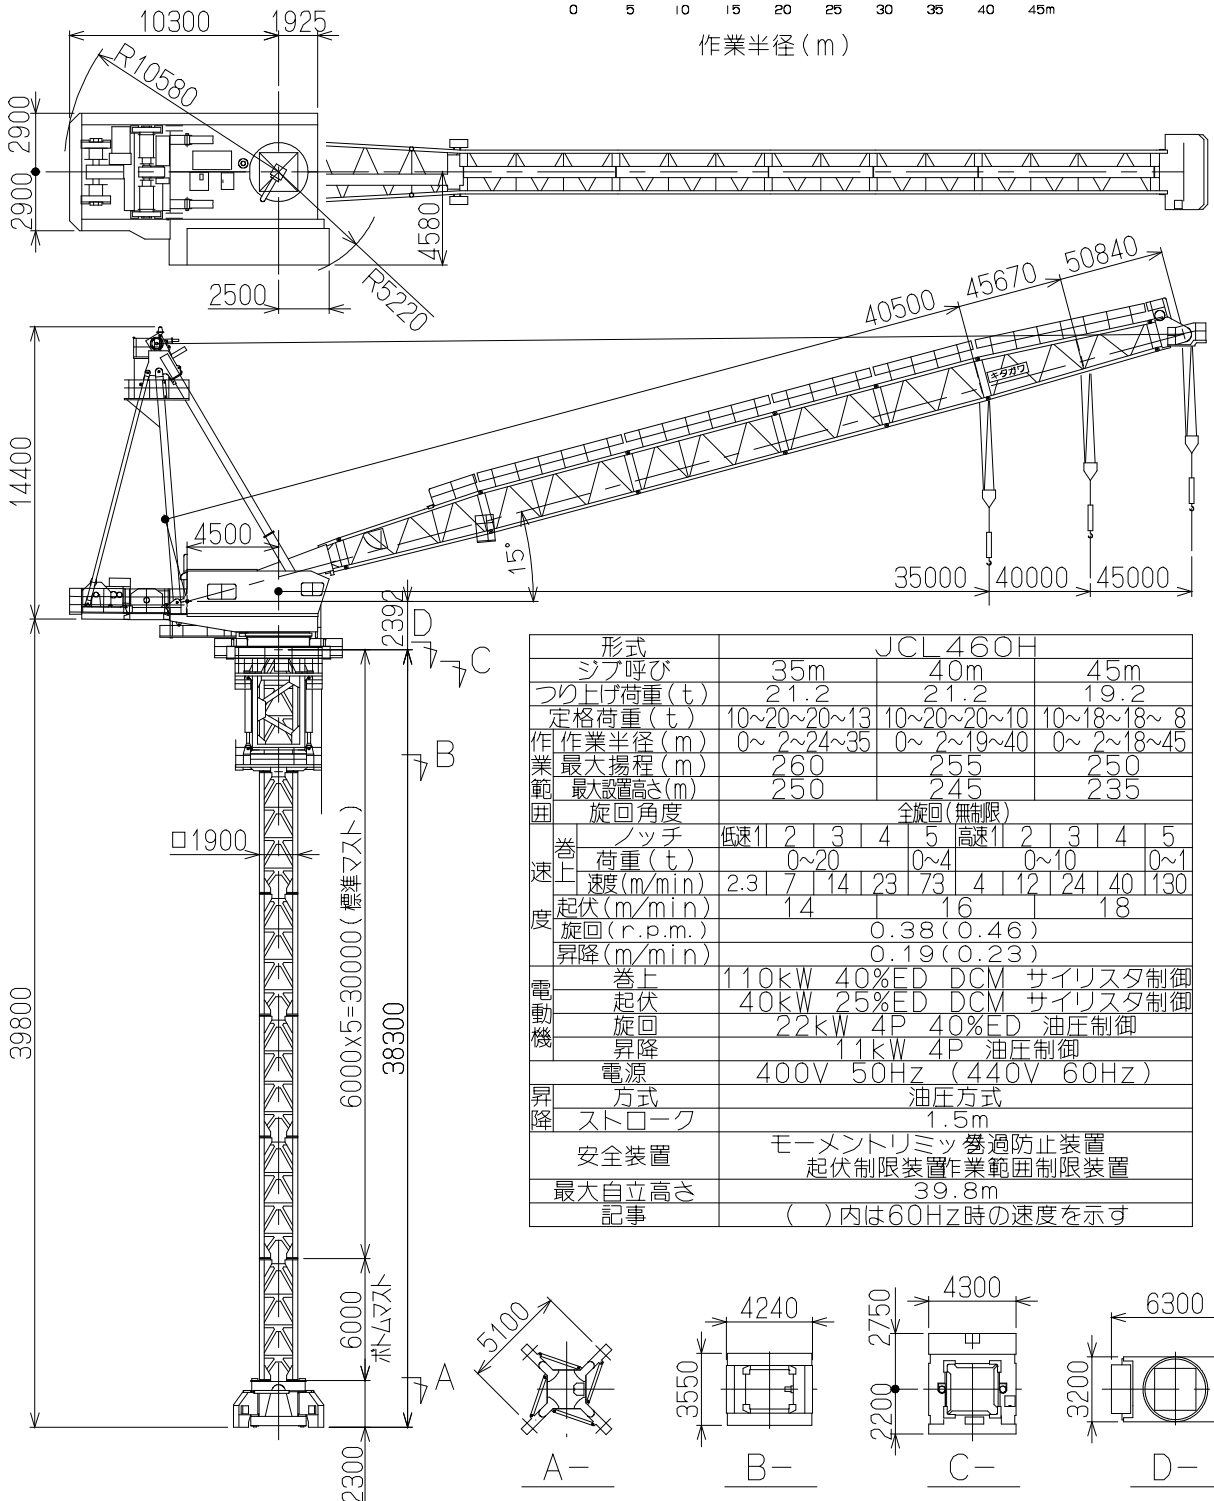


JCL460H

460t-m起伏ジブ式クレーン

(株)北川鉄工所

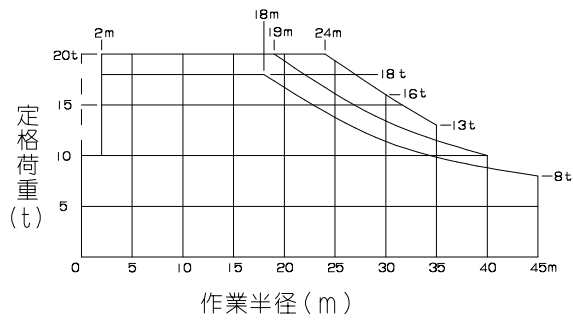

		JCL460H																			
形式	シブ呼び	35m					40m					45m									
	つり上げ荷重(t)	21.2					21.2					19.2									
	定格荷重(t)	10~20~20~13					10~20~20~10					10~18~18~8									
	作業半径(m)	0~2~24~35					0~2~19~40					0~2~18~45									
	最大揚程(m)	260					255					250									
	最大設置高さ(m)	250					245					235									
用	旋回角度	全旋回(無制限)																			
巻上	スッチ	低速1 2 3 4 5 高速1 2 3 4 5																			
	荷重(t)	0~20					0~4					0~10					0~1				
	速度(m/min)	2.3	7	14	23	73	4	12	24	40	130										
度	起伏(m/min)	14																			
	旋回(r.p.m.)	0.38(0.46)																			
電動機	昇降(m/min)	0.19(0.23)																			
	巻上	110kW 40%ED DCM サイリスタ制御																			
	起伏	40kW 25%ED DCM サイリスタ制御																			
昇降	旋回	22kW 4P 40%ED 油圧制御																			
	昇降	11kW 4P 油圧制御																			
	電源	400V 50Hz (440V 60Hz)																			
	方式	油圧方式																			
	ストローク	1.5m																			
	安全装置	モーメントリミット器 過防止装置 起伏制限装置 作業範囲制限装置																			
	最大自立高さ	39.8m																			
	記事	()内は60Hz時の速度を示す																			